
TOWNSHIP 9 SOUTH, RANGE 35 WEST, OF THE KATEEL RIVER MERIDIAN, ALASKA

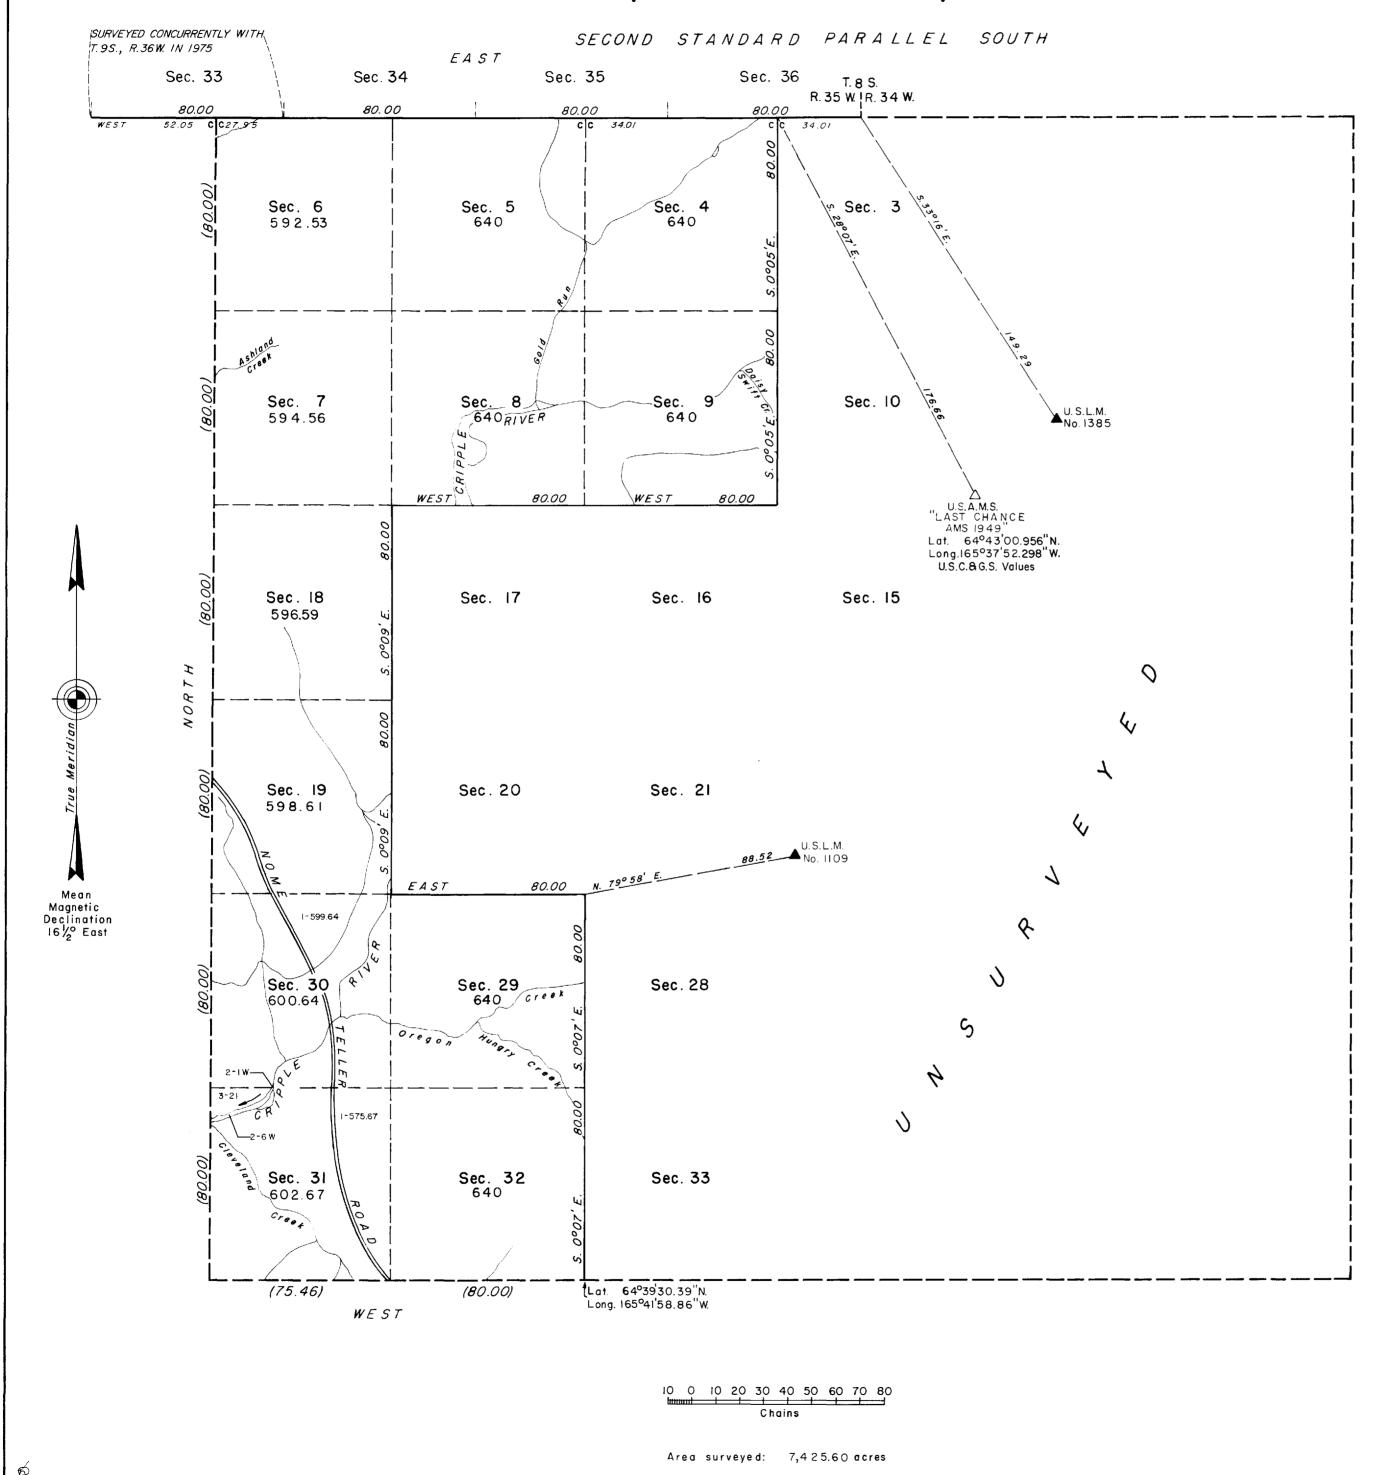

J. G. H.

The Second Standard Parallel South along a portion of the south boundary of T. 8 S., R. 35 W., was surveyed concurrently with T. 9 S., R. 36 W., Kateel River Meridian, Alaska, in 1975.

The survey of the Second Standard Parallel South along a portion of T. 8 S., R. 35 W., and a portion of the subdivisional lines of T. 9 S., R. 35 W., Kateel River Meridian, Alaska, was executed by Maurice P. Oswald and Richard K. DeCamp for Dickinson-Oswald-Walch-Lee, Engineers, beginning June 12, 1975, through July 23, 1975, under Special Instructions dated December 31, 1974, and Contract No. 52500-CT5-1068, for Group No. 226, Alaska.

The surveys executed under this contract were field inspected by Clyde Duren, Jr., Contracting Officer's Authorized Representative, and found to have been executed in strict conformance with the Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the field notes of this survey.

Portions of this township are protracted based upon the record of the surveyed lines, the plat of adjoining township concurrently prepared, protraction diagram No. K14-6, approved October 14, 1960, and the approximate line of mean high-water as shown on U.S. Geological Survey topographic maps.

Nontidal waters considered meanderable under the guidelines of the Manual of Instructions for the Survey of the Public Lands of the United States, have been segregated and defined on this plat, and are identified by the letter "W" following the given areas. Water areas so identified are subject to any riparian entitlement attaching under Revised Statute 2476. These areas are included in the total "area surveyed" for each section and for the township.

The mean magnetic delination and hydrography shown on this plat were obtained from U.S. Geological Survey topographic maps.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Denver, Colorado February 18, 1981

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

. Voorhear

Chief, Cadastral Survey Examination and Approval Staff

VEL.61

TOWNSHIP 9 SOUTH, RANGE 35 WEST, OF THE KATEEL RIVER MERIDIAN, ALASKA DEPENDENT RESURVEY AND SURVEY - DEPENDENT RESURVEY T.8S. SOUTH R.35W. R.34W. PARALLEL STANDARD SECOND Sec. 33 Sec. 32 Sec. 35 Sec. 36 Sec. 31 Sec. 34 Sec. 33 The history of surveys is contained in the field notes. WEST Sec. 5 OSWALD Sec. 4 MAURICE P. 1975 Surveyed By MAURICE P. DeCAMP IN 1975 K. Ser AND RICHARD K. Ser 80.00 This plat and the field notes represent the dependent resurvey of WEST 80.00 45.99 a portion of the Second Standard Parallel South, along the south 45.99 34.01 45.99 34.01 boundary of Township 8 South, Range 35 West, a portion of the south boundary, and a portion of the subdivisional lines of Township 9 South, Range 35 West; and the survey of a portion of the Second Standard Parallel South, along the south boundary of Township 8 South, Range 34 West, and the east boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska. Sec. 1 Sec. 3 Sec. 2 638.95 639.43 639.55 The subdivisional lines are protracted based upon the surveyed lines; the plats of adjoining townships concurrently surveyed; and the Bureau of Land Management protraction diagram K14-6. This survey was executed by Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, for Sitnasuak Native Corporation, August 23, 2004 through August 28, 2004, in accordance with the specifications set forth in the <u>Manual of Surveying Instructions</u>, 1973, the Special Sec. 11 627.65 Instructions for Group No. 919, dated May 25, 2004, approved Sec. 10 June 3, 2004, Contract No. NAC040256, dated August 17, 2004, and the Notice to Proceed dated August 20, 2004. 640 Sec. 12 640 M.S. 1385 Corner positions for this survey were determined using GPS Real-Time Kinematic techniques (RTK) and were verified using GPS 627.65 Rapid Static methodology. No lines were run on the ground. Except as indicated hereon, the lottings and areas are as indicated on the plat of Township 9 South, Range 35 West, Kateel River Meridian, Alaska, accepted February 18, 1981. The direction of all lines returned on this plat are reported as CONCURRENT mean bearings with reference to the true meridian, unless Sec. 15 Sec. 13 Sec. 16 Sec. 18 Sec. 14 Sec. 17 otherwise indicated. 136.20 136.20 DEPENDENTLY RESURVEYED 7.9S., R.36W., I NORTH Sec. 22 548.09 M.S. 1369-Sec. 23 Sec. 24 Sec. 19 Sec. 20 Sec. 21 -м.S.¦ 1366 Mean Magnetic -M.S. 1383 Declination 14° E. N. 89°58' W. S. 77°53' E. 71.21 M.S. 1384 0.10 Sec. 25 Sec. 29 Sec. 28 Sec. 27 Sec. 26 Sec. 30 640 640 589.19 630.29 630.29 589.09 Acceptance of this survey does not purport to transfer any interest in submerged lands to which the State of Alaska is entitled under the Equal Footing Doctrine and Section 6(m) of the Alaska Statehood Act, P.L. 85-508, notwithstanding the use, location, or absence of meander lines to depict water bodies. UNITED STATES DEPARTMENT OF THE INTERIOR Sec. 36 Sec. 35 Sec. 32 Sec. 33 Sec. 34 Sec. 31 BUREAU OF LAND MANAGEMENT Anchorage, Alaska This plat is strictly conformable to the approved field notes, and Lat. 64°39'30.40" N. the survey, having been correctly executed in accordance with the Long. 165°33'53.92" W. requirements of law and the regulations of this Bureau, is hereby (NAD 27) 610.67 80.03 79.99 S. 89°59' W. 80.00 /) S. 85°56'06" E. (FORWARD BEARING) N. 89°59' W. For the Director — DEPENDENT RESURVEY 10 0 10 20 30 40 "BANNER" Lat. 64°39'01.484" N. Long. 165°18'30.899" W. (NAD 27) Chains Area Surveyed: 15,193.15 Acres Deputy State Director for Cadastral Survey, Alaska

Form 9180-6 (April 1974)

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECTANGULAR VOLUME 69

PAGE 345

FIELD NOTES

OF

THE SURVEY OF
PORTIONS OF THE SECOND STANDARD PARALLEL SOUTH (SOUTH BOUNDARY OF
TOWNSHIPS 8 SOUTH, IN RANGES 32, 33, 35 AND 36 WEST); PORTIONS OF
THE NINTH GUIDE MERIDIAN WEST IN TOWNSHIPS 9 AND 11 SOUTH, BETWEEN
RANGES 36 AND 37 WEST; PORTIONS OF THE BOUNDARIES OF TOWNSHIPS 9
AND 10 SOUTH, RANGE 36 WEST, TOWNSHIPS 9 AND 10 SOUTH, RANGE 34
WEST, TOWNSHIP 10 SOUTH, RANGE 33 WEST, TOWNSHIP 11 SOUTH, RANGE
32 WEST, TOWNSHIPS 11 AND 12 SOUTH, RANGE 31 WEST AND PORTIONS OF
THE SUBDIVISIONAL LINES IN TOWNSHIPS 9 AND 10 SOUTH, RANGE 36
WEST, TOWNSHIPS 9 AND 10 SOUTH, RANGE 35 WEST, TOWNSHIPS 9 AND 10
SOUTH, RANGE 34 WEST, TOWNSHIPS 9 AND 10 SOUTH, RANGE 33 WEST,
TOWNSHIPS 10 AND 11 SOUTH, RANGE 32 WEST, AND TOWNSHIPS 10 AND 11
SOUTH, RANGE 31 WEST.
Of the KATEEL RIVER Meridian,
In the State of
EXECUTED BY
Maurice P. Oswald and Richard K. DeCamp for
Dickinson-Oswald-Walch-Lee, Engineers
Under Contract Number 52500-CT5-1068
Under special instructions dated <u>December 31</u> , 19 <u>74</u> , approved <u>January 10</u> , 1975,
, which provided for the surveys included under U.S. Survey/Group
Number 226 , and assignment instructions dated, 19
and Notice to Proceed dated May 16, 1975.
Survey commenced June 12, , 19 75
Survey completed July 23, , 19 75

INDEX TO SECTION CORNER MONUMENTS

т.	11	s.,	D	36	W.	,	Mor	Kateel	River
∃n.		~ ,	. K.,			-	wer.		

6	5	4	3	2	1
7	8	9	10	1.1	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

9th Guide Meridian West Pages 2-3

Тр.	10	s.	,	R.	_36	W.,	 Mer.	<u>Kateel</u>	_River

6	5	4	3	2	1
7	8	9	10	П	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

S. bdy. Pages 3-4 Subdivision Pages 5-8

6 5 4 3 2 I Subd 9th West 2nd Sout	er
7 8 9 10 11 12 2nd	liv
	St
18 17 16 15 14 13	
19 20 21 22 23 24	
30 29 28 27 26 25	
31 32 33 34 35 36	

S. bdy. Page 8
Subdivision Pages 8-10
9th Guide Meridian
West Pages 11-12
2nd Standard Parallel
South Pages 12-14

INDEX TO SECTION CORNER MONUMENTS

Tp. 9 S., R. 35 W., Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

2nd Standard Parallel South Pages 14-16 Subdivision Pages 16-19

Tp. 10 S., R. 35 W., Mer. Kateel River

, p					
6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 19-23

Tp. 10 S., R. 34 W., Mer. Kateel River

6	5	4	3	2	l.
7	8	9	10	[]	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 23-26 N. bdy. Pages 33-34 Subdivision Pages 34-37

INDEX TO SECTION CORNER MONUMENTS

Tp. 98., R. 34 W., Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
	32	33	34	35	36

Subdivision Pages 26-29 2nd Standard Parallel South Pages 30-31 E. bdy. Pages 31-33

Tp. 10 S., R. 33 W., Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 37-38 Subdivision Pages 47-49 S. bdy. Page 49

Tp. 9 S., R. 33 W., Mer. Kateel River

	_				
6	5	4	3	2	-
7	8	9	10	П	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 38-41 2nd Standard Parallel South Pages 41-43 Subdivision Pages 43-47

INDEX TO SECTION CORNER MONUMENTS

Tp. 11 S., R. 32 W., Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	11	12
16	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

N. bdy. Pages 49-50 Subdivision Pages 50-55

Tp. 10 S., R. 32 W., Mer. Kateel River

Subdivision Pages 55-56

Tp.	10 S.,	R.	31 W., Mer.	Kateel	River
-----	--------	----	-------------	--------	-------

6	5	4	3	2	1
7	8	9	10	П	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 56-57

INDEX TO SECTION CORNER MONUMENTS

Tp. 11 S., R. 31 W., Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	1.1	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision Pages 57-60 S. bdy. Pages 60-61

Tp. 12 S. R. 31 W. Mer. Kateel River

6	5	4	3	2	1
7	8	9	10	11	12
1:8	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

E. bdy. Pages 61-62

Tp	R		Mer		
6	5	4	3	2	-
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CHAINS

There are numerous U.S. Surveys and U.S. Mineral Surveys existing within the area covered by this survey.

This survey establishes portions of the Second Standard Parallel South (south boundary of Townships 8 South, in Ranges 32, 33, 35 and 36 West); portions of the Ninth Guide Meridian West in Townships 9 and 11 South, between Ranges 36 and 37 West; portions of the boundaries of Townships 9 and 10 South, Range 36 West, Townships 9 and 10 South, Range 34 West, Township 10 South, Range 33 West, Township 11 South, Range 32 West, Townships 11 and 12 South, Range 31 West and portions of the subdivisional lines in Townships 9 and 10 South, Range 36 West, Townships 9 and 10 South, Range 35 West, Townships 9 and 10 South, Range 34 West, Townships 9 and 10 South, Range 34 West, Townships 10 and 11 South, Range 32 West, and Townships 10 and 11 South, Range 31 West, of the Kateel River Meridian, Alaska.

This survey was executed under private contract number 52500-CT5-1068 and in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated December 31, 1974.

The lines established by this survey and described herein, along with the natural mean-high waterlines of Norton Sound within the exterior boundaries of these townships, form the boundaries of lands authorized for survey as described in the Special Instructions for Group No. 226, Alaska, dated December 31, 1974.

Bearings were obtained from existing U.S. Coast and Geodetic Survey monuments "Army Peak 2 1944" and "Banner 1944" and carried throughout this survey by sustained angulation being referred to the true meridian. Distances were determined with the use of electronic distance measuring units.

Position control, for corners in this survey, is based on existing U.S. Coast and Geodetic Survey monuments "Army Peak 2 1944" and "Banner 1944". Positions for other existing control monuments and electronic control stations set in the execution of this survey were determined by closed traverse based on the above two existing survey monuments. Details of such traverses have been thoroughly verified, and in order to simplify the record, the reductions and diagrams of these traverses are omitted from this field note record.

Corners of this survey were set from the above mentioned control points at pre-computed bearings and distances to the protracted position based upon the official Bureau of Land Management Protraction Diagrams for these townships. Corners so established show the ties to the control point(s) from which they were established. Corner positions were verified by an angular tie to two known positions.

GROUP NO. 226, ALASKA

CHAINS

Nonregulation monuments consisting of coppercoated steel rods, 36 inches long, 9/16 inch diameter, with brass caps, 1 1/2 inches diameter, (Trade name Copperweld) were authorized for use as monuments where the rectangular survey lines intersect the boundaries of mineral surveys.

The field notes are written in a continuous order around the entire bounds of the survey in order to lend continuity to the field note record.

The geographic position of the corner of Tps. 10 and 11 S., Rs. 32 and 33 W., is:Latitude 64°34'18.603"N., Longitude 165°09'52.48 "W., as determined by tie to the previously described Horizontal Control.

The mean magnetic declination is 16 1/2° East.

SURVEY OF A PORTION OF THE W. BDY. OF T.11 S., R.36 W., (9th GUIDE MERIDIAN WEST) KATEEL RIVER MERIDIAN, ALASKA


Beginning at the point for the meander cor. of secs. 7 and 12 on the 9th G.M. West, bet. Rs. 36 and 37 W., T.11 S., on the northerly shore of Norton Sound; an unsafe place for a monument.

North, along the 9th G.M. West, bet. Rs. 36 and 37 W.

Over rolling hills.

0.53 Point selected for the witness cor. to the meander cor. of secs. 7 and 12.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



1975

from which

U.S.C. & G.S. Traverse tation "SPUR 1969", a brass tablet, 3 1/2 ins. diam., seated in a boulder in place, bears S. 78°59' E., 168.28 chs. dist.

Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

W. BDY., (9th G.M. WEST) T.11 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA

-		
	CHAINS	Point for the cor. of secs. 1, 6, 7, and 12, on the 9th G.M. West; not monumented.
		North, on the 9th G.M. West, bet. secs. 1 and 6.
	:	Over steep S. Slope.
	80.00	Point for the cor. of Tps. 10 and 11 S., Rs. 36 and 37 W.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
		T10S R37W R36W
		S36 S31
		S1 S6
		T11S 1975
		Raise a mound of stone, 5 ft. base, 6 ft. high, 1 lk. W. of monument.
		Land: mountainous Soil: rock. No timber.
		SURVEY OF A PORTION OF THE SOUTH BOUNDARY, T.10 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA
		From the cor. of Tps. 10 and 11 S., Rs. 36 and 37 W.
		East, bet. secs. 6 and 31.
		Over steep hills.
	76.97	Point for the cor. of secs. 5, 6, 31, and 32; not monumented.
		East, bet. secs. 5 and 32.
		Over steep hills.
	80.00	Point for the cor. of secs. 4, 5, 32, and 33.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		<u>.</u>

S. BDY., T.10 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA

	KAILEL KIVER MERIDIAN, ALASKA
CHAINS	m10C D2CM
	T10S R36W
	S32 S33
	S5 S4
	T11S
	1975
	Raise a mound of stone, 2 1/2 ft. base, 3 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, bet. secs. 4 and 33.
	Over rolling hills.
80.00	Point for the cor. of secs. 3, 4, 33, and 34; not monumented.
	East, bet. secs. 3 and 34.
	Over rolling hills.
80.00	Point for the cor. of secs. 2, 3, 34, and 35.
	Set an iron post, 28 ins. long, 1 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R36W
	S34 S35
	S3 S2
	T11S 1975
	from which
	B.L.M. electronic control station E.C. 7, Groups 226, a 9/16 in. diam. copper coated steel rod, 36 ins. long, with a 1 1/2 in. brass cap, driven 28 ins. in the ground, in a mound of stone to top, situated on a round top mountain approx. 5 miles North of Norton Sound and 1 1/2 miles East of Cripple River, bears N.58°45'E., 225.86 chs. dist.
	The most westerly cor. of an old mine shaft 10 ft. x 10 ft. bears N.78°E., 48 lks. dist.

Raise a mound of stone, 2 ft. base, 1 1/2 feet high, 1 lk. W. of monument.

Land: mountainous.
Soil: rock, tundra, permafrost.

No timber.

CHAIÑS	
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T.10 S., R.36 W., KATEEL RIVER MERI-DIAN, ALASKA
	From the cor. of secs. 2, 3, 34, and 35, Tps. 10 and 11 S., R.36 W.
	N.0°04'W., bet. secs. 34 and 35.
	Over rolling hills.
80.00	Point for the cor. of secs. 26, 27, 34, and 35; not monumented.
	N.0°04'W., bet. secs. 26 and 27.
	Over rolling hills.
80.00	Point for the cor. of secs. 22, 23, 26, and 27.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with the brass cap mkd.
	T10S R36W
	S22 S23
	S27 S26
	1975
	from which
	B.L.M. Electronic control station E.C. 7, Group 226, hereinbefore described bears S.77°30'E., 197.95 chs. dist.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	West, bet. secs. 22 and 27.
	Over rolling hills.
80.00	Point for the cor. of secs. 21, 22, 27, and 28.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R36W
	S21 S22
	S28 S27
	1975

No accessories available at this corner.

	TO SO, MOSO WO, KAILLE KIVEK FIEKIDIAN, ALASKA
CHAINS	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	N.0°05'W., bet. secs. 21 and 22.
	Over a N. slope.
80.00	Point for the cor. of secs. 15, 16, 21, and 22.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R36W
	S16 S15
	S21 S22
	, 1975
	from which
	B.L.M. Electronic control station E.C. 7, Group 226, hereinbefore described, bears S.65°50'E., 299.68 chs. dist.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	West, bet. secs. 16 and 21.
	Over rolling hills.
80.00	Point for the cor. of secs. 16, 17, 20, and 21.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R36W
	S17 S16
	S20 S21
	1975
	from which
	B.L.M. Electronic Control Station E.C. 7, Group 226, hereinbefore described, bears S.70°53'E., 374.11 chs. dist.
	Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.

	,
CHAINS	N.0°07'W., bet. secs. 16 and 17.
	Over rolling hills along a general east slope.
80.00	Point for the cor. of secs. 8, 9, 16, and 17.
	Set an iron post, 28 ins. long, 2 1/2 ins.
	diam., 26 ins. in the ground, with brass cap mkd.
	T10S R36W
	S8 S9
	S17 S16
	1975
·	Raise a mound of stone, 3 ft. base, 3 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, tundra. No timber.
	N.0°07'W., bet. sec. 8 and 9.
	Over rolling hills.
80.00	Point for the cor. of secs. 4, 5, 8, and 9; not monumented.
	N.0°07'W., bet. secs. 4 and 5.
	Over rolling hills.
80.00	Point for the cor. of Secs. 4, 5, 32, and 33.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R36W
	S32 S33
	S5 S4
	T10S
	1975
	from which
	B.L.M. Electronic control station E.C. 6, Group 226, a 9/16 ins. copper coated steel rod, 36 ins. long, with a 1 1/2 in. diam. brass cap, driven 20 ins. in the ground, in a mound of stone, to top, situated on the N. end of a rounded knob atop a limestone and shale ridge overlooking Cripple River to the south and east, bears N.63°30'E., 298.48 chs. dist.

U.S.L.M. No. 1134, a 10x10x7 ft. limestone block, marked with an "X" and U.S.L.M.

S 1134, with a mound of stone, 3 ft. base, 2 1/2 ft. high on top, bears S.52°20'E., 68.28 chs. dist.

B.L.M. Electronic control station E.C. 7, Group 226, hereinbefore described, bears S.44°19'E., 506.70 chs. dist.

Land: mountainous.

Soil: rock, tundra, permafrost.

No timber.

SURVEY OF A PORTION OF THE SOUTH BOUNDARY OF T.9 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA.

From the cor. of secs. 4, 5, 32, and 33, Tps. 9 and 10 S., R.36 W.

West, bet. secs. 5 and 32.

Over rolling hills along a general S. slope.

80.00 Point for the cor. of secs. 5, 6, 31, and 32.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R36W

T10S 1975

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock, tundra, permafrost.

No timber.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.9 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA

From the cor. of secs. 5, 6, 31, and 32, Tps. 9 and 10 S., R.36 W.

N.0°09'W., bet. secs. 31 and 32.

Over rolling hills along a general W. slope.

80.00 Point for the cor. of secs. 29, 30, 31, and 32; not monumented.

SUBDIVISIONAL LINES,
T.9 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

N.0°09'W., bet. secs. 29 and 30.

Over rolling hills.

80.00 Point for the cor. of secs. 19, 20, 29, and 30.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R36W

S19 S20 S30 S29

1975

Raise a mound of stone 3 ft. base, 2 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock, tundra, permafrost.

No timber.

East, bet. secs. 20 and 29.

Over rolling hills.

80.00 Point for the cor. of secs. 20, 21, 28, and 29.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R36W

 S20
 S21

 S29
 S28

1975

from which

U.S. Army Map Service triangulation station "LAST CHANCE AMS 1949", a standard Corps of Engineers brass disk set flush in a rock outcrop forming a ledge in a small N. and S. ridge, bears N.75°26'E., 658.24 chs. dist.

The right edge of the center bent of five such bents under the Sinuk River bridge, on the Teller Road, bears N.14°05'W., approximately 2 1/4 miles dist.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock, tundra, permafrost.

No timber.

N.0°07'W., bet. secs. 20 and 21.

10 SUBDIVISIONAL LINES, T.9 S., R.36 W., KATEEL RIVER MERIDIAN, ALASKA CHAINS Over rolling hills, over a general NW. slope. 80.00 Point for the cor. of secs. 16, 17, 20, and 21. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T9S R36W S17 | S16 S20 S21 1975 from which B.L.M. Electronic Control Station, E.C. 5, Group 226, a 9/16 in. copper-coated steel rod, 36 ins. long, with a 1 1/2 in. diam. brass cap; driven 16 ins. into rock and in a mound of stone, to top. Point is situated atop a limestone mountain over-looking Sinuk River to the west and bears N.43°05'E., 274.16 chs. dist. Land: mountainous. Soil: rock, tundra, permafrost. No timber. West, bet. secs. 17 and 20. Valley.

Along a slight NW. slope across the Sinuk River

80.00 Point for the cor. of secs. 17, 18, 19, and 20; not monumented.

West, bet. secs. 18 and 19.

Along a slight NW. slope.

74.70 Intersect the 9th G.M. West, point for the cor. of secs. 13, 18, 19, and 24.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

> T9S R37W R36W S18 **S13** S24 S19 1975

from which

The right bank of the Sinuk River, course S. 45° W., bears East, 45 lks. dist.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. <u>high, 1 lk. W. of monument.</u>

W. BDY., T.9 S., R.36 W., (9th G.M. WEST) KATEEL RIVER MERIDIAN, ALASKA

	vis /
	SURVEY OF A PORTION OF THE W. BDY. OF T.9 S., R.36 W., (9th GUIDE MERIDIAN WEST) KATEEL RIVER MERIDIAN, ALASKA
	From the cor. of secs. 13, 18, 19, and 24, Tps. 9 S., Rs. 36 and 37 W.
	North, on the 9th G.M. West, bet. secs. 13 and 18.
	Over rolling hills along a general SE. slope.
80.	00 Point for the cor. of secs. 7, 12, 13, and 18.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S
	R37W R36W
	S12 S7
	S13 S18
	1975
	from which
	B.L.M. electronic control station E.C. 5, Group 226, hereinbefore described, bears N.70°34'E., 362.38 chs. dist.
	North, on the 9th G.M. West, bet. secs. 7 and 12.
	Over rolling hills.
80.	00 Point for the cor. of secs. 1, 6, 7, and 12; not monumented.
	North, on the 9th G.M. West, bet. secs. 1 and 6.
	Over rolling hills.
80.	ON Intersect the Second Stan. Par. S., point for the closing cor. of Tps. 9 S., Rs. 36 and 37 W.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T8S R36W
	S33
	S1 S6
	R37W R36W T9S CC
	1975

12 W. BDY., T.9 S., R.36 W., (9th G.M. WEST) KATEEL RIVER MERIDIAN, ALASKA

CHAINS	from which
	B.L.M. electronic control station, E.C. 5, Group 226, hereinbefore described, bears S.83°25'E., 344.02 chs. dist.
	From this point, the point for the stan. cor. of secs. 32 and 33, T.8 S., R.36 W., bears West, 58.11 chs. dist.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	SC
	T8S R36W
	S32 S33
	1975
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	SURVEY OF A PORTION OF THE SOUTH BOUNDARY, T.8 S., R.36 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA.
	From the closing cor. of Tps. 9 S., Rs. 36 and 37 W.
	East, along the Second Stan. Par. S.
i	Over rolling hills along a general SE slope.
21.89	Point for the stan. cor. of secs. 33 and 34; not monumented.
	East, along the Second Stan. Par. S.
	Over rolling hills.
80.00	Point for the stan. cor. of secs. 34 and 35; not monumented.
	East, along the Second Stan. Par. S.
	Over rolling hills.
52.05	Point for the closing cor. of secs. 4 and 5, T.9 S., R.36 W.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

S. BDY., T.8 S., R.36 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA

CHAINS	T8S R36W
	S35
	S5 S4
	T9S R36W CC
	1975
	from which
	B.L.M. electronic control station E.C. 5, Group 226, hereinbefore described, bears S.78°03'E., 191.93 chs. dist.
80.00	Point for stan. cor. of secs. 35 and 36; not monumented.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, along the Second Stan. Par. S.
	Along a general SE. slope and across the Sinuk River Valley over rolling terrain.
80.00	Point for the stan. cor. of Tps. 8 S., Rs. 35 and 36 W.; not monumented.
	SURVEY OF THE SOUTH BOUNDARY OF T.8 S., R.35 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA
	From the point for the stan. cor. of Tps. 8 S., Rs. 35 and 36 W.
	East, along the Second Stan. Par. S.
	Along a general SE. slope and across the Sinuk River Valley over rolling terrain.
52.05	Point for the closing cor. of secs. 2 and 3, T.9 S., R.36 W.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T8S R35W S31 S3 S2 T9S R36W
	CC 1975
	from which

S. BDY., T.8 S., R.35 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA

	KATEEL RIVER MERIDIAN, ALASKA
CHAINS	B.L.M. electronic control station E.C. 5, Group 226, hereinbefore described, bears S.34°49'E., 48.56 chs. dist.
80.00	Point for the stan. cor. of secs. 31 and 32; not monumented.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, along the Second Stan. Par. S.
	Over rolling hills.
	Point for the stan. cor. of secs. 32 and 33; not monumented.
	East, along the Second Stan. Par. S.
52.05	Point for the closing cor. of Tps.9 S., Rs. 35 and 36 W.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T8S R35W
	s 33
	S1 S6
	R36W R35W
	T9S CC 1975
	from which
	B.L.M. electronic control station E.C. 5, Group 226, hereinbefore described, bears S.73°15'W., 138.18 chs. dist.
	Cor. No. 2, Evening Lode, U.S.M.S. No. 503, a 4x4 in. fir post, firmly set, marked 2-503E on W. face, bears N.76°35'W., 17.03 chs. dist.
80.00	Point for the stan. cor. of secs. 33 and 34; not monumented.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, along the Second Stan. Par. S.
	Over rolling mountains along a general NW. slope.
80.00	Point for the stan. cor. of secs. 34 and 35; not monumented.

S. BDY., T. 8 S., R.35 W., (2d STAN. PAR. S) KATEEL RIVER MERIDIAN, ALASKA

CHAINS	
į	East, along the Second Stan. Par. S.
45.99	Point for the closing cor. of secs. 4 and 5.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
<u>.</u>	T8S R35W
	S35
	S5 S4
	T9S R35W CC
	1975
	No accessories available at this corner.
80.00	Point for the stan. cor. of secs. 35 and 36; not monumented.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, along the Second Stan. Par. S.
	Over rolling mountains.
45.99	Point for the closing cor. of secs. 3 and 4.
1	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T8S R35W S36
	S4 S3
	T9S R35W CC
·	1975
	from which
	U.S. Army Map Service triangulation station "Last Chance AMS 1949", hereinbefore described, bears S.28°07'E., 176.66 chs. dist.
	From this point the stan. cor. of T.8 S., Rs. 34 and 35 W., bears East, 34.01 chs. dist.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

S. BDY., T.8 S., R.35 W., (2d STAN. PAR. S) KATEEL RIVER MERIDIAN, ALASKA

CHAINS	7
CHAINS	SC T8S
	R35W R34W S36 S31
	1975
	from which
,	U.S.L.M. No. 1385, a 6 x 3 1/2 x 8 ft. limestone block, marked USLM No 1385 with an "X" on top, bears S.33°16'E., 149.29 chs. dist.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.9 S., R.35 W., KATEEL RIVER MERIDIAN, ALASKA
	From the closing cor. of secs. 3 and 4, T.9 S., R.35 W.
	S.0°05'E., bet. secs. 3 and 4.
	Over rolling mountains.
80.00	Point for the cor. of secs. 3, 4, 9, and 10; not monumented.
	S.0°05'E., bet. secs. 9 and 10.
	Over rolling mountains.
80.00	Point for the cor. of secs. 9, 10, 15, and 16.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R35W
·	. S9 S10
	S16 S15
	1975
	Raise a mound of stone 2 ft. base, 2 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	West, bet. secs. 9 and 16.

Over steep mountainous terrain and across Cripple River Valley.

снаійя 80.00	Point for the cor. of secs. 8, 9, 16, and 17; not monumented.
	West, bet. secs. 8 and 17.
	Over mountainous terrain.
80.00	Point for the cor. of secs. 7, 8, 17, and 18.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R35W
	S7 S8
	S18 S17
	1975
	from which
	U.S. Army Map Service triangulation station "Last Chance AMS 1949", hereinbefore described, bears N.88°58'E., 243.04 chs. dist.
	Raise a mound of stone, 2 ft. base, 2 1/2 ft. high, 1 lk. W. of monument.
,	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	S.0°09'E., bet. secs. 17 and 18.
	Over rolling mountains.
	Point for the cor. of secs. 17, 18, 19, and 20; not monumented.
	S.0°09'E., bet. secs. 19 and 20.
	Over rolling mountains.
80.00	Point for the cor. of secs. 19, 20, 29, and 30.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R35W
	S19 S20
	S30 S29
	1975
	Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	East, bet. secs. 20 and 29.
	Over rolling hills.
80.00	Point for the cor. of secs. 20, 21, 28, and 29.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R35W
	S20 S21
	S29 S28
	1975
	from which
	U.S.L.M. No. 1109, a limestone in place, 2x2x4 ft., marked with an "X" and USLM SUR 1109 on top, bears N.79°58'E., 88.52 chs. dist.
	B.L.M. electronic control station E.C. 6, Group 226, hereinbefore described, bears S.82°37'W., 209.33 chs. dist.
	Land: rolling hills. Soil: rocks, tundra, permafrost. No timber.
	S.0°07'E., bet. secs. 28 and 29.
:	Over rolling hills, across Oregon Creek Valley.
80.00	Point for the cor. of secs. 28, 29, 32, and 33; not monumented.
	S.0°07'E., bet. secs. 32 and 33.
	Over rolling hills.
80.00	Point for the cor. of secs. 4, 5, 32, and 33.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R35W
	S32 S33
	S5 S4
	T10S
	1975

CHAINS	from which
	B.L.M. electronic control station E.C. 7, Group 226, hereinbefore described, bears S.18°40'W., 383.11 chs. dist.
	Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. W. of monument.
	Land: rolling hills. Soil: rock, tundra. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.35 W., KATEEL RIVER MERIDIAN, ALASKA
	From the cor. of secs. 4, 5, 32, and 33, Tps. 9 and 10 S., R.35 W.
	S.0°07'E., bet. secs. 4 and 5.
	Over rolling mountains along a general W. slope.
80.00	Point for the cor. of secs. 4, 5, 8, and 9; not monumented.
	S.0°07'E., bet. secs. 8 and 9.
	Over rolling mountains.
80.00	Point for the cor. of secs. 8, 9, 16, and 17.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R35W
	S8 S9
	S17 S16
	1975
	from which
	B.L.M. electronic control station E.C. 7, Group 226, hereinbefore described, bears S.31°13'W., 237.26 chs. dist.
	Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, silt, permafrost. No timber.
	East, bet. secs. 9 and 16.
	Over steep mountains.
80.00	Point for the cor. of secs. 9, 10, 15, and 16.

CH	ΑI	NS

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap

T10S R35W

S9	S10
S16	S15

1975

from which

U.S. Army Map Service triangulation station "Snake AMS 1949", a standard Corps of Engineers brass disk, set in a 1 1/4 in. pipe, 15 ins. above ground, on Monument Peak, bears S.53°55'E., 333.55 chs. dist.

Raise a mound of stone, 3 ft. base, 3 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock, silt, permafrost.

No timber.

S.0°05'E., bet. secs. 15 and 16.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 15, 16, 21, and 22; not monumented.

S.0°05'E., bet. secs. 21 and 22.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 21, 22, 27, and 28.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R35W

1975

from which

B.L.M. Electronic Control Station, E.C. 7, Group 226, hereinbefore described, bears S.78°06'W., 207.78 chs. dist.

Land: mountainous.
Soil: rock, silt and permafrost.

No timber.

East, bet. secs. 22 and 27.

Across Penny River Valley.

CHAINS

14.48 Intersect line 2-3, U.S.M.S. No. 1381.

Set a 9/16 in. diam. copper-coated steel rod, 36 ins. long, 32 ins. in the ground, with a 1/2 in. diam. brass cap mkd.

1975

from which

Cor. No. 3, U.S.M.S. No. 1381, a 4x4 in.
fir post, firmly set and marked, 3/1381 C,
bears N.2°24'E., 20.98 chs. dist.

Cor. No. 2, U.S.M.S. No. 1381, a 4x4 in. fir post, firmly set and marked, 2/1381 C, bears $S.2^{\circ}24'W.$, 24.66 chs. dist.

30.94 Intersect line 4-5, U.S.M.S. No. 1381.

Set a 9/16 in. diam. copper-coated steel rod, 36 ins. long, 32 ins. in the ground, with a 1/2 in. diam. brass cap mkd.

from which

Cor. No. 4, U.S.M.S. No. 1381, a 4x4 in. fir post, firmly set and marked, 4/1381 C, bears N.4°07'E., 16.12 chs. dist.

Cor. No. 5, U.S.M.S. No. 1381, a 4x4 in. fir post, firmly set and marked, 5/1381 C, bears S.4°07'W., 24.97 chs. dist.

80.00 Point for the cor. of secs. 22, 23, 26, and 27.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R35W

1975

CHAINS	from which
	B.L.M. electronic control station E.C. 7, Group 226, hereinbefore described, bears S.81°26'W., 286.54 chs. dist.
	Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock, tundra. No timber.
	S.0°04'E., bet. secs. 26 and 27.
	Over rolling mountainous terrain.
80.00	Point for the cor. of secs. 26, 27, 34, and 35.
-	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R35W
	S27 S26
	S34 S35
	1975
	from which
	B.L.M. electronic control station E.C. 7, Group 226, hereinbefore described, bears N.82°30'W., 285.87 chs. dist.
	Land: mountainous. Soil: rock, tundra. No timber.
	East, bet. secs. 26 and 35.
	Over rolling hills.
80.00	Point for the cor. of secs. 25, 26, 35, and 36; not monumented.
	East, bet. secs. 25 and 36.
	Over rolling hills.
80.00	Point for the cor. of secs. 25, 30, 31, and 36.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S
	S25 S30
	s36 s31
	R35W R34W 1975

SUBDIVISIONAL LINES
T.10 S., R.35 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

Land: mountainous. Soil: rock, tundra.

No timber.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.34 W., KATEEL RIVER MERI-DIAN, ALASKA.

From the cor. of secs. 25, 30, 31, and 36, Tps. 10 S., Rs. 34 and 35 W.

East, bet. secs. 30 and 31.

Over rolling mountains.

76.72 Point for the cor. of secs. 29, 30, 31, and 32; not monumented.

East, bet. secs. 29 and 32.

Over rolling mountains.

80.00 Point for the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 28 ins. long. 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R34W

1975

from which

B.L.M. electronic control station E.C. 8, Group 226, a 9/16 in. copper-coated steel rod, 36 ins. long, driven 30 ins. in the ground, with a 1 1/2 in. diam. brass cap, situated atop a gravel pile, 95.6 ft. NE. of a fence corner (fence around an Agricultural Experiment Station), ±250 ft. east of Snake River Road, S. of Rock Creek, bears N.58°57'E., 183.22 chs. dist.

U.S. Army Corps of Engineers triangulation station "Anvil USE 1944", a standard Corps of Engineers brass disk set in the top of Anvil Rock, the highest and most prominent point on Anvil Mountain, bears S.63°13'E., 302.32 chs. dist.

Land: rolling mountains.

Soil: rock, tundra, permafrost.

No timber.

		T.10 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA
	CHAINS	
		N.0°07'W., bet. secs. 28 and 29.
		Over low rolling hills along the western edge of the Snake River Valley.
	80.00	Point for the cor. of secs. 20, 21, 28, and 29; not monumented.
		N.0°07'W., bet. secs. 20 and 21.
		Over low rolling hills.
	80.00	Point for the cor. of secs. 16, 17, 20, and 21.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		T10S -R34W
		S17 S16
		S20 S21
		1975
		from which
f		B.L.M. electronic control station E.C. 9, Group 226, a 9/16 in. copper-coated steel rod, 36 in. long, driven 28 ins. in the ground, with a 1 1/2 in. diam. brass cap, situated approx. 300 ft. N. of Prospect Creek, 200 ft. E. of Snake River Road, approx. 6 ft. east of a 3 ft. x 4 ft. x 12 ft. limestone boulder in place, bears N.48°34'E., 141.35 chs. dist.
	·	B.L.M. electronic control station E.C. 8, Group 226, hereinbefore described, bears S.67°24'E., 170.38 chs. dist.
		Land: rolling hills. Soil: rock, silt, tundra. No timber.
		N.0°07'W., bet. secs. 16 and 17.
		Over low rolling hills along a general E. slope up the western edge of the Snake River Valley.
	80.00	Point for the cor. of secs. 8, 9, 16, and 17; not monumented.
		N.0°07'W., bet. secs. 8 and 9.
		Over low rolling hills.
	80.00	Point for the cor. of secs. 4, 5, 8, and 9.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

mkd.

CHAINS				
-	T10S R34W			
	S5 S4			
	S8 S9			
	1975			
from which				
	B.L.M. electronic control station E.C. 9, Group 226, hereinbefore described, bears S.58°00'E., 125.36 chs. dist.			
	Land: mountainous. Soil: rocky and tundra. No timber.			
	N.0°07'W., bet. secs. 4 and 5.			
	Over low rolling hills.			
3.96	Intersect line 3-4, U.S.M.S. No. 1159.			
	Set a 9/16 in. diam. copper-coated steel rod, 36 ins. long, 24 ins. in the ground, with a 1/2 in. diam. brass cap mkd.			
	MS 1159 S5 S4 CC T10S R34W			
	1975			
	from which			
	Cor. No. 3, U.S.M.S. No. 1159, a schist stone, 24x15x13 ins., firmly set and marked 3B-3-1159, bears S.30°36'E., 9.04 chs. dist.			
	Cor. No. 4, U.S.M.S. No. 1159, identical with Cor. No. 3, No. 2 Below on Bolder Creek Placer, U.S.M.S. No. 1841, a schist stone, 27x10x6 ins., firmly set and marked 3B-4-1159, bears N.30°36'W., 9.13 chs. dist.			
18.01	Intersect line 1-2, U.S.M.S. No. 1841.			
	Set a 9/16 in. diam. copper-coated steel rod, 36 ins. long, 24 ins. in the ground, with 1 1/2 in. diam. brass cap mkd.			

CHAINS

SUBDIVISIONAL LINES T.10 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA

T10S R34W CC S5 S4 MS 1841

from which

Cor. No. 2, No. 2 Below on Bolder Creek Placer, U.S.M.S. No. 1841, identical with Cor. No. 1, U.S.M.S. No. 1159, a slate stone 35x14x5 ins. firmly set and marked 3B-1-1159 and 2-2B-1841, bears S.47°42'E., 1.75 chs. dist.

Cor. No. 1, No. 2 Below on Bolder Creek Placer, U.S.M.S. No. 1841, identical with Cor. No. 1, No. 1 Placer, U.S.M.S. No. 1841, as determined from the original witness cor., bearing N.35°52'W., 5.41 chs. dist., a schist stone 26x12x8 ins., firmly set and marked W.C. 1-1B-1-2B-1841, bears N.47°42'W., 14.51 chs. dist.

80.00 Point for the cor. of secs. 4, 5, 32, and 33; not monumented.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA.

From the cor. of secs. 4, 5, 32, and 33, Tps. 9 and 10 S., R.34 W.

N.0°07'W., bet. secs. 32 and 33.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R34W

1975

from which

B.L.M. electronic control station E.C. 10, Group 226, a 9/16 in. copper-coated steel rod, 36 ins. long, driven 32 ins. in the ground, with a 1 1/2 in. diam. brass cap, situated approx. 105 ft. east of Milepost

SUBDIVISIONAL LINES

T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

11 on Snake River Road, on a sidehill sloping to road, bears S.43°05'E., 184.41 chs. dist.

Raise a mound of stone, 3 ft. base, 3 1/2 ft. high, 1 lk. west of monument.

Land: mountainous. Soil: rock, tundra. No timber.

N.0°07'W., bet. secs. 28 and 29.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 20, 21, 28, and 29; not monumented.

N.0°07'W., bet. secs. 20 and 21.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 16, 17, 20, and 21.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R34W

1975

from which

B.L.M. electronic control station E.C. 10, Group 226, hereinbefore described, bears S.23°12'E., 320.62 chs. dist.

B.L.M. electronic control station E.C. 4, Group 226, a 9/16 in. copper-coated steel rod, 36 ins. long, driven 24 ins. in ground with a 1 1/2 in. diam. brass cap, in a mound of stone, 4 ft. base, to top; situated on a flat top mountain (approx. 250 ft. across), overlooking Bangor Creek to the South and Hazel Gulch to the East, bears N.23°06'W., 49.71 chs. dist.

Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. W. of monument.

Land: mountainous. Soil: rock and tundra. No timber.

East, bet. secs. 16 and 21.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 15, 16, 21, and 22; not monumented.

SUBDIVISIONAL LINES
T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA

CH	A	ľN	S

East, bet. secs. 15 and 22.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 14, 15, 22, and 23.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R34W

1975

from which

B.L.M. electronic control station E.C. 11, Group 226, a 9/16 in. diam. copper-coated steel rod, 36 ins. long, driven 25 ins. in the ground, with a 1 1/2 in. diam. brass cap, situated on top of a prominent rock ledge overlooking the Snake River, approx. 450 ft. west of Snake River Road and 0.9 of a mile northerly of the Seattle Creek crossing, bears N.73°09'E., 100.00 chs. dist.

Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock and tundra.

No timber.

East, bet. secs. 14 and 23.

Over a general E. slope across the Snake River.

80.00 Point for the cor. of secs. 13, 14, 23, and 24.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R34W

1975

from which

B.L.M. electronic control station E.C. 11, Group 226, hereinbefore described, bears N.28°29'E., 32.96 chs. dist.

Land: mountainous.

Soil: rock and tundra.

No timber; willow brush in river bottom.

CHAINS	N.0°02'W., bet. secs. 13 and 14.	
	·	
	Over rolling low hills along the easterly edge of the Snake River Valley.	
80.00	Point for the cor. of secs. 11, 12, 13, and 14.	
·	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.	
	T9S R34W	
	S11 S12	
	s14 s13	
	1975	
	from which	
	B.L.M. electronic control station E.C. 11, Group 226, hereinbefore described, bears S.17°10'E., 53.41 chs. dist.	
	Land: low hills and river valley. Soil: rock, tundra and permafrost. No timber.	
	N.0°02'W., bet. secs. 11 and 12.	
	Across Snake River Valley, then over a steep mountainous general E. slope.	
80.00	Point for the cor. of secs. 1, 2, 11, and 12; not monumented.	
	N.0°02'W., bet. secs. 1 and 2.	
	Across Snake River Valley then over a steep mountainous general E. Slope.	
80.00	Intersect the Second Stan. Par. S.; point for the closing cor. of secs. 1 and 2.	: !
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.	
	T8S R33W	
	S32	
	S2 S1 T9S R34W CC	
	1975	
	Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. S. of monument.	
1		ļ

SUBDIVISIONAL LINES

T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA CHAINS from which B.L.M. electronic control station E.C. 3, Group 226, a 9/16 in. diam. copper-coated steel rod, 36 ins. long, driven 15 ins. in bedrock, with a 1 1/2 in. diam. brass cap, in a mound of stone, 2 1/2 ft. base, to top, situated on a high limestone knob overlooking Willow Creek to the South and Nome River to the Southeast, bears S.76°49'E., 177.16 chs. dist. From this point the stan. cor. of Tps. 8 S., Rs. 33 and 34 W., bears West, 119.93 chs. dist. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. SC T8S **R34W** R33W S31 S36 1975 from which B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears S.82°10'E., 295.21 chs. dist. U.S.L.M. No. 1838, a lime-schist block 2x4x1 ft., in place, marked USLM 1838 and a cross on top surface, bears S.7°57'W., 134.99 chs. dist. Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. N. of monument. Land: mountainous. Soil: rock and tundra. No timber. SURVEY OF A PORTION OF THE SOUTH BOUNDARY (2d STAN. PAR. S.) T.8 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA. From the closing cor. of secs. 1 and 2, T.9 S., R.34 W. East, along the Second Stan. Par. Over rolling hills. 40.07 Point for Stan. cor. of secs. 32 and 33; not monumented. East, along the Second Stan. Par. S.

39.93 Point for the closing cor. of Tps. 9S., Rs. 33 and 34 W.

Over rolling hills.

S. BDY., T.8 S., R.33 W., (2d STAN. PAR. S) KATEEL RIVER MERIDIAN, ALASKA

	KATEEL RIVER MERIDIAN, ALASKA
CHAINS	
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T8S R33W
~	S33
	S1 S6 R34W R33W T9S CC
	1975
	from which
	B.L.M. electronic control station E.C. 11, Group 226, hereinbefore described, bears S.16°56'W., 220.59 chs. dist.
	Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. S. of monument.
	Land: mountainous. Soil: rock and tundra. No timber.
	SURVEY OF THE EAST BOUNDARY OF T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA.
	From the closing cor. of Tps. 9 S., Rs. 33 and 34 W.
	South, bet. secs. 1 and 6, Tps. 9 S., Rs. 33 and 34 W.
,	Over low rolling hills, along a general W. slope.
	Point for the cor. of secs. 1, 6, 7, and 12; not monumented.
	South, bet. secs. 7 and 12.
	Over low rolling hills along a general W. slope.
	Point for the cor. of secs. 7, 12, 13, and 18.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R34W R33W
	S12 S7
	S13 S18

1975

E. BDY., T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS	from which
	B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.37°44'E., 151.14 chs. dist.
	Land: mountainous. Soil: rock & tundra. No timber.
	South, bet. secs. 13 and 18.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 13, 18, 19, and 24; not monumented.
	South bet. secs. 19 and 24.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 19, 24, 25, and 30.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S
	R34W R33W S24 S19
	S25 S30
	1975
	from which
	B.L.M. electronic control station E.C. 11, Group 226, hereinbefore described, bears N.30°32'W., 126.52 chs. dist.
	Land: mountainous. Soil: rock, tundra, permafrost. No timber.
	South, bet. secs. 25 and 30.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 25, 30, 31, and 36; not monumented.
	South, bet. secs. 31 and 36.
	Over steep mountainous terrain.
80.00	Point for the cor. of Tps. 9 and 10 S., Rs. 33 and 34 W.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

E. BDY., T.9 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA

	KATEEL RIVER MERIDIAN, ALASKA
CHAINS	T9S R34W R33W S36 S31 S1 S6 T10S 1975
	B.L.M. electronic control station E.C. 10, Group 226, hereinbefore described, bears S.74°18'W., 201.86 chs. dist. Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument. Land: mountainous. Soil: rock, tundra. No timber.
	SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.10 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA From the cor. of Tps. 9 and 10 S., Rs. 33 and 34 W. West, bet. secs. 1 and 36.
80.00	Over steep mountainous terrain. Point for the cor. of secs. 1, 2, 35, and 36. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R34W S35 S36 S2 S1 T10S
	from which B.L.M. electronic control station E.C. 10, Group 226, hereinbefore described, bears S.64°25'W., 126.72 chs. dist. Cor. No. 2, P.D. Group on Snake River, M.S. No. 1852, a fir post, 4 ins. square, extending 1 ft. above ground, firmly set, and mkd., 1 PDGE 1852, bears N.60°27'W., 91.82 chs. dist.

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

BDY

		N. BDY., T.10 S., R.34 W.,
7	GUANG	KATEEL RIVER MERIDIAN, ALASKA
	CHAINS	Land: mountainous. Soil: rock and tundra. No timber.
		SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.34 W., KATEEL RIVER MERIDIAN, ALASKA
		From the cor. of secs. 1, 2, 35, and 36, Tps. 9 and 10 S., R.34 W.
		S.0°02'E., bet. secs. 1 and 2.
		Over steep mountainous terrain.
	80.00	Point for the cor. of secs. 1, 2, 11, and 12.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		TlOS R34W
		s2 s1
		S11 S12
		1975
		from which
		B.L.M. electronic control station E.C. 10, Group 226, hereinbefore described, bears N.77°32'W., 117.11 chs. dist.
		Raise a mound of stone, 3 ft. base, 2 ft. high, 1 1/2 lks. W. of monument.
		Land: mountainous. Soil: rock and tundra. No timber.
		West, bet. secs. 2 and 11.
		Over steep mountainous terrain.
	80.00	Point for the cor. of secs. 2, 3, 10, and 11.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		TlOS R34W
- 5		

CHAINS	from which	
	B.L.M. electronic control station E.C. 10, Group 226, hereinbefore described, bears N.53°41'W., 42.64 chs. dist.	
	Land: mountainous. Soil: rock and tundra. No timber.	
	S.0°04'E., bet. secs. 10 and 11.	
	Over rolling hills.	
80.00	Point for the cor. of secs. 10, 11, 14, and 15.	
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.	
	T10S R34W	
	S10 S11	
	S15 S14	
	1975	
	from which	
	B.L.M. electronic control station E.C. 9, Group 226, hereinbefore described, bears N.75°54'W., 55.52 chs. dist.	
	Land: rolling hills. Soil: rock, tundra and permafrost. No timber.	
	East, bet. secs. 11 and 14.	
	Over steep terrain.	
80.00	Point for the cor. of secs. 11, 12, 13, and 14.	
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.	
	T10S R34W	
	S11 S12	
	S14 S13	
	1975	
	from which	
	Cor. No. 4, No. 6 Above Right Hand Branch Placer, U.S.M.S. No. 721, a 28x12x6 in. schist boulder, firmly set and marked 4/721 bears S.0°38'W., 43.49 chs. dist.	
	B.L.M. electronic control station E.C. 8, Group 226, hereinbefore described, bears S.29°38'W., 167.43 chs. dist.	

CHAINS

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous. Soil: rock, tundra.

No timber.

S.0°02'E., bet. secs. 13 and 14.

Over mountainous terrain.

80.00 Point for the cor. of secs. 13, 14, 23, and 24.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R34W

1975

from which

B.L.M. electronic control station E.C. 8, Group 226, hereinbefore described, bears S.51°38'W., 105.61 chs. dist.

Land: mountainous.

Soil: rock, tundra, permafrost.

No timber.

East, bet. secs. 13 and 24.

Over mountainous terrain.

80.00 Point for the cor. of secs. 13, 18, 19, and 24.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S

1975

from which

B.L.M. electronic control station E.C. 12, Group 226, a 9/16 in. diam., copper-coated steel rod, 36 ins. long, driven 30 ins. in the ground, with a 1 1/2 in. diam. brass cap, situated on the North end of the top of King Mountain, N.5°E., 5 ft. from a mound of stone, 3 ft. base, 3 ft. high, bears S.43°30'E., 117.42 chs. dist.

CHAINS

U.S.L.M. No. 10 (for U.S.M.S. No. 432) a pyramid shaped rock, 6 in. top, 2 ft. base, 2 1/2 ft. high, firmly set and marked USLM 10 and a cross on top, bears S.14°51'E., 34.48 chs. dist.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous. Soil: rock and tundra. No timber.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.33 W., KATEEL RIVER MERI-DIAN, ALASKA

From the cor. of secs. 13, 18, 19, and 24, Tps. 10 S., Rs. 33 and 34 W.

East, bet. secs. 18 and 19.

Over mountainous terrain.

76.21 Point for the cor. of secs. 17, 18, 19, and 20.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R33W

1975

from which

B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.3°04'E., 85.32 chs. dist.

Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock and tundra.

No timber.

N.0°09'W., bet. secs. 17 and 18.

Over rolling hills.

80.00 Point for the cor. of secs. 7, 8, 17, and 18; not monumented.

N.0°09'W., bet. secs. 7 and 8.

Over rolling hills.

80.00 Point for the cor. of secs. 5, 6, 7, and 8.

CHAINS				
	Set an diam., mkd.	iron post, 26 ins. in	28 in	ns. long, 2 1/2 ins. ground, with brass cap
			T10 S	R33W
			\$ 6	S5
	1			

S7

1975

from which

U.S.C.&G.S. triangulation station "Banner 1944", a 3 1/2 in. brass disk on a 2 in. iron pipe, projecting 6 ins. above ground, situated on a low slope above the junction of Banner Creek and Nome River, 60 ft. SE of a ditch, bears N.58°28'E., 67.79 chs. dist.

S8

Land: mountainous. Soil: rock and tundra. No timber.

N.0°09'W., bet. secs. 5 and 6.

Over rolling hills.

80.00 Point for the cor. of secs. 5, 6, 31, and 32, not monumented.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.9 S., R.33 W., KATEEL RIVER MERI-DIAN, ALASKA

From the cor. of secs. 5, 6, 31, and 32, Tps. 9 and 10 S., R.33 W.

N.0°09'W., bet. secs. 31 and 32.

Over rolling hills.

80.00 Point for the cor. of secs. 29, 30, 31, and 32.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R33W

S30 S29

S31 S32

1975

No accessories available at this cor.

	Land: mountainous. Soil: rock and tundra. No timber.
	N.0°09'W., bet. secs. 29 and 30.
	Over rolling hills.
	Point for the cor. of secs. 19, 20, 29, and 30; not monumented.
	N.0°09'W., bet. secs. 19 and 20.
	Over rolling hills.
80.00	Point for the cor. of secs. 17, 18, 19, and 20.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R33W
	S18 S17
	S19 S20
	1975
	from which
	B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.5°07'E., 200.31 chs. dist.
	Land: rolling. Soil: rock, tundra and permafrost. No timber.
	N.0°09'W., bet. secs. 17 and 18.
	Over rolling hills along the western edge of Nome River Valley.
80.00	Point for the cor. of secs. 7, 8, 17, and 18; not monumented.
	N.0°09'W., bet. secs. 7 and 8.
	Over rolling hills along the western edge of Nome River Valley.
80.00	Point for the cor. of secs. 5, 6, 7, and 8.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R33W
	S6 S5
	S7 S8
	1975

Т		
	CHAINS	from which
		B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.24°51'E., 43.55 chs. dist.
		Raise a mound of stone, 2 ft. base, 2 ft. high, 1 lk. W. of monument.
		Land: mountainous. Soil: rock and tundra. No timber.
		East, bet. secs. 5 and 8.
		Over rolling hills.
ļ	80.00	Point for the cor. of secs. 4, 5, 8, and 9.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		T9S R33W
		S5 S4
		S8 S9
		1975
	•	
		No accessories available at this corner.
		Land: mountainous. Soil: rock and tundra. No timber.
		N.0°07'W., bet. secs. 4 and 5.
	-	Over a steep SE. slope.
	80.00	Intersect the Second Stan. Par. S.; point for the closing cor. of secs. 4 and 5.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		T8S R33W S35
		S5 S4
		T9S R33W CC
		1975
		from which
		B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears S.56°39'W., 73.63 chs. dist.
		Raise a mound of stone, 3 ft. base, 2 ft. high,

1 lk. N. of monument.

T.9 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA CHAINS mountainous. Soil: rock and tundra. No timber. SURVEY OF A PORTION OF THE SOUTH BOUNDARY (2d STAN. PAR. S.) T.8 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA From the closing cor. of secs. 4 and 5, T.9 S., R.33 W. East, along the Second Stan Par. S. Over mountainous terrain. 31.43 Intersect line 4-1 of U.S.M.S. No. 1128. Set a 9/16 ins. diam. copper-coated steel rod, 36 ins. long, 24 ins. in the ground, with a 1 1/2 in. diam. brass cap mkd. T8S R33W/ S35 MS 1128 T9S 197.5 from which U.S.L.M. No. 1128, a limestone outcrop, 20x15 ft. on top, marked, USLM No. 1128 and a cross for the true point, bears N.47°08'E., 2.31 chs. dist. Cor. No. 1, U.S.M.S. No. 1128, a limestone, 27x15x5 ins., firmly set and marked, 4B-1-1128, bears N.18°36'E., 2.38 chs. dist. Cor. No. 4, U.S.M.S. No. 1128, a limestone 26x7x4 ins., firmly set and marked, 4B-4-1128, bears S.18°36'W., 16.13 chs. dist. Left bank of Manila Creek, 10 lks. wide, 1 lk. deep, course S.50°E., bears West, 15 lks. dist. 38.28 Intersect line 1-2 of U.S.M.S. No. 1128. Set a 9/16 in. diam. copper-coated steel rod, 36 ins. long, 8 ins. in the ground and in a mound of stone, 3 ft. base, to top, with a 1 1/2 in. diam. brass cap mkd. T8S R33W S35 MS **S4** 1128

. 1975

T9S

S. BDY., T.8 S., R. 33 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA

_		
	CHAINS	from which
		Cor. No. 2, U.S.M.S. 1128, a limestone 26x18x6 ins., firmly set and marked, 4B-2-1128, bears S.69°33'E., 1.24 chs. dist.
		Cor. No. 1, U.S.M.S. 1128, hereinbefore described, bears N.69°33'W., 6.49 chs. dist.
	46.13	Point for stan. cor. of secs. 35 and 36; not monumented.
		East, along the Second Stan Par. S.
		Over mountainous terrain.
	80.00	Point for the stan. cor. of Tps. 8 S., Rs. 32 and 33 W.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
		SC T8S
		R33W R32W S36 S31
	,	1975
		from which
		B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears S.77°52'W., 191.96 chs. dist.
	,	Land: mountainous. Soil: rock and tundra. No timber.
		SURVEY OF A PORTION OF THE SOUTH BOUNDARY (2d STAN. PAR. S.) T.8 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA
		From the stan. cor. of Tps. 8 S., Rs. 32 and 33 W.
		East, along the Second Stan. Par. S.
	80.00	Point for stan. cor. of secs. 31 and 32; not monumented.
		East, along the Second Stan. Par. S.
	33.87	Point for the closing cor. of secs. 1 and 2.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
- 1		

S. BDY., T.8 S., R.32 W., (2d STAN. PAR. S.) KATEEL RIVER MERIDIAN, ALASKA

CHAINS	
	T8S R32W
	s32
	s2 s1
	CC
÷	T9S R33W
	1975
	from which
	B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears S.82°25'W., 304.24 chs. dist.
	From this point the stan. cor. of secs. 32 and 33, T.8 S., R.32 W., bears East, 46.13 chs. dist.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	SC T8S R32W
	s32 s33
	1975
	1973
	Land: mountainous. Soil: rock and tundra. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.9 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA
	From the closing cor. of secs. 1 and 2, T.9 S., R.33 W.
	S.0°02'E., bet. secs. 1 and 2.
	Over rolling hills.
80.00	Point for the cor. of secs. 1, 2, 11, and 12.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T9S R33W
	S2 S1
	S11 S12
	1975
	Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

CHAINS Land: mountainous. Soil: rock and tundra. No timber. West, bet. secs. 2 and 11. Over steep mountainous terrain. 80.00 Point for the cor. of secs. 2, 3, 10, and 11. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap **T9S R33W** S3 S10 S11 1975 from which B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.79°51'W., 225.16 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 10 and 11. Over steep mountainous terrain. 80.00 Point for the cor. of secs. 10, 11, 14, and 15. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. **T9S R33W** S10 S11 S14 S15 1975 from which B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.61°38'W., 251.96 chs. dist. Land: mountainous.

Soil: rock and tundra.

No timber.

West, bet. secs. 10 and 15.

Over steep mountainous terrain.

CHAINS	Doint for the gar of gags 0 10 15 and 16
	Point for the cor. of secs. 9, 10, 15, and 16. Set an iron post, 28 ins. long, 2 1/2 ins.
	diam., 26 ins. in the ground, with brass cap mkd.
	T9S R33W
	S9 S10
	S16 S15
	1975
	from which
	B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears N.49°51'W., 185.48 chs. dist.
	Land: mountainous. Soil: rock and tundra. No timber.
	S.0°05'E., bet. secs. 15 and 16.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 15, 16, 21, and 22.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T9S R33W
	S16 S15
	S21 S22
	1975
	from which
	B.L.M. electronic control station E.C. 3, Group 226, hereinbefore described, bears, N.35°25'W., 244.89 chs. dist.
	Land: mountainous. Soil: rock and tundra. No timber.
	S.0°05'E., bet. secs. 21 and 22.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 21, 22, 27, and 28; not monumented.
	S.0°05'E., bet. secs. 27 and 28.
	Over steep mountainous terrain.
80.00	Point for the cor. of secs. 27, 28, 33, and 34.

SUBDIVISIONAL LINES
T.9 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R33W

 S28
 S27

 S33
 S34

1975

from which

U.S.C. & G.S. triangulation station "Banner 1944" hereinbefore described, bears S.39°18'W., 160.91 chs. dist.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock and tundra.

No timber.

East, bet. secs. 27 and 34.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T9S R33W

1975

Raise a mound of stone, 3 ft. base, 2 ft. high, 1 lk. W. of monument.

Land: mountainous.

Soil: rock and tundra.

No timber.

S.0°04'E., bet. secs. 34 and 35.

Over steep mountainous terrain.

80.00 Point for the cor. of secs. 2, 3, 34, and 35.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

CHAINS	T9S R33W
· .	S34 S35
	S3 S2
	T10S
	1975
	Raise a mound of stone, 3 ft. base, 3 ft. high, 1 lk. W. of monument.
	Land: mountainous. Soil: rock and tundra. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA
	From the cor. of secs. 2, 3, 34, and 35, Tps. 9 and 10 S., R.33 W.
	S.0°04'E., bet. secs. 2 and 3.
	Over rolling hills.
80.00	Point for the cor. of secs. 2, 3, 10, and 11; not monumented.
	S.0°04'E., bet. secs. 10 and 11.
	Over rolling hills.
80.00	Point for the cor. of secs. 10, 11, 14, and 15.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T10S R33W
	S10 S11
	S15 S14
	1975
	from which
	B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.54°59'W., 287.55 chs. dist.
	Land: mountainous. Soil: rock and tundra. No timber.
	S.0°04'E., bet. secs. 14 and 15.
	Over rolling hills.

80.00 Point for the cor. of secs. 14, 15, 22, and 23; not monumented. S.0°04'E., bet. secs. 22 and 23. Over rolling hills. 80.00 Point for the cor. of secs. 22, 23, 26, and 27. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S22 S23 S27 S26 1975 from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears S.30°37'E., 211.75 chs. dist.		
Over rolling hills. 80.00 Point for the cor. of secs. 22, 23, 26, and 27. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S22 S23 S27 S26 1975 from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		Point for the cor. of secs. 14, 15, 22, and 23; not monumented.
Point for the cor. of secs. 22, 23, 26, and 27. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S22 S23 S27 S26 1975 from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S.0°04'E., bet. secs. 22 and 23.
Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S22 S23 S27 S26 1975 from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		Over rolling hills.
diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S22 S23 S27 S26 1975 from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35, not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears	80.00	Point for the cor. of secs. 22, 23, 26, and 27.
S22 S23 S26 S27 S26 S28 S26 S26 S26 S26 S26 S26 S26 S26 S26 S27 S26 S28 S26 S26		diam., 26 ins. in the ground, with brass cap
S27 S26		T10S R33W
from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S22 S23
from which B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S27 S26
B.L.M. electronic control station E.C. 12, Group 226, hereinbefore described, bears S.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		1975
Group 226, hereinbefore described, bears \$.88°47'W., 235.71 chs. dist. Land: mountainous. Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		from which
Soil: rock and tundra. No timber. S.0°04'E., bet. secs. 26 and 27. Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		Group 226, hereinbefore described, bears
Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		Soil: rock and tundra.
Over rolling hills. 80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S.0°04'E., bet. secs. 26 and 27.
80.00 Point for the cor. of secs. 26, 27, 34, and 35; not monumented. S.0°04'E., bet. secs. 34 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		
Over rolling hills. 80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35	80.00	
80.00 Point for the cor. of secs. 2, 3, 34, and 35. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears	,	S.0°04'E., bet. secs. 34 and 35.
Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		Over rolling hills.
diam., 26 ins. in the ground, with brass cap mkd. T10S R33W S34 S35 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears	80.00	Point for the cor. of secs. 2, 3, 34, and 35.
S34 S35 S3 S2 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		diam., 26 ins. in the ground, with brass cap
T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		T10S R33W
T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S34 S35
from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		S3 S2
from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		T11S
U.S.C.&G.S. triangulation station "Army Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		1975
Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears		from which
		Peak 2 1944", a standard brass disk set in bedrock on an outcrop 8 ft. diam., 1 ft. above ground, atop Army Peak, bears

Land: rolling hills. Soil: rock and tundra. No timber. SURVEY OF A PORTION OF THE SOUTH BOUNDARY OF T.10 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA From the cor. of secs. 2, 3, 34, and 35, Tps. 10 and 11 S., R.33 W. East, bet. secs. 2 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 1, 2, 35, 36; not monumented. East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills. 76.97 Point for the cor. of secs. 5, 6, 31, and 32.			
SOUTH BOUNDARY OF T.10 S., R.33 W., KATEEL RIVER MERIDIAN, ALASKA From the cor. of secs. 2, 3, 34, and 35, Tps. 10 and 11 S., R.33 W. East, bet. secs. 2 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 1, 2, 35, 36; not monumented. East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16"01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	CHAINS	Soil: rock and tundra.	
Tps. 10 and 11 S., R.33 W. East, bet. secs. 2 and 35. Over rolling hills. 80.00 Point for the cor. of secs. 1, 2, 35, 36; not monumented. East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATTEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		SOUTH BOUNDARY OF T.10 S., R.33 W., KATEEL RIVER	
Over rolling hills. 80.00 Point for the cor. of secs. 1, 2, 35, 36; not monumented. East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.			
Point for the cor. of secs. 1, 2, 35, 36; not monumented. East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		East, bet. secs. 2 and 35.	
East, bet. secs. 1 and 36. Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		Over rolling hills.	
Over rolling hills. 80.00 Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	80.00		
Intersect the 8th G.M. West; point for the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		East, bet. secs. 1 and 36.	
cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KAREL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		Over rolling hills.	
diam., 26 ins. in the ground, with brass cap mkd. T10S R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	80.00		
R33W R32W S36 S31 S1 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		diam., 26 ins. in the ground, with brass cap	
S36 S31 S6 T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		T10S	
T11S 1975 from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.			
from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	·	S1 S6	
from which U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		T11S	
U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		1975	
Peak 2 1944", hereinbefore described, bears S.16°01'W., 189.62 chs. dist. Land: rolling low hills. Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	,	from which	
Soil: tundra. No timber. SURVEY OF A PORTION OF THE NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.	·	Peak 2 1944", hereinbefore described,	
NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA. From the cor. of Tps. 10 and 11 S., Rs. 32 and 33 W. East, bet. secs. 6 and 31. Over low rolling hills.		Soil: tundra.	
33 W. East, bet. secs. 6 and 31. Over low rolling hills.		NORTH BOUNDARY OF T.11 S., R.32 W., KATEEL RIVER	
Over low rolling hills.			
		East, bet. secs. 6 and 31.	
76.97 Point for the cor. of secs. 5, 6, 31, and 32.		Over low rolling hills.	
	76.97	Point for the cor. of secs. 5, 6, 31, and 32.	

N. BDY., T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T10S R32W

S31	S32
S6	S 5

T11S

1975

from which

U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.35°23'W., 223.48 chs. dist.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, 1 lk. W. of monument.

Land: rolling hills. Soil: rock and tundra. No timber.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.11 S., R.32 W., KATEEL RIVER MERI-DIAN, ALASKA

From the cor. of secs. 5, 6, 31, and 32, Tps. 10 and 11 S., R.32 W.

S.0°09'E., bet. secs. 5 and 6.

Over low rolling hills.

80.00 Point for the cor. of secs. 5, 6, 7, and 8.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

T11S R32W

1975

from which

U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears S.51°45'W., 165.06 chs. dist.

Land: rolling hills. Soil: rock and tundra.

No timber.

S.0°09'E., bet. secs. 7 and 8.

Over low rolling hills.

SUBDIVISIONAL LINES
T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA

	TITLE OF MISS WAY KATHEN KEVEN MERIDIAN, ADADKA
	Point for the cor. of secs. 7, 8, 17, and 18; not monumented.
	S.0°09'E., bet. secs. 17 and 18.
	Over low rolling hills.
80.00	Point for the cor. of secs. 17, 18, 19, and 20.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	Tlls R32W
	S18 S17
	S19 S20
	1975
	from which
	U.S.C.&G.S. triangulation station "Army Peak 2 1944", hereinbefore described, bears N.66°02'W., 142.31 chs. dist.
	Land: rolling hills. Soil: rock and tundra. No timber.
	S.0°09'E., bet. secs. 19 and 20.
	Over low rolling hills.
	Point for the cor. of secs. 19, 20, 29, and 30; not monumented.
	S.0°09'E., bet. secs. 29 and 30.
	Over low rolling hills.
	Point for the cor. of secs. 29, 30, 31, and 32.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	Tlls R32W
1	S30 S29
	S31 S32
	1975
	from which
	U.S.C.&G.S. triagulation station "TIT 1900", a flat rock, with a l in. hole drilled in it, set in a prominent pile of rocks atop a low hill above Hastings Creek, bears S.63°54'E., 137.95 chs. dist.

CHAINS

Cor. No. 1, Lot 2, U.S. Survey No. 5270, surveyed concurrently, monumented with a regulation B.L.M. iron post, firmly set, with brass cap mkd.

C1 L2 S 5270

1975

bears S.87°06'W., 577.50 chs. dist.

Cor. No. 6, U.S.M.S. No. 440, a 4x4 in. fir post, firmly set, and marked, 6/440, bears S.87°06'W., 603.05 chs. dist.

Cor. No. 2, Lot 1, U.S. Survey No. 3791, a regulation B.L.M. iron post, firmly set, with brass cap mkd.

C2 S 3791 LOT 1

1963

bears S.85°15'W., 602.53 chs. dist.

Land: low rolling hills. Soil: rock and tundra.

No timber.

East, bet. secs. 29 and 32.

Over low rolling hills.

80.00 Point for the cor. of secs. 28, 29, 32, and 33; not monumented.

East, bet. secs. 28 and 33.

Over low rolling hills.

80.00 Point for the cor. of secs. 27, 28, 33, and 34.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

Tlls R32W

1975

from which

U.S.C.&G.S. triangulation station "TIT 1900", hereinbefore described, bears S.30°47'W., 70.71 chs. dist.

SUBDIVISIONAL LINES
T.11 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA

	Land: low rolling hills. Soil: rock and tundra. No timber.
	East, bet. secs. 27 and 34.
:	Over low rolling hills.
80.00	Point for the cor. of secs. 26, 27, 34, and 35.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T11S R32W
	S27 S26
	S34 S35
	1975
	from which
	U.S.C.&G.S. triangulation station "TIT 1900", hereinbefore described, bears S.62°25'W., 131.12 chs. dist.
	Land: low rolling hills. Soil: rock and tundra. No timber.
	N.0°04'W., bet. secs. 26 and 27.
	Over low rolling hills.
80.00	Point for the cor. of secs. 22, 23, 26, and 27; not monumented.
	N.0°04'W., bet. secs. 22 and 23.
	Over low rolling hills.
80.00	Point for the cor. of secs. 14, 15, 22, and 23.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T11S R32W
	S15 S14
	S22 S23
	1975
	from which
	U.S.C.&G.S. triangulation station "TIT 1900", hereinbefore described, bears S.27°44'W., 249.36 chs. dist.
1	

· •	TO THE WOOD WAY THE REPORT OF THE PROPERTY AND ADDRESS OF THE PROPERTY OF THE
CHAINS	Land: low rolling hills. Soil: rock and tundra. No timber.
	East, bet. secs. 14 and 23.
	Over low rolling hills.
80.00	Point for the cor. of secs. 13, 14, 23, and 24.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T11S R32W
	S14 S13
	S23 S24
	1975
	from which
	U.S.C.&G.S. triangulation station "TIT 1900", hereinbefore described, bears S.41°38'W., 295.23 chs. dist.
	Land: low rolling hills. Soil: rock and tundra. No timber.
	N.0°02'W., bet. secs. 13 and 14.
	Over rolling land.
80.00	Point for the cor. of secs. 11, 12, 13, and 14; not monumented.
	N.0°02'W., bet. secs. 11 and 12.
	Over rolling land.
80.00	Point for the cor. of secs. 1, 2, 11, and 12.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	T11S R32W
	S2 S1
·	S11 S12
	1975
	from which
	B.L.M. electronic control station E.C. 2, Group 226, a 9/16 in. diam. copper-coated steel rod, 36 ins. long, driven 30 ins. in the ground with a 1 1/2 in. diam. brass cap; situated on a slight NW. slope approx. 1/4 mile S. of the Eldorado

		T. II S., R. 32 W., KATEEL RIVER MERIDIAN, ALASKA
	CHAINS	
		River and cabins along it at a point approx. 1/2 mile upstream from its confluence with Flambeau River, bears S.57°07'E., 273.90 chs. dist.
		Land: low river bottom. Soil: rock, tundra and muskeg. No timber.
		N.0°02'W., bet. secs. 1 and 2.
		Over rolling land and swamp.
	80.00	Point for the cor. of secs. 1, 2, 35, and 36.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
		T10S R32W
		s35 s36
		s2 s1
		T11S
		1975
		from which
		B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.45°10'E., 324.40 chs. dist.
		Land: low rolling. Soil: rock, tundra and muskeg. No timber.
		SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.32 W., KATEEL RIVER MERI-DIAN, ALASKA.
:		From the cor. of secs. 1, 2, 35, and 36, Tps. 10 and 11 S., R.32 W.
		N.0°02'W., bet. secs. 35 and 36.
	80.00	Point for the cor. of secs. 25, 26, 35, and 36.
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
•		T10S R32W
		S26 S25
		S35 S36
	· 	1975
	1	1

from which

	T.10 S., R.32 W., KATEEL RIVER MERIDIAN, ALASKA
CHAINS	
	B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.36°42'E., 385.03 chs. dist.
	Land: low and rolling. Soil: rock, tundra and muskeg. No timber.
	East, bet. secs. 25 and 36.
	Over low rolling land.
80.00	Point for the cor. of secs. 25, 30, 31, and 36.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	T10s
	R32W R31W S25 S30
	S36 S31
	'
	1975
	from which
S .	B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.25°54'E., 343.29 chs. dist.
	The left bank of a small creek, 12 lks. wide, 3 lks. deep, course S.30°W., bears West, 12 lks. dist.
	Land: low and rolling. Soil: rock, tundra, muskeg. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.10 S., R.31 W., KATEEL RIVER MERI- DIAN, ALASKA
	From the cor. of secs. 25, 30, 31, and 36, Tps. 10 S., Rs. 31 and 32 W.
	East, bet. secs. 30 and 31.
	Over low rolling land.
	Point for the cor. of secs. 29, 30, 31, and 32; not monumented.
	East, bet. secs. 29 and 32.
	Over low rolling land.
80.00	Point for the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

HAINS	
	T10S R31W
	S29 S28
	S32 S33
	1975
	from which
	B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.1°19'W., 308.98 chs. dist.
	Land: low river bottom. Soil: rock, tundra and muskeg. No timber.
	S.0°07'E., bet. secs. 32 and 33.
	Over rolling land.
79.58	Point selected for the witness cor. to the cor. of secs. 4, 5, 32, and 33.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	WC T10S R31W
	S32 S33
	S5 S4
	T11S
	1975
	from which
	B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.1°49'06"W., 229.64 chs. dist.
	N. shore of a small lake, bears South, 12 lks. dist.
80.00	True point for the cor. of secs. 4, 5, 32, and 33, falls in small lake; not monumented.
	Land: low and rolling. Soil: rock, tundra and muskeg. No timber.
	SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES OF T.11 S., R.31 W., KATEEL RIVER MERI-DIAN, ALASKA
	From the true cor. point of secs. 4, 5, 32, and 33, Tps. 10 and 11 S., R.31 W.

-			
	CHAINS	S.0°07'E., bet. secs. 4 and 5.	
		Over low rolling land.	
	80.00	Point for the cor. of secs. 4, 5, 8, and 9; not monumented.	
		S.0°07'E., bet. secs. 8 and 9.	
	# - - - - - -	Over low rolling land.	
	80.00	Point for the cor. of secs. 8, 9, 16, and 17.	
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.	
		T11S R31W	
		S8 S9	
		S17 S16	
		1975	
		from which	
		B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears S.6°19'W., 69.32 chs. dist.	
		Land: low and rolling. Soil: tundra and muskeg. No timber.	
		East, bet. secs. 9 and 16.	
		Over swamp and small lakes.	
	80.00	Point for the cor. of secs. 9, 10, 15, and 16, falls in large lake; not monumented.	
		S.0°05'E., bet. secs. 15 and 16.	
		Over swamp and lakes.	
	26.26	Point selected for a witness point on line between secs. 15 and 16.	
		Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.	
		WP	
		S16 S15	
		T11S R31W	
		1975	
		from which	

	T.11 S., R.31 W., KATEEL RIVER MERIDIAN, ALASKA
CHAINS	B.L.M. electronic control station, E.C. 2, Group 226, hereinbefore described, bears S.64°05'W., 97.51 chs. dist.
	The witness cor. to meander cor. No. 1, of U.S.Survey No. 4403B, identical with the witness cor. to meander cor. No. 4, of U.S. Survey No. 5057, monumented with a 2 1/2 in. iron post, firmly set, with brass cap marked
	WC MC C1 C4 S 5057 S 4403B
	bears S.68°18'W., 81.75 chs. dist.
	The S. shore of a large lake, bears North, 2.05 chs. dist.
80.00	Point for the cor. of secs. 15, 16, 21, and 22; not monumented.
	S.0°05'E., bet. secs. 21 and 22.
	Over swamp and lakes.
80.00	Point for the cor. of secs. 21, 22, 27, and 28.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.
	T11S R31W
	S21 S22
	S28 S27
	1975
	from which
	B.L.M. electronic control station E.C. 2, Group 226, hereinbefore described, bears N.43°58'W., 126.62 chs. dist.
	Land: low rolling. Soil: tundra and muskeg. No timber.
	S.0°05'E., bet. secs. 27 and 28.
	Over low rolling land and swamp.
80.00	Point for the cor. of secs. 27, 28, 33, and 34; not monumented.
	S.0°05'E., bet. secs. 33 and 34.

Over low rolling land and swamp.

CHAINS

80.00 Point for the cor. of secs. 3, 4, 33, and 34.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R31W

T12S

1975

from which

U.S.C.&G.S. triangulation station "CAPE 1944", a standard brass disk cemented in a drill hole on the highest point of a rock outcrop, 100 ft. x 15 ft., situated on a ridge extending East from the highest point on Cape Nome, bears S.58°11'W., 307.84 chs. dist.

Land: low and rolling. Soil: tundra and muskeg.

No timber.

SURVEY OF A PORTION OF THE SOUTH BOUNDARY OF T.11 S., R.31 W., KATEEL RIVER MERIDIAN, ALASKA

From the cor. of secs. 3, 4, 33, and 34, Tps. 11 and 12 S., R.31 W.

East, bet. secs. 3 and 34.

Over low rolling land.

31.80 Point selected for the witness cor. to the meander corner of secs. 3 and 34.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S

$$\begin{array}{c|c}
R31W & \hline
S34 \\
WC & S3
\end{array} MC$$

T12S

1975

from which

U.S.C.&G.S. triangulation station "CAPE 1944", hereinbefore described, bears S.61°02'W., 335.03 chs. dist.

S. BDY. T.11 S., R.31 W., KATEEL RIVER MERIDIAN, ALASKA

32.10 Point for the meander cor. of secs. 3 and 34, on the northwesterly shore of Safety Sound; an unsafe place for a monument.

> SURVEY OF A PORTION OF THE EAST BOUNDARY OF T.12 S., R.31 W., KATEEL RIVER MERI-DIAN, ALASKA

Beginning at a point 105.75 chs. South of the theoretical point for the cor. of secs. 1, 6, 31, and 36, Tps. 11 and 12 S., Rs. 30 and 31 W., on the S. shoré of Safety Sound on N. side of Safety Spit.

South bet. secs. 7 and 12.

0.53 Point selected for a witness point on line bet. secs. 7 and 12.

Set a concrete filled iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.

> WP **T12S** R31W R30W S7

> > 1975

S12

from which

CHAINS

B.L.M. electronic control sta. E.C. 1, Group 226, a 9/16 in. diam. copper-coated steel rod, 36 ins. long, driven 32 ins. in the ground, with a 1 1/2 in. diam. brass cap; situated on the high point of a sand dune, approx. 150 ft. NW. of the Council Road across W. Safety Spit. Point is S.20°W., 234.5 ft. from the NW. cor. of the ferry caretakers bldg. and N.23 1/2°E. from the NE. cor. of the old Safety Roadhouse; bears N.51°15'E., 27.70 chs. dist.

U.S.L.M. No. 5, a squared spruce log, 10 ins. in cross section, 6 ft. long, firmly set, marked U.S.L.M. No. 5, bears S.54°41'E., 95 lks. dist.

Remonument with a concrete filled iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

USLM

5 No


1975

Reset the original squared spruce post 20 ins. in ground, alongside the iron post.

E. BDY., T.12 S., R.31 W., KATEEL RIVER MERIDIAN, ALASKA

CHAINS

The witness cor. to meander cor. No. 6, Lot 87, U.S. Survey No. 4107, monumented with a 2 1/2 in. diam. iron post, with brass cap, firmly set, and marked,



bears S.72°17'W., 403.66 chs. dist.

Cor. No. 3, Lot 2, U.S. Survey No. 5008, monumented with a 2 1/2 in. diam. iron post, with brass cap, firmly set, and marked,

C3 S 5008 LOT 2

bears S.76°05'W., 505.47 chs. dist.

25.47 Point selected for a witness point on line bet. secs. 7 and 12, on the S. side of Safety Spit, 3.64 chs. North of the northerly shore of Norton Sound.

Set a concrete filled iron post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.

from which

B.L.M. electronic control station E.C. 1, Group 226, hereinbefore described, bears N.27°04'E., 47.48 chs. dist.

U.S.C.&G.S. triangulation station "CAPE 1944", hereinbefore described, bears S.86°31'W., 502.76 chs. dist.

Land: rolling sand spit.

Soil: sand, rock.

No timber.

GENERAL DESCRIPTION

The lands contained within the survey boundaries vary from sand and gravel beaches along Norton Sound to rolling tundra hills and high

GENERAL DESCRIPTION CHAINS rocky mountains inland. The eastern portion around Safety Sound is low rolling tundra and swampy areas with many lakes and rivers. The Sinuk, Cripple, Penny, Snake, Nome, Flambeau, and Eldorado Rivers flow generally South from their source to Norton Sound. Vegetation consists of tundra moss and low grasses with scattered patches of willow brush along drainages. Some very small cottonwood trees were noted in several places along the Snake and Nome River Valleys. Soil consist primarly of tundra with permafrost beneath. At higher elevations, there is only exposed rock and gravel. Topsoil exists only in a few scattered areas in an extremely thin layer. The survey was accomplished using pickup trucks and helicopters for transportation.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Marshall R. Poe	Party Chief
Marvin G. Hadallar	Instrument Man
G. Corey Loyd	Instrument Man
Morris Kugzruk	Chainman
Brian Walsh	Chainman
	AN ACCOUNT.
	and the second s

CERTIFICATE OF SURVEY

for Dickinson-Oswald-Walch-Lee, Maurice P. Oswald and XX, We, Richard K. DeCamp Engineers, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 31 day of December , 1974 , and under Contract bearing date of the 15 day of April, No. 52500-CT5-1068,

1975, XI We have surveyed portions of the second standard parallel south (south boundary of Townships 8 South, in Ranges 32, 33, 35 and 36 West); portions of the Ninth Guide Meridian West in Townships 9 and 11 South, between Ranges 36 and 37 West; portions of the boundaries of Townships 9 and 10 South, Range 36 West, Townships 9 and 10 South, Range 34 West, Township 10 South, Range 33 West, Township 11 South, Range 32 West, Townships 11 and 12 South, Range 31 West and portions of the subdivisional lines in Townships 9 and 10 South, Range 36 West, Townships 9 and 10 South, Range 35 West, Townships 9 and 10 South, Range 34 West, Townships 9 and 10 South, Range 33 West, Townships 10 and 11 South, Range 32 West, and Townships 10 and 11 South, Range 31 West,

of the Kateel River Meridian, in the State of Alaska, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.


MARCH 18, 1976 (Date) Seal

CERTIFICATE OF INSPECTION

I, Clyde Duren, Jr., HEREBY CERTIFY upon honor, that the foregoing survey executed under Contract No. 52500-CT5-1068 , bearing date of the 15 day of April , 19 75, has been field inspected and found to be executed in strict conformance with the special instructions and the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Snorch 19, 1974 Contracting Officer's
Authorized Representative)

CERTIFICATE OF SURVEY

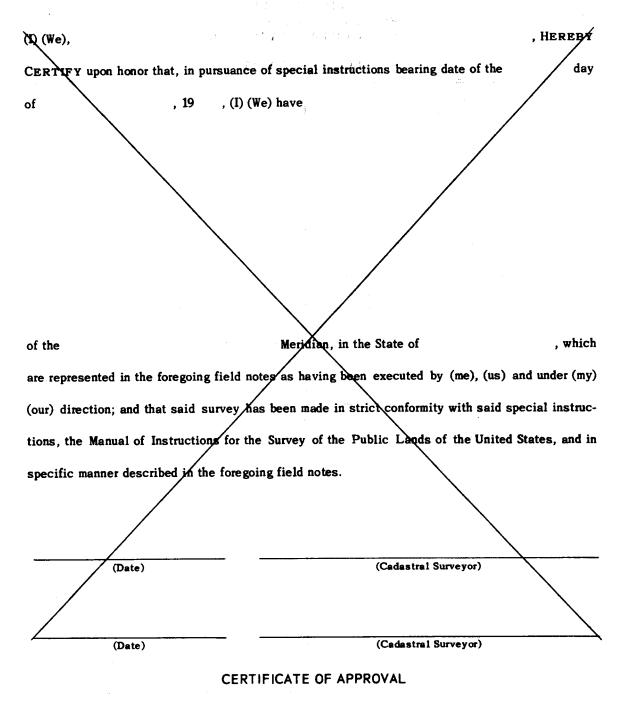

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the survey described in the certificate of survey

executed by Maurice P. Oswald and Richard K. DeCamp for Dickinson-Oswald-Walch-Lee, Engineers having been critically examined and found correct, are hereby approved.

(Date) (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing tra	nscript of the field notes of the above-described surveys in
	, is a true copy of the original field notes.
(Date)	(Chief, Division of Cadastral Survey) 670 849-626

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

PORTIONS OF THE NORTH AND WEST BOUNDARIES

A PORTION OF THE SUBDIVISIONAL LINES

THE CORRECTIVE DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SURVEY OF

PORTIONS OF THE NORTH AND WEST BOUNDARIES

AND

THE DEPENDENT RESURVEY OF

CERTAIN BOUNDARIES OF CERTAIN MINERAL SURVEYS

WITHIN

TOWNSHIP 10 SOUTH, RANGE 34 WEST

OF THE KATEEL RIVER MERIDIAN
IN THE STATE OF ALASKA

EXECUTED BY

Michael T. Birtles, Cadastral Surveyor

Under supplemental special instructions No. 1, dated May 14, 1984, approved May 21, 1984 and supplemental special instructions No. 2 dated April 1, 1985, approved May 10, 1985, which provided for the surveys included under Group Number 226, and assignment instructions dated June 5, 1984 and May 16, 1985.

Survey commenced: May 27, 1986

Survey completed: October 1, 1986

INDEX

	Township 10 South , Range 34 West	_'
	Kateel River Meridian, Alaska	
	West Boundary A Portion of the North Boundary Corrective Survey And Dependent Resurvey DEPENDENT RESURVEY OF MINERAL SURVEYS	PAGES 3-7 7-11 12-14
M.S. No.	CLAIM NAME	PAGES
347	No. 3 Below Specimen Gulch Placer	29
385	No. 9 Above Discovery On Anvil Creek Placer	42-52
403	Bench Claim No. 1	57
414	New York Bench No. 8 Placer	36, 40-42
427	Oakdale Association Placer Claim	4, 23-24, 80
428	No. 7 Above On Anvil Creek Placer	35-42
429	Adelaide K Placer	44, 46-51
447	No. 1 Below Bergstrom Gulch Placer	64-68
459	Last Chance Placer No. 2 On Specimen Gulch Placer	26-27 26
473	No. 1 Below Discovery on Glacier Creek Placer No. 2 Below Discovery on Glacier Creek Placer No. 3 Below Discovery on Glacier Creek Placer	67-70 64-68, 70 64-65, 67
704	Fraction Placer Glacier Placer Mountain Placer	71-72, 74-78 72, 74-76 71, 73-74 76, 78-79
714	No. 5 Above Placer No. 6 Above Placer No. 1 On Quartz Gulch Placer No. 2 On Quartz Gulch Placer	29-30, 34 30, 33-36 30-31, 33-34 31-33
715	No. 1 On Snow Gulch Placer No. 2 Above Snow Gulch Placer No. 3 Above Snow Gulch Placer No. 1 Above Glacier Creek Placer No. 2 Above Discovery on Glacier Creek Placer	56-58, 61-63 53, 55-56, 62-63 53-56, 63-64 58-59, 61-62 58-61
775	Holy Fright Lode claim Bernice Lode claim Bernice No. 1 Lode claim Bernice No. 2 Lode claim	32 52 52-54, 64 52
1110	Washington Association Placer Great Eastern Association Placer	71-74 71
1149	Oro Grande Placer	43, 47-51
1159	No. 3 Below Discovery	13-14, 18-19 21-22
1183	Highland Chief Placer Harold Bench Placer Sheet 1 of 2	24-25 25

INDEX

Township 10 South , Range 34 West ,

Kateel River Meridian, Alaska

DEPENDENT RESURVEY OF MINERAL SURVEYS

	DEPENDENT RESURVEY OF MINERAL SURVEYS	
M.S. No.	CLAIM NAME	PAGES
1187	No. 1 Below Discovery on Sledge Creek Placer	12
1192	No. 4 Above Placer	28-29
1221	No. 10 Above Discovery On Anvil Creek Placer No. 11 Above Discovery On Anvil Creek Placer	44-46, 49, 52 45
1223	No. 8 Above or Eva L Placer	39, 41-43
1247	No. 3 Above Placer On Anvil Creek	28
1287	No. 4 Below Specimen Gulch Placer	29
1326	No. 2 Above Specimen Gulch Placer No. 3 Above Specimen Gulch Placer	36, 40-42 41-42
1342	No. 3 Specimen Placer No. 4 Specimen Placer	27 27
1820	No. 1 On Specimen Gulch Placer	34-38
1841	Fraction Placer No. 1 Placer No. 2 Below On Boulder Creek Placer	19-20 14, 19-21 13-14, 19-22
1852	P.D.G.E. Group On Good Luck Gulch Placer P.D. Group On Snake River Placer	8-10, 15-18 10, 17-18
1857	Boston Association Claim No. 2 Placer	73, 78-79
1867	No. 1 Specimen Gulch Placer	34-36
1883	Memory Association Placer	4, 22-24, 80
2115	Seattle Banch Claim Placer	44-46
2118	Anvil Fraction Placer	34-38
2125	Banch Claim # 4	24-25

TOWNSHIP 10 SOUTH, RANGE 34 WEST KATEEL RIVER MERIDIAN, ALASKA

CHAINS The following field notes describe the dependent resurvey of portions of the north and west boundaries and a portion of the subdivisional lines, the corrective dependent resurvey of a portion of the subdivisional lines, the survey of portions of

the north and west boundaries, and the dependent resurvey of certain boundaries of certain mineral surveys within Township 10 South, Range 34 West, Kateel River Meridian, Alaska.

The following Mineral Surveys were surveyed by the following U.S. Deputy Mineral Surveyors, U.S. Mineral Surveyors or Mineral Surveyors on the respective dates:

Mineral Survey No. 332, Wm. A. Hesse, 1908

Mineral Survey No. 347, J. Potter Whittren, 1909

Mineral Survey No. 385, James M. Davidson, 1899

Mineral Survey No. 403, David Fox, Jr., 1901

Mineral Survey No. 408, Clinton Gurnee, 1901, Superseded by

Mineral Survey No. 714

Mineral Survey No. 414, David Fox, Jr., 1901

Mineral Survey No. 427, Arthur G. Blake, 1909

Mineral Survey No. 428, C. E. Davidson, 1900

Mineral Survey No. 429, Arthur G. Blake, 1900

Mineral Survey No. 432, Norman R. Smith, 1900

Mineral Survey No. 447, Arthur G. Blake, 1910

Mineral Survey No. 459, Robert J. Sommers, 1910

Mineral Survey No. 473, Arthur G. Blake, 1911

Mineral Survey No. 606, Edw. Franklin Lewis, 1904

Mineral Survey No. 704, Edw. Franklin Lewis, 1905

Mineral Survey No. 710, George M. Ashford, 1905

Mineral Survey No. 714, George M. Ashford, 1905

Mineral Survey No. 715, George M. Ashford, 1905

Mineral Survey No. 721, George M. Ashford, 1905

Mineral Survey No. 750, George M. Ashford, 1906

Mineral Survey No. 757, Arthur G. Blake, 1906

Mineral Survey No. 775, Arthur G. Blake, 1908

Mineral Survey No. 781, Arthur G. Blake, 1907

Mineral Survey No. 1110, Robert J. Sommers, 1913

Mineral Survey No. 1126, Arthur G. Blake, 1913

Mineral Survey No. 1149, Irving McK. Reed, 1914 Mineral Survey No. 1159, Irving McK. Reed, 1915

Mineral Survey No. 1183, Arthur G. Blake, 1915-1916

Mineral Survey No. 1184, Arthur G. Blake, 1916

Mineral Survey No. 1187, Irving McK. Reed, 1915

Mineral Survey No. 1192, Irving McK. Reed, 1916

Mineral Survey No. 1205, Arthur G. Blake, 1917

Mineral Survey No. 1221, Irving McK. Reed, 1917

Mineral Survey No. 1223, Irving McK. Reed, 1917

Mineral Survey No. 1247, Irving McK. Reed, 1919

Mineral Survey No. 1253, Irving McK. Reed, 1919

TOWNSHIP 10 SOUTH, RANGE 34 WEST KATEEL RIVER MERIDIAN, ALASKA

Mineral Survey No. 1287, Irving McK. Reed, 1920 Mineral Survey No. 1321, Irving McK. Reed, 1921 Mineral Survey No. 1326, Arthur G. Blake, 1922 Mineral Survey No. 1342, Irving McK. Reed, 1922 Mineral Survey No. 1343, Daniel A. Jones, 1923 Mineral Survey No. 1376, Daniel A. Jones, 1923 Mineral Survey No. 1820, Irving McK. Reed, 1924 Mineral Survey No. 1835, Arthur G. Blake, 1922 Mineral Survey No. 1840, Arthur G. Blake, 1926 Mineral Survey No. 1841, Arthur G. Blake, 1926 Mineral Survey No. 1852, Arthur G. Blake, 1927 Mineral Survey No. 1857, Arthur G. Blake, 1927 Mineral Survey No. 1862, Arthur G. Blake, 1928 Mineral Survey No. 1867, Arthur G. Blake, 1928 Mineral Survey No. 1883, Arthur G. Blake, 1935 Mineral Survey No. 1886, Robert E. Lyle, 1936 Mineral Survey No. 2115, Irving McK. Reed, 1941 Mineral Survey No. 2117, Irving McK. Reed, 1941 Mineral Survey No. 2118, Irving McK. Reed, 1941 Mineral Survey No. 2125, Irving McK. Reed, 1941 Mineral Survey No. 2270, Maurice P. Oswald, 1976 Mineral Survey No. 2271, Maurice P. Oswald, 1976

A portion of the north boundary and a portion of the subdivisional lines were surveyed by Maurice P. Oswald and Richard K. DeCamp for Dickinson, Oswald, Walch, Lee Engineers, in 1975.

A plat of Township 10 South, Range 34 West, Kateel River Meridian, Alaska, as prepared under special instructions dated December 31, 1974, for Group No. 226, Alaska, was approved February 18, 1981, and suspended on March 11, 1982. The suspension will be revoked upon approval of this survey.

The south boundary was dependently resurveyed concurrently by Michael D. Wilson, Cadastral Surveyor, in 1985 through 1986.

A portion of the east boundary was dependently resurveyed concurrently by Michael T. Birtles, Cadastral Surveyor, in 1984 through 1986.

A portion of the east boundary was surveyed concurrently by Michael T. Birtles, Cadastral Surveyor, in 1984 through 1986.

Portions of Mineral Survey Nos. 1126, 1221, 1342, 2115 and 2125, were dependently resurveyed in the survey of Township 10 South, Range 33 West, Kateel River Meridian, Alaska, by Michael T. Birtles, Cadastral Surveyor, in 1984 through 1986.

Portions of Mineral Survey Nos. 427, 757, 1184, 1247, 1857, 1862 and 1886 were dependently resurveyed concurrently with Township 11 South, Range 34 West, Kateel River Meridian, Alaska, by Michael D. Wilson, Cadastral Surveyor, in 1985 and 1986.

TOWNSHIP 10 SOUTH, RANGE 34 WEST KATEEL RIVER MERIDIAN, ALASKA

CHAINS

U.S. Survey No. 8228 was surveyed by Michael T. Birtles, Cadastral Surveyor, in 1985.

U.S. Survey No. 8709 was surveyed by Michael D. Wilson, Cadastral Surveyor, in 1986.

This survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions</u>, <u>1973</u>, supplemental special instructions No. 1 dated May 14, 1984 and supplemental special instructions No. 2 dated April 1, 1985, for Group No. 226, Alaska.

The corner of sections 1, 2, 11 and 12 was found to be out of position during the course of this survey. The rectified position for the new monument was established using corrective dependent resurvey methods and procedures.

Preliminary to the resurvey, the lines of the original survey were retraced and a search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of lines refer to the true meridian as determined by direct observations of the sun, projected by fore and backsights.

The geographic position of the corner of Townships 10 and 11 South, Ranges 33 and 34 West, as determined by a direct tie to U.S. Coast and Geodetic survey triangulation station "ANVIL USE", is:

Latitude 64°34'18.57" N., Longitude 165°21'53.23" W. NAD 27

The magnetic declination was obtained from U.S. Geological Survey quadrangle map, "NOME (C-1)", Alaska, 1950 edition, with minor revisions in 1970, and indicates a mean value of 17° East.

The term COPPERWELD as used in these field notes is a brand-name for a copper coated steel rod with a brass cap which may be authorized for use in monumentation of corners in certain areas where the use of a regulation iron post is not practical.

Dependent Resurvey of A Portion of the W. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

Beginning at the point for the cor. of Tps. 10 and 11 S., Rs. 34 and 35 W.; not monumented.

From this point, the closing cor. of secs. 6 and 31, Tps. 10 and 11 S., R. 34 W., on the E. bdy. of Oakdale Association Placer Claim, Mineral Survey No. 427, bears East, 36.90 chs. dist., monumented with an alum. post, 2 1/2 ins. diam., firmly set, extending 2 ins. above ground, with alum. cap mkd. OAPC MS427 S6 S31 T10S T11S R34W CC 1985; no accessories of record; the 1985 steel fence post, extending 3 ft. above ground, 1 lk. N. of cor.

North, bet. secs. 31 and 36, across mineral surveys.

35.65 Intersect line 6-1, Memory Association Placer, M.S. No. 1883; point for the closing cor. of secs. 31 and 36.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

T 10 S CC R 35 W R 34 W S 36 S 31 MAPMC MS 1883

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 42 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 6, Memory Association Placer, M.S. No. 1883, bears S. $59^{\circ}56'$ W., 16.764 chs. dist., hereinafter described.

From the same point, cor. No. 1, Memory Association Placer, M.S. No. 1883, bears N. 59°56′ E., 15.963 chs. dist., hereinafter described.

80.07 The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. T10S R34W R35W S25 S30 S31 S36 1975.

The original mound of stone, 4 ft. base, 3 ft. high, bears S. 50° W., 4 lks. dist.

A Portion of the W. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

CHAINS	A Portion of the W. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska
	From the cor. of secs. 25, 30, 31 and 36; hereinbefore described.
	North, bet. secs. 25 and 30.
	Over rolling, mountainous tundra.
80.00	Point for the cor. of secs. 19, 24, 25 and 30; not monumented.
	Land, rolling, mountainous tundra. Soil, decomposed schist rock. Vegetation, tundra vegetation, scattered grasses and scattered willow brush.
	North, bet. secs. 19 and 24.
	Over rolling, mountainous tundra.
80.00	Point for the cor. of secs. 13, 18, 19 and 24.
]	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with alum. cap mkd.
	T 10 S R 35 W R 34 W S 13 S 18 S 24 S 19
-	1986
:	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Build a mound of earth, 2 ft. base, 1 ft. high, E of cor.
<u> </u>	Dig pits, 12 x 18 x 12 ins., N and S of alum. post, 3 ft. dist.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	Land, rolling tundra. Soil, decomposed rocky schist. Vegetation, tundra vegetation and scattered grasses.
	North, bet. secs. 13 and 18.
	Over rolling, mountainous tundra.

A Portion of the W. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

CHAINS	
14.30	Intermittent drain, drains N. 85° W.
29.80	Intermittent drain, drains S. 45° W.; ascend steep, mountainous tundra slope.
73.85	Ascend gentle, northerly tundra slope.
80.00	Point for the cor. of secs. 7, 12, 13 and 18; not monumented.
	Land, rolling, mountainous tundra. Soil, partially decomposed rocky schist. Vegetation, tundra vegetation.
!	North, bet. secs. 7 and 12
	Over open, rolling tundra.
80.00	Point for the cor. of secs. 1, 6, 7 and 12.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	T 10 S R 35 W R 34 W S 1 S 6 S 12 S 7
	1986
	from which
	A schist stone, 36 x 30 ins., projecting 12 ins. above the ground, bears S. 62° E., 48 lks. dist., mkd. B X O.
	A schist stone, 42 x 30 ins., projecting 10 ins. above the ground, bears S. 50° W., 43 lks. dist., mkd. B X O.
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 30 ins. in the ground, W, 1 lk. dist.
	Land, rolling, mountainous tundra. Soil, rocky schist. Vegetation, alpine tundra vegetation.
	North, bet. secs. 1 and 6.

A Portion of the W. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

CHAINS	Ascend SE tundra slope.
28.90	Descend steep tundra slope.
67.90	Intermittent drain, 12 lks. wide, 1 ft. deep, course N. 48° E.
76.10	Intermittent drain, 23 lks. wide, course S. 80° E.; ascend moderate, open, rolling tundra slope.
80.00	Point for the cor. of Tps. 9 and 10 S., Rs. 34 and 35 W.
<u>.</u>	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled by a mound of stone, 3 ft. base, 12 ins. high, with alum. cap mkd.
	T 9 S R 35 W R 34 W S 36 S 31 S 1 S 6 T 10 S
	1986
	from which
	A schist stone, 30 x 36 ins., projecting 4 ins. above the ground, bears North, 26 lks. dist., mkd. B X O.
	A schist stone, 26 x 31 ins., projecting 4 ins. above the ground, bears S. 11° E., 8 lks. dist., mkd. B X O.
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 37 ins. in the ground, N, 1 lk. dist.
	Land, rolling, mountainous tundra. Soil, partially decomposed schist stone. Vegetation, tundra vegetation and scattered grasses.
	Dependent Resurvey of A Portion of the N. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska
	From the cor. of secs. 1, 2, 35 and 36, Tps. 9 and 10 S., Rs. 34 W., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. T9S R34W S1 S2 S35 S36 T10S 1975; the original mound of stone, 2 1/2 ft. base, 1 ft. high, W. of cor.

CHAINS West, bet. secs. 2 and 35. Descend open, rolling tundra slope. 66.45 Approximate centerline of Snake River Road, gravel, 23 lks. wide, bears N. 38° E. and S. 38° W. Point for the cor. of secs. 2, 3, 34 and 35; at proportionate 80.00 dist. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 1 ft. base, to the top of the alum. cap mkd. T 9 S R 34 W S 34 S 35 T 10 S 1986 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist. Land, open, rolling tundra. Soil, decomposed schist rock and alluvial gravels. Vegetation, tundra vegetation, scattered grasses and willow brush. West, bet. secs. 3 and 34. Across open, rolling tundra, among scattered thickets of willow brush. Intersect line 2-3, P.D.G.E. Group On Good Luck Gulch Placer, 5.55 M.S. No. 1852; point for the closing cor. of secs. 3 and 34. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 1 ft. base, to the top of the alum. cap mkd.

T 9 S

PDGEGOGLG R 34 W

MS 1852 / S 34

CC

S 3

T 10 S

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located in grassy tundra hummocks, among scattered patches of willow brush.

From this point, cor. No. 2, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, bears N. 24°06′ E., 3.568 chs. dist., hereinafter described.

From the same point, cor. No. 3, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, bears S. 24°06′ W., 35.183 chs. dist., hereinafter described.

Thence across the mineral survey.

33.86 Intersect line 5-1, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852; point for the closing cor. of secs. 3 and 34.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.

T 9 S
R 34 W
S 34 PDGEGOGLG
CC
S 3 MS 1852
T 10 S

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located in tundra hummocks among scattered patches of dwarf birch and willow brush.

	CHAINS	From this point, cor. No. 1, P.D.G.E. Group On Good Luck Gulch Placer, on line 3-4, P.D. Group On Snake River Placer, M.S. No. 1852 bears N. 18°19' E., 12.459 chs. dist., hereinafter described.
		From the same point, cor. No. 5, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, bears S. 18°19' W., 34.357 chs. dist., hereinafter described.
ļ	43.55	Snake River, 60 lks. wide, course S. 60° W.
ļ	80.00	Point for the cor. of secs. 3, 4, 33 and 34; at proportionate dist.; not monumented.
		Land, bottomland of Snake River. Soil, alluvial gravels. Vegetation, tundra vegetation and willow thickets.
		West, bet. secs. 4 and 33.
ļ		Ascend moderate, open, rolling tundra slope.
	63.30	Top of prominent ridge bears NE and SW; descend moderate open, rolling tundra slope.
	80.00	Point for the cor. of secs. 4, 5, 32 and 33, at proportionate dist.
		Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
١	1	T 9 S R 34 W
		S 32 S 33 S 5 S 4
		T 10 S
ł		1986
		from which
		A triangular schist stone, 48 x 48 x 22 ins., projecting 3 ins. above the ground, bears N. 52° E., 21 lks. dist., mkd. B X 0.
		A schist stone, 12 x 24 ins., facing westerly, bears S. 28° E., 49 lks. dist., mkd. B X O.
		A schist stone, 84 x 48 x 48 ins., projecting 3 ins. above the ground, bears S. 22° W., 28 lks. dist., mkd. B X O.
Į		

CHAINS	A schist stone, 22 x 35 ins., projecting 3 ins. above the ground, bears N. 20° W., 24 lks. dist., mkd. B X O.
	Deposit a clear DEEP-1 magnet 20 ins. in the ground, East, 7 lks. dist.
	Drive a steel fence post, 72 ins. long, 24 ins. in the ground, North, 1 lk. dist.
	From this point, the cor. of secs. 4, 5, 8 and 9, T. 10 S., R. 34 W., bears S. 0°07' E., 80.00 chs. dist., hereinafter described.
	From this same point, the cor. of secs. 28, 29, 32 and 33, T. 9 S., R. 34 W., bears N. 0°07' W., 80.00 chs. dist., hereinafter described.
	Land, open, rolling tundra. Soil, decomposed rocky schist. Vegetation, tundra vegetation.
	A Portion of the N. Bdy. of T. 10 S., R. 34 W., Kateel River Meridian, Alaska
	From the cor. of sec. 4, 5, 32 and 33, hereinbefore described.
	West, bet. secs. 5 and 32.
	Continue descent of moderate, open, rolling tundra slope.
6.75	Twin Mountains Creek, 18 lks. wide, 1 ft. deep, course SW; ascend moderate open, rolling tundra slope.
80.00	Point for the cor. of secs. 5, 6, 31 and 32; not monumented.
	Land, rolling, mountainous tundra. Soil, decomposed, rocky schist. Vegetation, tundra vegetation.
	West, bet. secs. 6 and 31.
	Across open, rolling tundra.
18.25	Boulder Creek, 18 lks. wide, 1 ft. deep, course SE.
69.35	Unnamed creek, 15 lks. wide, 2 ft. deep, course N. 82° E.
75.47	The cor. of Tps. 9 and 10 S., Rs. 34 and 35 W., hereinbefore described.
<u></u>	

Corrective Dependent Resurvey of A Portion of the Subdivisional Lines of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

	T. 10 S., R. 34 W., Kateel River Meridian, Alaska
CHAINS	
1	Corrective Dependent Resurvey of
	A Portion of the Subdivisional Lines of
1	T. 10 S., R. 34 W., Kateel River Meridian, Alaska
•	
	From the cor. of secs. 1, 2, 35 and 36, Tps. 9 and 10 S.,
	R. 34 W., hereinbefore described.
ŀ	S. 0°02' E., bet. secs. 1 and 2.
	Over open, rolling, mountainous tundra.
80.00	Point for the cor. of secs. 1, 2, 11 and 12; at proportionate
ļ	dist.
	Set the original 1975 iron post, 28 ins. long, 2 1/2 ins. diam.,
	20 ins. in the ground, encircled by a mound of stone, 2 1/2 ft.
	base, 1/2 ft. high, with brass cap mkd. T10S R34W S1 S2 S11 S12
}	1975; remark date to now read 1986.
	From this point, the cor. of secs. 1, 2, 11 and 12, established
	by Oswald and DeCamp in 1975, bears N. 55°10′ W., 1.50 chs.
	dist.; monumented with an iron post, 2 1/2 ins. diam., firmly
•	set, projecting 12 ins. above the ground, with brass cap mkd.
	T10S R34W S1 S2 S11 S12 1975. Remove the iron post and drive an
ļ	alum. rod to replace the iron post, 3 ft. long, 3/4 in. diam.,
	1/2 ft. in the ground to bedrock, encircled by a mound of stone,
	3 ft. base, 1 ft. high.
İ	West hat some 2 and 12
	West, bet. secs. 2 and 11.
	Over open, rolling, mountainous tundra.
	Over open, rolling, mountainous cundra.
80.00	The cor. of secs. 2, 3, 10 and 11, monumented with an iron post,
80.00	2 1/2 ins. diam., firmly set, projecting 10 ins. above the
	ground, encircled with a mound of stone, 1 1/2 ft. base, to the
	top of brass cap mkd. T10S R34W S2 S3 S10 S11 1975.
	top of brass cap mad. 1105 k34% 52 53 510 511 1975.
]	Dependent Resurvey of A Portion of the Subdivisional Lines of
ļ	Tps. 9 and 10 S., R. 34 W., Kateel River Meridian, Alaska
1	From the cor. of secs. 4, 5, 8 and 9, monumented with an iron
	post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above
1	ground, with brass cap mkd. T10S R34W S4 S5 S8 S9 1975.
	From this point, cor. No. 1, No. 1 Below Discovery on Sledge
1	Creek Placer, M.S. No. 1187, bears S. 52°51' W., 48.16 chs.
	dist., monumented with a schist stone, 3 x 12 ins., firmly set,
1	projecting 10 ins. above the ground, mkd. 1-1B/1187; not
	remonumented.
1	1


Dependent Resurvey of A Portion of the Subdivisional Lines of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

CHAINS N. 0°07' W., bet. secs. 4 and 5.

Over nearly level ground, among dense willow brush.

Intersect line 3-4, No. 3 Below Discovery Placer, M.S. No. 1159; 4.18 point for the closing cor. of secs. 4 and 5.

> Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, encircled by a mound of stone, 2 1/2 ft. base, to the top of the alum. cap mkd.



1986

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 3, No. 3 Below Discovery Placer, M.S. No. 1159, bears S. 30°36' E., 9.304 chs. dist., hereinafter described.

From the same point, cor. No. 4, No. 3 Below Discovery Placer, M.S. No. 1159, identical to cor. No. 3, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, bears N. 30°36' W., 8.864 chs. dist., hereinafter described.

From the same point, the closing cor. of secs. 4 and 5, established by Oswald and DeCamp in 1975, bears S. 74°54' E., 1.08 chs. dist., monumented with a copper-coated steel rod (Copperweld), 5/8 in. diam., firmly set, projecting 12 ins. above the ground, with a brass cap, 1 1/2 ins. diam., mkd. CC T10S R34W S5 S4 MS1159 1975.

Remark brass cap to now read

AM

1986 1975

Thence across mineral surveys.

18.10 Intersect line 1-2, No. 2 Below On Boulder Creek Placer, M.S. No. 1841; point for the closing cor. of secs. 4 and 5.

Dependent Resurvey of A Portion of the Subdivisional Lines of T. 10 S., R. 34 W., Kateel River Meridian, Alaska

CHAINS Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a mound of stone, 3 ft. base, to top of brass cap mkd.

> T 10 S | R 34 W S 5 S 4 2BOBC MS 1841

> > 1986

Drive a steel fence post, 72 ins. long, 20 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 2, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, identical with cor. No. 1, No. 3 Below Discovery Placer, M.S. No. 1159, bears S. 47°42' E., 1.910 chs. dist., hereinafter described.

From the same point, the true point for cor. No. 1, No. 2 Below On Boulder Creek Placer, identical with cor. No. 1, No. 1 Placer, M.S. No. 1841, bears N. 47°42' W., 14.303 chs. dist., hereinafter described.

From this same point, the closing cor. of secs. 4 and 5, established by Oswald and DeCamp in 1975, bears S. 52°27' E., 0.16 chs. dist., monumented with a copper-coated steel rod (Copperweld), 9/16 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap, 1 1/2 ins. diam., mkd. T10S R34W S4 S5 CC MS1841 1975.

Remark brass cap to now read

AM

1986 1975

The cor. of secs. 4, 5, 32 and 33, Tps. 9 and 10 S., R. 34 W.; at proportionate dist.; hereinbefore described.

> From this point, the cor. of secs. 28, 29, 32 and 33, bears N. 0°07' W., 80.00 chs. dist., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T9S R34W S28 S29 S32 S33 1975.

The original mound of stone, 4 ft. base, 1 ft. high, W of cor.


80.00

	Within T. 10 S., R. 34 W., Kateel River Meridian, Alaska
CHAINS	
	Dependent Resurvey of Certain Bdys. of Certain Mineral Surveys Within T. 10 S., R. 34 W., Kateel River Meridian, Alaska
	Dependent Resurvey of A Portion of Mineral Survey No. 1852
	(Restoring the 1927 survey by Arthur G. Blake)
	From cor. No. 2, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, monumented by persons unknown with an iron pipe, 1 1/2 ins. diam., loosely set, projecting 30 ins. above a mound of earth, 2 ft. base, 1/2 ft. high, unmarked; the remains of the original wood post, 4 x 6 x 27 ins. long, mkd. 2-1852-PDGE, lying alongside.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with alum. cap mkd.
	T 9 S C2 R 34 W PDGEGOGLG MS 1852
	1986
	Reset the remains of the original wood post monument and the iron pipe inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial
	Drive a steel fence post, 72 ins. long, 32 ins. in the ground, N, 1 lk. dist.
	Cor. is located among tundra hummocks and dense willow brush.
	S. 24°06' W., on line 2-3, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852.
3.568	The closing cor. of secs. 3 and 34, hereinbefore described.
6.70	Divining Creek, 6 lks. wide, 1 ft. deep, course S. 60° W.
38.751	Cor. No. 3, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, monumented with a limestone, 4 x 9 ins., firmly set, projecting 5 ins. above the ground, all markings weathered beyond recognition.

CHAINS

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 1 1/2 ft. base, to the top of the alum. cap mkd.



Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 32 ins. in the ground, N, 1 lk. dist.

S. 18°20' W., on line 3-4, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852.

8.250

Cor. No. 4, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, monumented with a schist stone, 4×12 ins., firmly set, projecting 8 ins. above the ground, mkd. 4-1852 with X on top; all other markings illegible.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 2 lks. dist.

CHAINS	Cor. is located on open, rolling tundra, among scattered berry patches.
	N. 71°42' W., on line 4-5, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852.
23.318	Cor. No. 5, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852, monumented with a schist stone, 6 x 14 ins., firmly set, flush to the ground, mkd. 5-1852/PDGE, with X on top.
	The original mound of earth, 2 ft. base, 1/2 ft. high, NE side of cor.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.
	T 10 S PDGEGOGLG R 34 W C5
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	Cor. is located on flood plain of Snake River, among dense willow brush.
	N. 18°19' E., on line 5-1, P.D.G.E. Group On Good Luck Gulch Placer, M.S. No. 1852.
34.357	The closing cor. of secs. 3 and 34, hereinbefore described.
37.25	Divining Creek, 12 lks. wide, 1 ft. deep, course S. 65° W.
46.816	Cor. No. 1, P.D.G.E. Group On Good Luck Gulch Placer, on line 3-4, P.D. Group On Snake River Placer, M.S. No. 1852, monuments with a wood post, 4 ins. sq., firmly set, rotted off flush to the ground, with the remains of the wood post, 36 ins. long, mkd. 1-1852-PDGE, lying alongside.
	At the corner point

CHAINS

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with alum. cap mkd.

PDGOSR
MS 1852
T 9 S C1
R 34 W PDGEGOGLG
MS 1852

1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on open, rolling tundra, among patches of dwarf birch and willow brush.

Dependent Resurvey of A Portion of Mineral Survey No. 1159

(Restoring the 1915 survey by Irving McK. Reed)

From cor. No. 3, No. 3 Below Discovery Placer, M.S. No. 1159, monumented with a schist stone, 13 \times 15 ins., firmly set, projecting 6 ins. above the ground, mkd. 3B-3-1159, and X on top.

The original mound of earth, 3 ft. base, 1 ft. high, S of cor.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 23 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

MS 1159 3BD C3 T 10 S R 34 W

1986

CHAINS Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 28 ins. in the ground, N, 1 lk. dist. Cor. is located in a low area, among grasses and willow brush. N. 30°36' W., on line 3-4, No. 3 Below Discovery Placer, M.S. No. 1159. 9.304 The closing cor. of secs. 4 and 5, hereinbefore described. 18.168 Cor. No. 4, No. 3 Below Discovery Placer, M.S. No. 1159, identical with cor. No. 3, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, monumented with a schist stone, 3 x 10 ins., firmly set, projecting 14 ins. above the ground, mkd. 3B-4-1159, 3-2B-1841, with an X on top. At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with alum. cap mkd. MS 1841 2BOBC . C3 🖊 T 10 S R 34 W \MS 1159 1986 Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 28 ins. in the ground, W, 2 lks. dist. Cor. is located on a northerly tundra slope, among scattered grasses and willow brush. Dependent Resurvey of A Portion of Mineral Survey No. 1841 (Restoring the 1926 survey by Arthur G. Blake)


CHAINS

From cor. No. 1, Fraction Placer, identical with cor. No. 4, No. 1 Placer, M.S. No. 1841, monumented with a schist stone, 3×10 ins., firmly set, projecting 12 ins. above the ground, mkd. 1 DF 4 1B 1841, and X on top.

The remains of the original stone and earth mound, $2 \, \text{ft.}$ base, $1 \, \text{ft.}$ high, $N \, \text{of cor.}$

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 20 ins. in the ground, encircled by a mound of stone, $2\ ft.$ base, to the top of the alum. cap mkd.



MS 1841

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 34 ins. in the ground, N, 1 lk. dist.

Cor. is located on a westerly tundra slope, among scattered willow brush.

S. 36°13' E., on line 4-1, No. 1 Placer, M.S. No. 1841.

9.874

The witness cor. to cor. No. 1, No. 1 Placer, identical with the witness cor. to cor. No. 1, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, monumented with a schist stone, 8 \times 12 ins., firmly set, projecting 12 ins. above the ground, mkd. WC 1 1B 1 2B 1841, with an X on top.

At the witness corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 25 ins. in the ground, encircled by a mound of stone, $2\ 1/2$ ft. base, to the top of the alum. cap mkd.

CHAINS	_
CIDANO	, WC
	N1 T 10 S
ļ	C1 R 34 W
	C1
	2BOBC
ĺ	MS 1841
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 33 ins. in the ground, N, 2 lks. dist.
	Cor. is located on a gentle southerly tundra slope, among dense blueberry plants and scattered willow brush.
	From the witness cor., U.S.L.M. No. 1159 bears S. 28°34′ W., 1.848 chs. dist., monumented with a schist stone, 13 x 20 ins., firmly set, projecting 36 ins. above the ground, mkd. USLM 1159 with an X on top.
15.288	True point for cor. No. 1, No. 1 Placer, identical with true point for cor. No. 1, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, falls in deep cut made by placer mining operations; not monumented due to impractical location.
	S. 47°42' E., on line 1-2, No. 2 Below On Boulder Creek Placer, M.S. No. 1841.
14.303	The closing cor. of secs. 4 and 5, hereinbefore described.
16.213	Cor. No. 2, No. 2 Below On Boulder Creek Placer, M.S. No. 1841, identical with cor. No. 1, No. 3 Below Discovery Placer, M.S. No. 1159, monumented with a schist stone, 6 x 10 ins., firmly set, projecting 18 ins. above ground, mkd. 3B-1-1159 and 2-2B-1841, with an X on top.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

CHAINS

2BOBC

MS 1841 T 10 S
C2 R 34 W
C1
3BD

1986

MS 1159

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 35 ins. in the ground, NE, 1 lk. dist.

Cor. is located on a southerly tundra slope among scattered willow brush.

Dependent Resurvey of A Portion of Mineral Survey No. 1883

(Restoring the 1935 survey by Arthur G. Blake)

From cor. No. 6, Memory Association Placer, M.S. No. 1883, monumented with two, 2 \times 4 ins. wood posts nailed together, firmly set, projecting 36 ins. above the ground, mkd. 6M, all other markings illegible.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

T 10 S R 35 W C6 MAPMC MS 1883

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 32 ins. in the ground, NE, 1 lk. dist.

CHAINS N. 59°56' E., on line 6-1, Memory Association Placer, M.S. No. 1883. 16.764 The closing cor. of secs. 31 and 36, hereinbefore described. 32.727 Cor. No. 1, Memory Association Placer, M.S. No. 1883, monumented with a schist stone, 5 x 12 ins., firmly set, projecting 12 ins. above ground, mkd. 1-M, 1883, with an X on top. The original mound of stone, 1 1/2 ft. base, 1 ft. high, bears S. 45° E., 2 lks. dist. At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd. T 10 S 1R 34 W MAPMC MS 1883 1986 Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 32 ins. in the ground, S. 30° W., 1 lk. dist. S. 28°43' W., on line 1-2, Memory Association Placer, M.S. No. 1883. 5.530 Cor. No. 2, Memory Association Placer, M.S. No. 1883, identical with cor. No. 5, Oakdale Association Placer, M.S. No. 427, monumented with two, 2 x 4 ins. wood posts nailed together, firmly set, in the center of a mound of stone, 2 ft. base, 1 ft. high, projecting 36 ins., mkd. 2-1883-M and 5-427-O on side opposite. At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

CHAINS

MAPMC / T 10 S
C2 R 34 W
MS 1883 C5
OAPC
MS 427

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 25 ins. in the ground, NE, 1 lk. dist.

Dependent Resurvey of A Portion of Mineral Survey No. 2125

(Restoring the 1941 survey by Irving McK. Reed)

From cor. No. 6, Banch Claim # 4 Placer, M.S. No. 2125, monumented, in the 1984 through 1986 survey of T. 10 S., R. 33 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap, mkd. MS2125 BC4 C6 T10S R34W 1985.

The original wood post monument is inverted and firmly set alongside the alum. post.

N. 14°24' W. on line 6-7, Banch Claim # 4 Placer, M.S. No. 2125.

8.142

Cor. No. 7, Banch Claim # 4 Placer, M.S. No. 2125, on line 3-4, Highland Chief Placer, M.S. No. 1183, monumented with a wood post, 4 ins. square, firmly set, projecting 24 ins. above the ground, mkd. 7-2125-4Bh.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

MS 1183 HC C7 T 10 S BC4 R 34 W MS 2125

1986

CHAINS

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, SW, 1 lk. dist.

From this point, cor. No. 8, Banch Claim # 4 Placer, M.S. No. 2125, identical with cor. No. 3, Highland Chief Placer, M.S. No. 1183, bears N. 76°22′ E., 3.889 chs. dist., monumented with a schist stone, 3 x 10 ins., firmly set, projecting 12 ins. above the ground, mkd. 3-1183 8 2125 4Bh; not remonumented.

Dependent Resurvey of A Portion of Mineral Survey No. 1183

(Restoring the 1915-1916 survey by Arthur G. Blake)

From cor. No. 7, Banch Claim # 4 Placer, M.S. No. 2125, on line 3-4, Highland Chief Placer, M.S. No. 1183, hereinbefore described.


S. 76°22′ W., on a portion of line 3-4, Highland Chief Placer, M.S. No. 1183.

16.081

Cor. No. 4, Highland Chief Placer, identical with cor. No. 2, Harold Bench Placer, M.S. No. 1183, monumented with a wood post, 4 ins. square, firmly set, rotted off flush to the ground, with the remains of the wood post, 20 ins. long, mkd. 1183, all other markings illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 28 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 31 ins. in the ground, NE, 1 lk. dist.

Dependent Resurvey of A Portion of Mineral Survey No. 459

(Restoring the 1910 survey by Robert J. Sommers)

From Cor. No. 5, Last Chance Placer, on line 1-2, No. 2 On Specimen Gulch Placer, M.S. No. 459, monumented with a limestone 6×10 ins., firmly set, projecting 18 ins. above the ground, mkd. 5/459 LC; not remonumented.

Erect a mound of stone around original marked stone, 4 ft. base, 2 ft. high.

Deposit a clear DEEP-1 magnet alongside the original stone monument.

Drive a steel fence post, 72 ins. long, 34 ins. in the ground, SE, 1 lk. dist.

Cor. is located in open, rolling tundra.


N. 20°39' E., on line 5-1, Last Chance Placer, M.S. No. 459.

10.619

Cor. No. 1, Last Chance Placer, M.S. No. 459, monumented with a wood post, 4 ins. square, firmly set in the center of a mound of stone, 4 ft. base, 1 ft. high, projecting 36 ins., mkd. 1-459 LC.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 32 ins. in the ground, SE, 1 lk. dist.

Cor. is located in open, rolling tundra.

N. 82°09' E., on line 1-2, Last Chance Placer, M.S. No. 459.

21.768

Cor. No. 2, Last Chance Placer, M.S. No. 459, monumented with a wood post, 4 ins. square, firmly set, projecting 36 ins. above and in the center of a mound of earth, 4 ft. base, 1 ft. high, mkd. 2-459 LC.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

C2 R 34 W LC MS 459

1986

from which

An open shaft, 8 ft. sq., 30 ft. deep, bears S. 2° E., 1.97 chs. dist.

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.

Cor. is located in open, rolling tundra.

S. 35°23' W., on line 2-3, Last Chance Placer, M.S. No. 459.

10.112

Cor. No. 3, Last Chance Placer, M.S. No. 459, identical with cor. No. 1, No. 4 Specimen Placer, and cor. No. 2, No. 3 Specimen Placer, M.S. No. 1342, monumented in the 1984 through 1986 survey of T. 10 S., R. 33 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. MS459 LC C3 C1 4S C2 3S MS1342 T10S R34W 1985.

The original wood post monument is inverted and firmly set alongside the alum. post.

CHAINS

Dependent Resurvey of A Portion of Mineral Survey No. 1192

(Restoring the 1916 survey by Irving McK. Reed)

From cor. No. 2, No. 4 Above Placer, M.S. No. 1192, identical with cor. No. 3, No. 3 Above Placer On Anvil Creek, M.S. No. 1247, monumented, in the 1985 through 1986 survey of T. 11 S., R. 34 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with alum. cap mkd. MS1192 N4APC C2 MS1247 N3ADOAC C3 T10S R34W 1985.

The original wood post, 4 ins. sq., projecting 26 ins. above the ground, mkd. 4Ab-2-1192, 3-1249, firmly set alongside the alum. post.

The 1985 steel fence post, firmly set, projecting 42 ins. above the ground, bears N, 1 lk. dist.

N. 32°56′ E., on line 2-3, No. 4 Above Placer, M.S. No. 1192.

20.730

Cor. No. 3, No. 4 Above Placer, M.S. No. 1192, monumented with a wood post, 4 ins. square, firmly set, rotted off flush to the ground, with the remains of the wood post, 36 ins. long, mkd. 4 Ab 4-1192, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with alum. cap mkd.

T 10 S R 34 W



1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

S. 53°32' E., on line 3-4, No. 4 Above Placer, M.S. No. 1192.


CHAINS

9.889

Cor. No. 4, No. 4 Above Placer, M.S. No. 1192, identical with cor. No. 3, No. 4 Below Specimen Gulch Placer, M.S. No. 1287, and cor. No. 2, No. 3 Below Specimen Gulch Placer, M.S. No. 347, and cor. No. 1, No. 5 Above Placer, M.S. No. 714, monumented with a granite stone, 7 x 14 x 27 ins., loosely set on top of the ground, mkd. 1-714 on N side, COR 4-1192, 3-1287-4B on W side, and 4A on S side, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Dependent Resurvey of A Portion of Mineral Survey No. 714

(Restoring the 1905 survey by George M. Ashford)

From cor. No. 1, No. 5 Above Placer, M.S. No. 714, identical with cor. No. 4, No. 4 Above Placer, M.S. No. 1192, cor. No. 3, No. 4 Below Specimen Gulch Placer, M.S. No. 1287, and cor. No. 2, No. 3 Below Specimen Gulch Placer, M.S. No. 347; hereinbefore described.

N. 52°36′ W., on line 1-2, No. 5 Above Placer, M.S. No. 714.

10.064

Point for cor. No. 2, No. 5 Above Placer, M.S. No. 714, at proportionate dist., falls in small drain bottom; there is no remaining evidence of the original cor.

CHAINS

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.

T 10 S 5A R 34 W C2 MS 714

1986

Deposit broken brown glass beneath the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 42 ins. in the ground, SE, 1 lk. dist.

N. 38°16′ E., on line 2-3, No. 5 Above Placer, M.S. No. 714.

20.900

Cor. No. 3, No. 5 Above Placer, identical with cor. No. 4, No. 6 Above Placer, and cor. No. 1, No. 1 On Quartz Gulch Placer, M.S. No. 714, monumented with a schist stone, 5×8 ins., firmly set, projecting 12 ins. above the ground, mkd. 3 714 on N side, 3 on S side, 1 on W side, S 40 COR 3 on E side, with X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with alum. cap mkd.

MS 714 N10QG C1 T 10 S R 34 W C4 C3 6A 5A MS 714

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 34 ins. in the ground, NE, 1 lk. dist.

N. $2^{\circ}18'$ W., on line 1-4, No. 1 On Quartz Gulch Placer, M.S. No. 714.

CHAINS

19.414

Cor. No. 4, No. 1 On Quartz Gulch Placer, identical with cor. No. 1, No. 2 On Quartz Gulch Placer, M.S. No. 714, monumented with a limestone, 2 x 10 ins., firmly set, projecting 1 in. above the ground, mkd. 1/714 on N side, SN° 20 COR 3 4 on S side, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with alum. cap mkd.

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 42 ins. in the ground, S, 1 lk. dist.

N. $10^{\circ}29'$ E., on line 1-4, No. 2 On Quartz Gulch Placer, M.S. No. 714.

4.106

Cor. No. 4, No. 2 On Quartz Gulch Placer, M.S. No. 714, monumented with a schist stone, 2 \times 10 ins., firmly set, projecting 5 ins. above the ground, mkd. 4-714 on W side, SN° 20 COR 4 on E side, with an X on top.

The original mound of earth, 4 ft. base, 1 1/2 ft. high, S of cor.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 27 ins. in the ground, with alum. cap mkd.

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 28 ins. in the ground, NE, 1 lk. dist.

Cor. is located on open, rolling tundra, among scattered patches of willow brush.

From this point, cor. No. 2, Watershed Lode claim, identical with cor. No. 1, Holy Fright Lode claim, M.S. No. 775, bears N. 79°11′ W., 1.250 chs. dist., monumented with a wood post, 4 ins. sq., firmly set, projecting 27 ins. above and in the center of a mound of earth, 3 ft. base, 1/2 ft. high, mkd. 775, all other marking illegible; not remonumented.

N. $76^{\circ}39'$ E., on line 4-3, No. 2 On Quartz Gulch Placer, M.S. No. 714.

10.456

Cor. No. 3, No. 2 On Quartz Gulch Placer, M.S. No. 714, monumented with a schist stone, 3 \times 14 ins., firmly set, projecting 6 ins. above the ground, mkd. 3/714 on N side, SN° 20 COR 6 on S side, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

T 10 S R 34 W C3 N20QG MS 714

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.

Cor. is located on rolling tundra, among dense willow brush.

S. $18^{\circ}09'$ W., on line 3-2, No. 2 On Quartz Gulch Placer, M.S. No. 714.

Dependent Resurvey of Certain Bdys. of Certain Mineral Surveys Within T. 10 S., R. 34 W., Kateel River Meridian, Alaska CHAINS 4.227 Cor. No. 2, No. 2 On Quartz Gulch Placer, identical with cor. No. 3, No. 1 On Quartz Gulch Placer, M.S. No. 714, monumented with a schist stone, 2 x 16 ins., firmly set, buried 3 ins. below the ground, mkd. 3 on S side, 2-714 on N side, with an Xon top. A schist stone, 3 x 12 ins., firmly set, alongside the original mkd. stone, mkd. SN° 20 COR 6 At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. MS 714 C3 R 34 W 1986 Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 32 ins. in the ground, NE, 1 lk. dist.


Cor. is located on a southerly slope, in open, rolling tundra.

S. $10^{\circ}12'$ W., on line 3-2, No. 1 On Quartz Gulch Placer, M.S. No. 714.

Cor. No. 2, No. 1 On Quartz Gulch Placer, on line 3-4, No. 6
Above Placer, M.S. No. 714, monumented with a schist stone, 2 x
12 ins., firmly set, projecting 8 ins. above the ground, mkd. 2
714 and SN° on side opposite, with an X on top; no other
markings legible.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



CHAINS

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.


From this point, cor No. 1, No. 1 On Quartz Gulch Placer, identical with cor. No. 4, No. 6 Above Placer, and cor. No. 3, No. 5 Above Placer, M.S. No. 714, bears S. 50°09' W., 7.486 chs. dist., hereinbefore described.

N. $50^{\circ}09'$ E., on a portion of line 4-3, No. 6 Above Placer, M.S. No. 714.

12.440

Point for cor. No. 3, No. 6 Above Placer, M.S. No. 714, identical with cor. No. 7, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 5, Anvil Fraction Placer, M.S. No. 2118, at proportionate dist., falls on edge of placer mining excavation; there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.



1986

Deposit broken brown glass beneath the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 42 ins. in the ground, SW, 1 lk. dist.


From this point, cor. No. 2, No. 6 Above Placer, M.S. No. 714, identical with cor. No. 6, No. 1 Specimen Gulch Placer, M.S. No. 1867, cor. No. 6, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 4, Anvil Fraction Placer, M.S. No. 2118, bears S. 41°18′ E., 10.077 chs. dist., monumented with a granite stone, 7 x 14 x 21 ins. long, loosely set, projecting 6 ins. above the ground, mkd. 4-2118-AF 6-1867-1S 2-714 6AB with an X on top.

The remains of the original earth and stone mound, E of cor.

At the corner point

CHAINS

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 46 ins. in the ground, NW, 1/2 lk. dist.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NOS. 1820 AND 2118

(Restoring the 1924 and 1941 surveys by Irving McK. Reed)

From cor. No. 7, No. 1 On Specimen Gulch Placer, M.S. No. 1820, identical with cor. No. 5, Anvil Fraction Placer, M.S. No. 2118, and cor. No. 3, No. 6 Above Placer, M.S. No. 714, hereinbefore described.

N. 72°50' E., on line 7-8, No. 1 On Specimen Gulch Placer, M.S. No. 1820, identical with line 5-1, Anvil Fraction Placer, M.S. No. 2118.

Across old mining excavation 10 feet deep.

0.352

Cor. No. 8, No. 1 On Specimen Gulch Placer, M.S. No. 1820, identical with cor. No. 1, Anvil Fraction Placer, M.S. No. 2118, and cor. No. 6, No. 7 Above On Anvil Creek Placer, M.S. No. 428, hereinafter described.

CHAINS

Dependent Resurvey of A Portion of Mineral Survey No. 428 And Additional Portions of Mineral Survey Nos. 1820 and 2118


(Restoring the 1900 survey by C.E. Davidson, and the 1924 and 1941 surveys by Irving McK. Reed)

From cor. No. 2, No 7 Above On Anvil Creek Placer, M.S. No. 428, identical with cor. No. 7, No. 1 Specimen Gulch Placer, M.S. No. 1867, cor. No. 10, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 3, Anvil Fraction Placer, M.S. No. 2118, monumented with a schist stone, 4 x 8 x 24 ins. long, loosely set, projecting 9 ins. above the ground, mkd. 2-428 1S, 3-2118 AF, 7-1867 7-1S, with an X on top.

The original mound of earth, 3 ft. base, 2 ft. high, S of cor.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 24 ins. in the ground, encircled by a mound of stone, $2\ ft$. base, to the top of the alum. cap mkd.



1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 32 ins. in the ground, NW, 2 lks. dist.

From this point, cor. No. 2, No. 6 Above Placer, M.S. No. 714, identical with cor. No. 6, No. 1 Specimen Gulch Placer, M.S. No. 1867, cor. No. 6, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 4, Anvil Fraction Placer, M.S. No. 2118, bears S. 54°43′ W., 0.479 chs. dist., hereinbefore described.

From the same point, the true point for cor. No. 3, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with cor. No. 4, New York Bench No. 8 Placer, M.S. No. 414, and cor. No. 6, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, bears N. 42°33′ E., 19.115 chs. dist., hereinafter described.

CHAINS

N. 45°34′ W., on line 2-1, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with line 10-9, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and line 3-2, Anvil Fraction Placer, M.S. No. 2118.

Across old placer workings covered with dense willow thickets.

5.005

Point for cor. No. 1, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with cor. No. 9, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 2, Anvil Fraction Placer, M.S. No. 2118, at proportionate dist., falls in low area of Anvil Creek; there is no remaining evidence of the original cor.

Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8 ft. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

1986

No accessories available.

N. 38°48' W., on line 1-6, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with line 9-8, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and line 2-1, Anvil Fraction Placer, M.S. No. 2118.

Across braided courses of Anvil Creek, 40 lks. wide, 2 ft. deep, and ascend steep, southeasterly tundra slope along the northerly edge of old mining excavation.

4.997

Point for cor. No. 6, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with cor. No. 8, No. 1 On Specimen Gulch Placer, M.S. No. 1820, and cor. No. 1, Anvil Fraction Placer, M.S. No. 2118, at proportionate dist., falls on cut bank of placer mining excavation. The original wood post, 4 ins. sq., 48 ins. long, mkd. 8-1820-1S, 6-428-7Ab, 1-2118-AF, is slumped to the bottom of the cut, lying on side.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

CHAINS

T 10 S R 34 W 7A MS 2118 C6 AF C1 MS 428 10SG C8 MS 1820

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit broken brown glass at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SE, 1 lk. dist.

N. $42^{\circ}45'$ E., on line 6-5, No. 7 Above On Anvil Creek Placer, M.S. No. 428.

Across open, rolling tundra, with scattered thickets of willow brush.

19.036

Point for cor. No. 5, No. 7 Above On Anvil Creek Placer, M.S. No. 428, at proportionate dist.; there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.

T 10 S R 34 W C5 7A MS 428

1986

Deposit broken brown glass beneath the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SE, 1 lk. dist.

S. 42°19′ E., on line 5-4, No. 7 Above On Anvil Creek Placer, M.S. No. 428.


Descend moderate tundra slope, among scattered willow thickets.

CHAINS 0.149

Cor. No. 4, No. 8 Above or Eva L Placer, M.S. No. 1223, monumented with a wood post, 4 x 6 ins., firmly set, rotted off flush to and in the center of a mound of earth, 2 1/2 ft. base, 1 ft. high, with the remains of the wood post, 24 ins. long, mkd. 4/1223/8A, lying alongside. A second wood post, 4 ins. sq., firmly set, rotted off alongside the 4 x 6 ins. wood post, with the remains of the 4 ins. square wood post lying along side, mkd. NW.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with alum. cap mkd.



1986

Reset the remains of the original wood posts inverted and alongside the alum. post and deposit broken brown glass at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

- Bottom of moderate tundra slope, right bank of Anvil Creek, 7 lks. wide, 1 ft. deep, course SW; across old placer workings.
- 4.995 Point for cor. No. 4, No. 7 Above On Anvil Creek Placer, M.S. No. 428, at proportionate dist.; there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 28 ins. in the ground, with alum. cap mkd.

7A C4 T 10 S MS 428 R 34 W

1986

Deposit broken brown glass beneath the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NW, 1 lk. dist.

CHAINS	Cor. falls on old placer mining tailings.
	S. 42°54' E., on line 4-3, No. 7 Above On Anvil Creek Placer, M.S. No. 428.
	Across old placer workings.
4.920	True point for cor. No. 3, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with cor. No. 4, New York Bench No. 8 Placer, M.S. No. 414, and cor. No. 6, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, falls in swampy area with seeps; not monumented due to liability of destruction by action of frost and ice.
	Dependent Resurvey of Portions of Mineral Survey Nos. 1326 and 414
	(Restoring the 1901 survey by David Fox Jr., and the 1922 survey by Arthur G. Blake, respectively)
	From the true point for cor. No. 3, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with the true point for cor. No. 4, New York Bench No. 8 Placer, M.S. No. 414, and the true point for cor. No. 6, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, hereinbefore described.
	N. 39°54' E., on line 6-1, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, identical in part with line 4-1, New York Bench No. 8 Placer, M.S. No. 414.
	Across swampy ground of old placer workings.
0.909	The witness cor. to cor. No. 3, No. 7 Above On Anvil Creek Placer, M.S. No. 428, identical with the witness cor. to cor. No. 4, New York Bench No. 8 Placer, M.S. No. 414, and the witness cor. to cor. No. 6, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, monumented with a limestone, 4 x 12 ins., firmly set, projecting 14 ins. above the ground, mkd. WC, 6-b8 1326, 4-414, 3-428, with an X on top.
	At the witness corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

WC T 10 S 7A R 34 W C3 MS 428 C4 C6 NYBN8 2ASG MS 414 MS 1326

1986

Reset the original stone monument inverted and alongside the alum. post and deposit broken brown glass at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NE, 1 lk. dist.

Located on old placer mining tailings.


Continue across old placer mining tailings.

2.975 Cor. No. 3, No. 8 Above or Eva L Placer, M.S. No. 1223, identical with cor. No. 5, No. 3 Above Specimen Gulch Placer, M.S. No. 1326, and cor. No. 1, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, on line 4-1, New York Bench No. 8 Placer, M.S. No. 414, monumented with a wood post, 4 ins. sq., firmly set, rotted off in the center of a mound of stone, 3 ft. base, 1 ft. high, with the remains of the wood post, 25 ins. long, mkd. 1-1326, 5/, 8/3 1223, all other markings illegible, lying alongside.

At the corner point

CHAINS

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS Drive a steel fence post, 72 ins. long, 33 ins. in the ground, SW, 1 lk. dist. Cor. is located on old placer mining tailings pile. Dependent Resurvey of A Portion of Mineral Survey No. 1223 (Restoring the 1917 survey by Irving McK. Reed) From cor. No. 3, No. 8 Above or Eva L Placer, M.S. No. 1223, identical with cor. No. 5, No. 3 Above Specimen Gulch Placer, M.S. No. 1326, and cor. No. 1, No. 2 Above Specimen Gulch Placer, M.S. No. 1326, and on line 4-1, New York Bench No. 8 Placer, M.S. No. 414, hereinbefore described. N. 60°05' W., on line 3-4, No. 8 Above or Eva L Placer, M.S. No. 1223. Across old placer mining tailings. 7.20 Anvil Creek, 8 lks. wide, 1 ft. deep., course SW; ascend steep tundra slope, among scattered willow thickets. 9.830 Cor. No. 4, No. 8 Above or Eva L Placer, M.S. No. 1223, on line 4-5, No. 7 Above On Anvil Creek Placer, M.S. No. 428, hereinbefore described. N. 38°37' E., on line 4-1, No. 8 Above or Eva L Placer, M.S. Across a rolling, southeasterly tundra slope, among scattered willow thickets. 19.591 Cor. No. 1, No. 8 Above or Eva L Placer, M.S. No. 1223, identical with cor. No. 1, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, monumented with a schist stone, 2 $1/2 \times 15$ ins., firmly set, projecting 6 ins. above ground, mkd. 8 Ab-1223 $CN^{\circ}2$ / $COR\ N^{\circ}\ 2$ on N side, $COR\ 3$ 8 on S side, with an X on top. At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone to the top of the alum. cap mkd.

T 10 S C1
R 34 W MS 385

C1
8A
MS 1223

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on a SE tundra slope among grass and willow brush. An abandoned water ditch bears W, 14 lks. dist., 5 lks. wide, 1 ft. deep, bears N. 30° E. and S. 30° W.

Dependent Resurvey of A Portion of Mineral Survey No. 385

(Restoring the 1899 survey by J.M. Davidson)

From cor. No. 1, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, identical with cor. No. 1, No. 8 Above or Eva L Placer, M.S. No. 1223, hereinbefore described.

N. $42^{\circ}38'$ E., on line 1-2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385.

Across a southeasterly, open, rolling tundra slope, among scattered thickets of willow brush.

10.339 Intersect line 1-2, Oro Grande Placer, M.S. No. 1149; not monumented.

From this point, cor. No. 1, Oro Grande Placer, M.S. No. 1149, bears S. 42°40′ E., 0.372 ch. dist., hereinafter described.

From the same point, cor. No. 2, Oro Grande Placer, M.S. No. 1149, bears N. $42^{\circ}40'$ W., 16.086 chs. dist., hereinafter described.

Thence across mineral surveys.

·	water 1. 10 b., k. 51 w., kateer kiver Meridian, Araska
CHAINS 20.385	Intersect line 3-4, Adelaide K Placer, M.S. No. 429; not monumented.
	From this point, cor. No. 3, Adelaide K Placer, M.S. No. 429, bears N. 31°45' W., 12.283 chs. dist., hereinafter described.
	From the same point, cor. No. 4, Adelaide K Placer, M.S. No. 429, bears S. 31°45' E., 0.043 ch. dist., hereinafter described.
20.617	Cor. No. 2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, identical with cor. No. 1, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, monumented with a schist stone, 4 x 16 ins., firmly set, projecting 5 ins. above the ground, mkd. 1-1221 10 Ab and S N° 8 COR, on N side, S N° 22 COR 4 on S side, with an X on top.
	from which
	The original mound of earth, 3 ft. base, 1 ft. high, bears S. 18° E., 4 lks. dist.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with alum. cap mkd.
	T 10 S R 34 W C1 C2 10A 9A MS 1221 MS 385
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	From this point, cor. No. 3, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, identical with cor. No. 4, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, and cor. No. 1, Seattle Banch Claim Placer, M.S. No. 2115, bears S. 38°25' E., 10.001 chs. dist., hereinafter described.

CHAINS

Dependent Resurvey of A Portion of Mineral Survey No. 1221

(Restoring the 1917 survey by Irving McK. Reed)

From cor. No. 1, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, identical with cor. No. 2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, hereinbefore described.

N. $60^{\circ}26'$ E., on line 1-2, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221.

Over open, rolling tundra.

19.284

Cor. No. 2, No. 10 Above Discovery On Anvil Creek Placer, identical with cor. No. 1, No. 11 Above Discovery On Anvil Creek Placer, M.S. No. 1221, monumented, in the 1984 through 1986 survey of T. 10 S., R. 33 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, encircled with a mound of stone, 3 ft. base, to the top of the alum. cap, mkd. T10S R34W C1 11A C2 10A MS 1221 1985.

The 1985 steel fence post, firmly set, projecting 36 ins. above the ground, E, 1 lk. dist.

From cor. No. 3, No. 10 Above Discovery On Anvil Creek Placer, identical to cor. No. 4, No. 11 Above Discovery On Anvil Creek Placer, M.S. No. 1221, monumented, in the 1984 through 1986 survey of T. 10 S., R. 33 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, encircled with a mound of stone, 2 ft. base, to the top of the alum. cap, mkd. T10S R34W C4 11A C3 10A MS1221 1985.

The original stone monument is firmly set alongside the alum. post.

The 1985 steel fence post, projecting 36 ins. above the ground, SE, 1 1/2 lks. dist.

S. 49°56′ W., on line 3-4, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, identical in part with line 2-1, Seattle Banch Claim Placer, M.S. No. 2115.

Across open, rolling tundra, among scattered thickets of willow brush.

Dependent Resurvey of Certain Bdvs. of Certain Mineral Surveys

	Within T. 10 S., R. 34 W., Kateel River Meridian, Alaska
CHAINS	
15.107	Cor. No. 2, Seattle Banch Claim Placer, M.S. No. 2115, monumented in the 1984 through 1986 survey of T. 10 S., R. 33 W., with an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. T10S R34W C2 SB MS2115 10A MS1221 1985.
	The original wood post, 4 ins. sq., inverted and firmly set alongside the alum. post.
19.100	Cor. No. 4, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, identical with cor. No. 1, Seattle Banch Claim Placer, M.S. No. 2115, and cor. No. 3, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, monumented with a schist stone, 3 x 14 ins., firmly set, flush to the ground, mkd. SN° 385 COR NO 3, 1-2115-SB, and 4-1221 10 Ab on side opposite, with an X on top.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.
	MS 1221 10A 9A C4 SB C3 C1 MS 385 MS 2115 1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, NW, 1 lk. dist.

> Dependent Resurvey of A Portion of Mineral Survey No. 429

(Restoring the 1900 survey by Arthur G. Blake)

From cor. No. 2, Adelaide K Placer, M.S. No. 429, monumented with a schist stone, 4×12 ins., firmly set in a rock collar, 3ins. below the tundra, mkd. 2-429, with an X on top.

The remains of the original mound of stone, 2 ft. base, alongside.

CHAINS

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.


Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 1, Adelaide K Placer, M.S. No. 429, bears S. $32^{\circ}45'$ E., 12.942 chs. dist., monumented with a schist stone, 2 x 14 ins., firmly set, projecting 17 ins. above a mound of stone, 2 ft. base, 1/2 ft. high, mkd. SN° 429 C N° 1, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

N. 46°07' E., on line 2-3, Adelaide K Placer, M.S. No. 429.

Across open, rolling tundra.

9.421 Intersect line 3-4, Oro Grande Placer, M.S. No. 1149; not monumented.

CHAINS

From this point, cor. No. 3, Oro Grande Placer, M.S. No. 1149, bears N. 34°09' W., 7.346 chs. dist., hereinafter described.

From the same point, cor. No. 4, Oro Grande Placer, M.S. No. 1149, bears S. 34°09' E., 12.239 chs. dist., hereinafter described.

10.034

Cor. No. 3, Adelaide K Placer, M.S. No. 429, monumented with a schist stone, 3 x 15 ins., firmly set, projecting 18 ins. above the ground, mkd. S N° 429, C N° 3, with an X on top.

The original mound of stone, 2 ft. base, 1 ft. high, alongside.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, to the top of the alum. cap mkd.

T 10 S R 34 W C3 AK MS 429

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

S. 31°45' E., on line 3-4, Adelaide K Placer, M.S. No. 429.

Descend gentle open, rolling tundra slope.

12.283 Intersect line 1-2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385; not monumented.

12.326

Cor. No. 4, Adelaide K Placer, M.S. No. 429, monumented with a schist stone, 2 x 20 ins., loosely set, projecting 10 ins. above the ground, mkd. S N° 3, CN° 4 on W side, and 4-429 on E side, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with alum. cap mkd.

AK 9A C4 MS 385

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, identical with cor. No. 1, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, bears N. 33°56′ E., 0.273 chs. dist., hereinbefore described.

Dependent Resurvey of A Portion of Mineral Survey No. 1149

(Restoring the 1914 survey by Irving McK. Reed)

From cor. No. 1, Oro Grande Placer, M.S. No. 1149, monumented with a wood post, 4×6 ins., firmly set, rotted off, projecting 6 ins. above the ground; there is no remaining evidence of mkd. portion of wood post. A wood post, 2×4 ins., firmly set alongside, projecting 33 ins. above ground, unmarked, with a wood lath, 5 ft. long nailed on side.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, to the top of the alum. cap mkd.

MS 1149
OG
C1
9A
MS 385

1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

НΑ		

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 1, Adelaide K Placer, M.S. No. 429, bears N. 33°00′ W., 0.297 chs. dist., hereinbefore described.

N. 42°40' W., on line 1-2, Oro Grande Placer, M.S. No. 1149.


Ascend gentle, southeasterly tundra slope.

0.372 Intersect line 1-2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, hereinbefore described.

16.458 Cor. No. 2, Oro Grande Placer, M.S. No. 1149, monumented with a wood post, 4 x 6 ins., firmly set, rotted off flush to the ground, with the remains of the wood post, 40 ins. long, mkd. 1149, all other marking illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 25 ins. in the ground, encircled by a mound of stone, $1\ 1/2$ ft. base, to the top of the alum. cap mkd.



Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

N. 29°46' E., on line 2-3, Oro Grande Placer, M.S. No. 1149.

Across open, rolling tundra.

13.410

Point for cor. No. 3, Oro Grande Placer, M.S. No. 1149, at proportionate dist.; there is no remaining evidence of the original cor. The impression of a wood post, 6 x 53 ins., is clearly visible in the tundra at this location. The original wood post, $4 \times 6 \times 53$ ins. long, mkd. OG 3 1149 was located nearby lying atop the ground in a disturbed condition.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

CHAINS	T
CHAINS	T 10 S
	R 34 W
	C3\
	OG \ MS 1149
	1986
	from which
	A caved shaft, 4 ft. sq., 5 ft. deep, bears S. 18° W., 5.97 chs. dist.
	Reset the original wood post monument inverted and alongside the alum. post.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NW, 1 lk. dist.
	S. 34°09' E., on line 3-4, Oro Grande Placer, M.S. No. 1149.
	Descend gentle, southeasterly tundra slope.
7.346	Intersect line 2-3, Adelaide K Placer, M.S. No. 429, hereinbefore described.
19.585	Cor. No. 4, Oro Grande Placer, M.S. No. 1149, monumented with a wood post, 4 x 6 ins., 38 ins. long, loosely set, in the center of and projecting 24 ins. above an earth and stone mound, 3 ft. base, 1 ft. high, mkd. OG 4-1149.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	OG /
	C4 9A MS 1149 MS 385
	1986
	Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

CHAINS

From this point, cor. No. 2, No. 9 Above Discovery On Anvil Creek Placer, M.S. No. 385, identical with cor. No. 1, No. 10 Above Discovery On Anvil Creek Placer, M.S. No. 1221, bears N. 35°00' E., 0.365 chs. dist., hereinbefore described.


Dependent Resurvey of A Portion of Mineral Survey No. 775

(Restoring the 1908 survey by Arthur G. Blake)

From cor. No. 3, Bernice No. 1 Lode claim, identical with cor. No. 5, Bernice Lode claim, M.S. No. 775, monumented with a wood post, 4 ins. sq., firmly set, rotted off flush to the ground, encircled with stone, 3 ft. base, to the top of the rotted post, with the remains of the rotted wood post, 38 ins. long, mkd. 3, and 5 on side adjacent, all other markings illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 1, Bernice No. 2 Lode claim, on line 4-5, Bernice Lode claim, M.S. No. 775 bears S. 45°33′ W., 2.710 chs. dist., monumented with a limestone, 6 ins. sq., firmly set, projecting 12 ins. above and in the center of a mound of stone, 2 ft. base, 1/2 ft. high, mkd. 1-775, with an X on top; not remonumented.

N. 47°14′ E., on line 3-4, Bernice No. 1 Lode claim, M.S. No. 775.

CHA LINE	
CHAINS	Desc. gentle, open, rolling tundra slope.
17.388	Intersect line 3-4, No. 3 Above Snow Gulch Placer, M.S. No. 715; not monumented.
	From this point, cor. No. 3, No. 3 Above Snow Gulch Placer, M.S. No. 715, bears N. 62°11' E., 3.987 chs. dist., hereinafter described.
:	From the same point, cor. No. 4, No. 3 Above Snow Gulch Placer, M.S. No. 715, bears S. 62°11' W., 5.897 chs. dist., hereinafter described.
	Thence across the mineral survey.
21.387	Intersect line 2-3, No. 3 Above Snow Gulch Placer, M.S. No. 715; not monumented.
	From this point, cor. No. 2, No. 3 Above Snow Gulch Placer, identical to cor. No. 3, No. 2 Above Snow Gulch Placer, M.S. No. 715, bears N. 34°42′ W., 19.256 chs. dist., hereinafter described.
	From the same point, cor. No. 3, No. 3 Above Snow Gulch Placer, M.S. No. 715, bears S. 34°42' E., 1.040 chs. dist., hereinafter described.
22.579	Cor. No. 4, Bernice No. 1 Lode claim, M.S. No. 775, monumented with a wood post, 4 ins. sq., firmly set, rotted off flush, in the center of a mound of stone, 2 ft. base, 1/2 ft. high, with the remains of the wood post, 28 ins. long, all markings illegible, lying alongside.
	At the corner point
	Set an alum. post 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 1 ft. base, to the top of the alum. cap mkd.
	T 10 S R 34 W
	C4
	BN1 MS 775
	1986
	Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 42 ins. in the ground, SW, 1 lk. dist.

Cor. is located on open, rolling tundra, among dense willow brush.

Dependent Resurvey of A Portion of Mineral Survey No. 715

(Restoring the 1905 survey by George M. Ashford)

From cor. No. 3, No. 3 Above Snow Gulch Placer, M.S. No. 715, monumented with a schist stone, $12 \times 14 \times 6$ ins., firmly set 6 ins. below the ground, mkd. S NO 8 COR NO 3 on N. side, and 3/715 on side opposite, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to top of alum. cap mkd.

N3ASG BN1 C3 MS 715 MS 775

1986

Reset the original stone monument inverted and alongside the alum. post.

Drive a steel fence post, 72 ins. long, 40 ins. in the ground alongside the alum. post.

From this point, cor. No. 4, Bernice No. 1 Lode claim, M.S. No. 775, bears N. 9°21'E., 1.698 chs. dist., hereinbefore described.

S. $62^{\circ}11'$ W., on line 3-4, No. 3 Above Snow Gulch Placer, M.S. No. 715.

Descend gentle, open, rolling tundra, among scattered thickets of willow brush.

3.987

Intersect line 3-4, Bernice No. 1 Lode claim, M.S. No. 775, hereinbefore described.

CHAINS

9.884

Cor. No. 4, No. 3 Above Snow Gulch Placer, M.S. No. 715, monumented by persons unknown with the remains of a wood post, 1 x 3 ins., firmly set, projecting 12 ins. above the ground, no markings legible. This position is harmoniously related with identified existing original cors. of No. 3 Above Snow Gulch Placer, and is accepted as the best available evidence of the original cor. position.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

MS 715 N3ASG C4 T 10 S

1986

R 34 W

from which

A pit, 3 x 5 x 3 ft. deep, bears S. 10° E., 22 lks. dist.

The center of a cut, 3 x 8 x 3 ft. deep, bears N. 52° W., 76 lks. dist.

Reset the remains of the wood post inverted and alongside the alum. post and deposit broken glass at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NE, 1 lk. dist.

N. $34^{\circ}54'$ W., on line 4-1, No. 3 Above Snow Gulch Placer, M.S. No. 715.

Across open, rolling tundra, among scattered thickets of willow brush.

19.936

Cor. No. 1, No. 3 Above Snow Gulch Placer, identical with cor. No. 4, No. 2 Above Snow Gulch Placer, M.S. No. 715, monumented with a granite stone, 5 x 11 x 21 ins. long, loosely set, projecting 3 ins. above the ground, mkd. SN 8 COR N°, 1-715-4, SN° 7 COR 5, with an X on top. The remains of a rotted wood post, 2 x 4 ins., lying alongside.

CHAINS	
Chans	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.
	T 10 S C4 MS 715 R 34 W C1 N3ASG
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NE, 2 lks. dist.
	Cor. is located on a northeasterly tundra slope, among scattered willow thickets.
	N. 33°11' W., on line 4-1, No. 2 Above Snow Gulch Placer, M.S. No. 715.
	Across open, rolling tundra, among scattered thickets of willow brush.
19.329	Cor. No. 1, No. 2 Above Snow Gulch Placer, identical with cor. No. 1, No. 1 On Snow Gulch Placer, M.S. No. 715, monumented with a schist stone, 5 x 14 ins., firmly set, projecting 12 ins. above the ground, mkd. 1/715 SNOW COR 1.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	N1OSG T 10 S C1 MS 715 R 34 W C1 N2ASG
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on a northeasterly tundra slope.


N. $32^{\circ}27'$ W., on line 1-2, No. 1 On Snow Gulch Placer, M.S. No. 715.

Across open, rolling tundra.

18.30 Glacier Creek, 40 lks. wide, 2 ft. deep, course N. 76° W.

20.330 Point for cor. No. 2, No. 1 On Snow Gulch Placer, M.S. No. 715, at proportionate dist., falls at location of extensive placer mining, there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

from which

The remains of a rotted wood post, set by persons unknown, 4 ins. diam., firmly set, unmarked, in a mound of stone, 3 ft. base, 1/2 ft. high, bears N. 45° W., 27 lks. dist.

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, NE, 1 lk. dist.

Cor. is located on old placer mining works.

There is no remaining evidence of cor. No. 1, Bench Claim No. 1, M.S. No. 403, destroyed by placer mining; not remonumented.

N. $60^{\circ}56'$ E., on line 2-3, No. 1 On Snow Gulch Placer, M.S. No. 715.


Across old placer mining workings.

CHAINS

9.582

Point for cor. No. 3, No. 1 On Snow Gulch Placer, identical with the point for cor. No. 2, No. 1 Above Glacier Creek Placer, M.S. No. 715, on the projection of a line through cor. No. 1, No. 1 Above Glacier Creek Placer, and cor. No. 2, No. 2 Above Snow Gulch Placer, identical with cor. No. 4, No. 1 On Snow Gulch Placer, M.S. No. 715, at record distance, falls in a location of extensive placer mining; there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SE, 1 lk. dist.

From this point, cor. No. 1, No. 1 Above Glacier Creek Placer, on line 3-4, No. 1 On Snow Gulch Placer, M.S. No. 715, bears S. 33°10′ E., 9.305 chs. dist., hereinafter described.

N. $56^{\circ}23'$ E., on line 2-3, No. 1 Above Glacier Creek Placer, M.S. No. 715.

Across old placer mining works and open, rolling tundra.

19.700

Cor. No. 3, No. 1 Above Glacier Creek Placer, identical with cor. No. 2, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715, monumented with a schist stone, $3 \times 5 \times 24$ ins. long, firmly set, projecting 18 ins. above the ground, mkd. 715-3 on W side, 2 on E side, with an X on top; no other markings visible.

The remains of the original earth mound ${\tt N}$ of cor.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

CHAINS

T 10 S R 34 W C2 C3 N2ADOGC N1AGC MS 715

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, S, 1 lk. dist.

Cor. is located on open, rolling tundra, among scattered dwarf birch.

N. 58°01' E., on line 2-3, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715.

Across open, rolling tundra.

10.085

Cor. No. 3, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715, monumented with two wood posts, 2 x 4 ins., nailed together, firmly set, rotted off flush to the ground on the S side of a mound of earth, 2 ft. base, 1 ft. high, with the remains of the wood post, 60 ins. long, mkd. MS, all other markings illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 22 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

T 10 S R 34 W C3 N2ADOGC MS 715

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.


Drive a steel fence post, 72 ins. long, 24 ins. in the ground, S, 1 lk. dist.

CHAINS	
CHAINS	Wire the original wood post to the steel fence post.
	Cor. is located in open, rolling tundra, among scattered thickets of willow brush.
	S. 34°22' E., on line 3-4, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715.
	Descend open, rolling tundra.
3.80	Abandoned water ditch, 14 lks. wide, 2 ft. deep, bears N. 62° E. and S. 62° W.
5.10	Glacier Creek, 30 lks. wide, 2 ft. deep, course S. 78° W.; ascend open, rolling tundra.
8.065	Cor. No. 4, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715, monumented with a schist stone, 4 x 9 x 18 ins. long, split in two pieces, firmly set, 1 in. below the ground, mkd. 4-715 2-A.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.
	N2ADOGC \ T 10 S
	MS 715 R 34 W
	1986
	Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 33 ins. in the ground, N, 1 lk. dist.
	Cor. is located on a northwesterly tundra slope, among scattered thickets of willow brush.
	S. 54°47' W., on line 4-1, No. 2 Above Discovery On Glacier Creek Placer, M.S. No. 715.
	Across open, rolling tundra, among scattered thickets of willow brush.

CHAINS 10.557 Cor. No. 1, No. 2 Above Discovery On Glacier Creek Placer, identical with cor. No. 4, No. 1 Above Glacier Creek Placer, M.S. No. 715, monumented with a schist stone, 5 x 16 x 28 ins. long, loosely set in a dim earth mound, 1 in. below the ground, mkd. SN° 98, COR N° 5/4-715.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.



1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on a northwesterly tundra slope, among scattered willow brush.

S. $54^{\circ}27'$ W., on line 4-1, No. 1 Above Glacier Creek Placer, M.S. No. 715.

Across open, rolling tundra, among scattered thickets of dwarf birch and willow.

19.423 Cor. No. 1, No. 1 Above Glacier Creek Placer, on line 3-4, No. 1 On Snow Gulch Placer, M.S. No. 715, monumented with a schist stone, 3 x 10 ins., firmly set, projecting 14 ins. above the ground, mkd. 1/715, with an X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

CHAINS MS 715 N1AGC

> Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on a northwesterly, open, rolling tundra slope.

From this point U.S.L.M. No. 3-B, bears S. 65°45' W., 15.98 chs. dist., monumented with a schist rock outcrop, 4×6 ft., projecting 2 ft. above ground, mkd. X, with a circle around same, and USLM N° 3B, not remonumented.

The original mound of stone, 3 ft. base, 2 ft. high, on top.

From U.S.L.M. No. 3-B, BLM electronic control station EC 8. G226, 1975, bears N. 58°35' W., 69.66 chs. dist., monumented with a copper-coated steel rod (Copperweld), 9/16 in. diam., firmly set, projecting 6 ins. above the ground, with a brass cap, 1 1/2 ins. diam., mkd. EC 8 G226 1975.

S. 33°10' E., on a portion of line 3-4, No. 1 On Snow Gulch Placer, M.S. No. 715.

Across open, rolling tundra.

Cor. No. 4, No. 1 On Snow Gulch Placer, identical with cor. No. 2, No. 2 Above Snow Gulch Placer, M.S. No. 715, monumented with a schist stone, $8 \times 13 \times 26$ ins. long, firmly set, projecting 8 ins. above a mound of stone, mkd. 2 715 4, with an

X on top.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

10.324

CHAINS

N1OSG

C4
T 10 S

C2
R 34 W

MS 715

N2ASG

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on open, rolling tundra.

S. $33^{\circ}26'$ E., on line 2-3, No. 2 Above Snow Gulch Placer, M.S. No. 715.

Across open, rolling tundra.

19.910 Cor. No. 3, No. 2 Above Snow Gulch Placer, identical with cor. No. 2, No. 3 Above Snow Gulch Placer, M.S. No. 715, monumented with a limestone, 6 ins. sq., 18 ins. long, firmly set, flush to the ground, mkd. S No 7, COR, with an X on top, all other markings illegible.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 1 ft. base, to the top of the alum. cap mkd.

N2ASG C3 T 10 S C2 R 34 W MS 715 N3ASG

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.

Cor. is located on open, rolling tundra.

	Within T. 10 S., R. 34 W., Kateel River Meridian, Alaska
CHAINS	From this point, a partially buried schist stone, 3 ft. sq., flush to the ground, bears northerly approximately 5 lks. dist.
	S. 34°42' E., on line 2-3, No. 3 Above Snow Gulch Placer, M.S. No. 715.
	Ascend gentle, open, rolling tundra, among scattered thickets of willow brush.
19.256	Intersect line 3-4, Bernice No. 1 Lode Claim, M.S. No. 775, hereinbefore described.
20.296	Cor. No. 3, No. 3 Above Snow Gulch Placer, M.S. No. 715, hereinbefore described.
	Dependent Resurvey of A Portion of Mineral Survey No. 447
	(Restoring the 1910 survey by Arthur G. Blake)
	From cor. No. 2, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, identical with cor. No. 3, No. 2 Below Discovery On Glacier Creek Placer, and cor. No. 4, No. 3 Below Discovery On Glacier Creek Placer, M.S. No. 473, monumented with a mound of stone, 2 ft. base, sunk into permafrost below tundra, with two wood posts, 2 x 4 ins., 48 ins. long, nailed together, mkd. 447, 2B-3, and 4-473-3B, lying alongside. A wood post, 4 x 6 ins., 5 ft. long, not mkd., with location can and papers attached, not legible, lying alongside. A wood post, 2 x 6 ins., 4 ft. long, not mkd., lying alongside. A wood post, 2 x 6 ins., 4 ft. long, mkd. C-473, lying alongside. A wood post, 2 x 4 ins., 42 ins. long, mkd. P.C.U. 6 S, lying alongside.
	from which original accessories

- A caved shaft, 5 x 8 ft., 4 ft. deep, bears N. 29° E., (209 ft.), 3.17 chs. dist. (Record, 190 ft.)
- A caved shaft, 15 ft. sq., 12 ft. deep, bears S. 86°47′ E., 1.89 chs. dist. (Record, N. 86°50′ E.)

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 24 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

CHAINS

MS 447
T 10 S N1BG
R 34 W C2
C4 C3
3B 2B
MS 473

1986

Deposit the original wood post monument inverted and alongside the alum. post and a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

Cor. is located on open, rolling tundra, among thickets of willow brush.

N. $8^{\circ}10'$ E., on line 2-3, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447.

Across open, rolling tundra, among scattered thickets of willow brush.

19.609

Cor. No. 3, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, monumented with two wood posts, 2 x 4 ins., nailed together, firmly set, rotted off flush to the ground, with the remains of the wood posts, 32 ins. long, mkd. 447 C3, all other markings illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with alum. cap mkd.

T 10 S R 34 W

C3 N1BG MS 447

1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.

From this point, BLM electronic control station, "EC 8 GROUP 226 1975", bears N. 34°59' W., 11.53 chs. dist., hereinbefore described.

S. 87°01' E., on line 3-4, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447.

Across open, rolling tundra.

- 4.55 Bergstrom Creek, 5 lks. wide, 1 ft. deep, course S.
- 9.861 Cor. No. 4, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, monumented with the base of a wood post, 4 ins. sq., 4 ft. long, mkd. C4 B1 447, lying beneath the tundra.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 23 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

T 10 S R 34 W

C4 N1BG MS 447

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 25 ins. in the ground, N, 1 lk. dist.

Cor. is located in open, rolling tundra.

S. 13°51' W., on line 4-1, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447.

Across open, rolling tundra, among scattered thickets of willow brush.

20.183 Intersect line 3-4, No. 2 Below Discovery On Glacier Creek Placer, M.S. No. 473.

CHAIN

From this point, cor. No. 3, No. 2 Below Discovery On Glacier Creek Placer, identical with cor. No. 4, No. 3 Below Discovery On Glacier Creek Placer, M.S. No. 473, and cor. No. 2, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, bears N. 84°53' W., 7.834 chs. dist., hereinbefore described.

From the same point, cor. No. 4, No. 2 Below Discovery On Glacier Creek Placer, identical with cor. No. 3, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473, bears S. 84°53′ E., 10.978 chs. dist., hereinafter described.

20.198

Cor. No. 1, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, monumented with a wood post, 4 ins. sq., firmly set, projecting 36 ins. above the ground, mkd. N 4 P, all other markings illegible.

The original mound of earth, 3 ft. base, 1 ft. high, bears N. 76° E., 3 lks. dist.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with alum. cap mkd.

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist.

Raise a mound of stone, 1 1/2 ft. base, 1 ft. high, SW of cor.

Dependent Resurvey of A Portion of Mineral Survey No. 473

(Restoring the 1911 survey by Arthur G. Blake)

From cor. No. 3, No. 2 Below Discovery On Glacier Creek Placer, identical with cor. No. 4, No. 3 Below Discovery On Glacier Creek Placer M.S. No. 473, and cor. 2, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, hereinbefore described.

CHAINS	
CHAINS	S. 84°53' E., on line 3-4, No. 2 Below Discovery On Glacier Creek Placer, M.S. No. 473.
	Across open, rolling tundra, among scattered thickets of willow brush.
7.834	Intersect line 4-1, No. 1 Below Bergstrom Gulch Placer, M.S. No. 447, hereinbefore described.
18.812	Cor. No. 4, No. 2 Below Discovery On Glacier Creek Placer, identical with cor. No. 3, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473, monumented with a schist stone, 3 x 12 ins., firmly set, projecting 3 ins. above ground, mkd. 3-4 473, with an X on top. A wood post, 3 x 5 ins., firmly set, N of mkd. stone, projecting 15 ins., mkd. LM COR 2, all other markings illegible.
	At the corner point
	Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8 1/2 ft. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	T 10 S R 34 W
	C4 C3 2B 1B MS 473
	1986
	Reset the original stone monument inverted and alongside the alum. rod and deposit a clear DEEP-1 magnet alongside the alum. rod as a memorial.
	Drive a steel fence post, 72 ins. long, 23 ins. in the ground, N, 1 lk. dist.
	Cor. is located in swampy, boggy tundra, among dense willow brush.
	N. 83°04' E., on line 3-4, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473.
	Across open, rolling tundra, among thickets of willow brush.

CHAINS	
18.693	Cor. No. 4, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473, monumented with a schist stone, 4 x 7 ins., firmly set in the center of a mound of stone, 3 ft. base, 1 ft. high, projecting 12 ins. above the ground, mkd. UTICA COR 2 on E side, and 4-473 on S side, with an X on top.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	T 10 S R 34 W
	C4 1B MS 473
	1986
	Deposit the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 29 ins. in the ground, N, 1 lk. dist.
	Cor. is located on a southerly tundra slope.
	S. 12°08' E., on line 4-1, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473.
	Descend southerly, open, rolling tundra slope.
1.45	Glacier Creek, 30 lks. wide, 2 ft. deep, course S. 70° W.; across placer workings and ascend northerly open, rolling tundra slope.
9.30	Approximate centerline Snake River Road, gravel, 26 lks. wide, bears N. 89° E. and N. 65° W.
9.855	Cor. No. 1, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473, monumented with a schist stone, 4 x 17 ins., firmly set, projecting 16 ins. above the ground, mkd. 1-473-1B, with an X on top.
	At the corner point

CHAINS

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 23 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

1986

Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

S. 81°56' W., on line 1-2, No. 1 Below Discovery On Glacier Creek Placer, M.S. No. 473.

Across open, rolling tundra, among scattered thickets of willow brush.

18.909

Cor. No. 2, No. 1 Below Discovery On Glacier Creek Placer, identical with cor. No. 1, No. 2 Below Discovery On Glacier Creek Placer, M.S. No. 473, monumented with a schist stone, 3 x 18 ins., firmly set, projecting 24 ins. above the ground, mkd. 1-2-B, 1-2-473, with an X on top.

The original mound of stone, 2 1/2 ft. base, 1 ft. high, bears NE, 3 lks. dist.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 25 ins. in the ground, encircled by a mound of stone, $1\ 1/2$ ft. base, to the top of the alum. cap mkd.

1986

Deposit the original stone monument inverted and alongside the alum. post and a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist.

CHAINS

Cor. is located approximately 30 lks. northerly of the Snake River Road, among dense willow brush.


Dependent Resurvey of A Portion of Mineral Survey No. 1110

(Restoring the 1913 survey by Robert J. Sommers)

From cor. No. 5, Washington Association Placer, identical with cor. No. 2, Great Eastern Association Placer, M.S. No. 1110, monumented with a wood post, 4 ins. sq., firmly set, rotted off and projecting 4 ins. above the ground, with the remains of the wood post, 36 ins. long, mkd., 5-1110-W and -1110-GE on side opposite, all other markings illegible, lying alongside.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with alum. cap mkd.



1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SE, 1 lk. dist.

S. $78^{\circ}30'$ E., on line 5-1, Washington Association Placer, M.S. No. 1110.

Across open, rolling tundra.

13.532

Intersect line 4-1, Fraction Placer, M.S. No. 704; not monumented.


From this point, cor. No. 4, Fraction Placer, identical to cor. No. 1, Mountain Placer, M.S. No. 704, bears S. 15°19' W., 29.527 chs. dist., hereinafter described.

From the same point, cor. No. 1, Fraction Placer, identical to cor. No. 4, Glacier Placer, M.S. No. 704, bears N. 15°19' E., 10.473 chs. dist., hereinafter described.

Cor. No. 1, Washington Association Placer, M.S. No. 1110, monumented with a wood post, 4 ins. sq., firmly set in the center of a mound of earth, 3 ft. base, 1 ft. high, projecting 41 ins. above the ground, mkd. 1-1110-W and 653 on side opposite, all other markings illegible. A wood post, 2 x 4 ins., wired alongside the monument.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with alum. cap mkd.



1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NW, 1 lk. dist.

Cor. is located on open, rolling tundra.

S. $16^{\circ}15'$ W., on line 1-2, Washington Association Placer, M.S. No. 1110.


Across open, rolling tundra.

75.487 Cor. No. 2, Washington Association Placer, M.S. No. 1110, monumented with a wood post, 4 ins. sq., loosely set, in a mound of earth, 3 ft. base, 1/2 ft. high, projecting 36 ins. above the ground, mkd. 2-1110-W.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.

CHAINS	
CHAINS	
	MS 1110
	WA ,
	C2/
	\searrow
	T 10 S
	R 34 W
	K 31 H
	1986
	Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	Cor. is located on the S edge of a swampy drainage, among dense willow brush.
	From this point, there is no remaining evidence of cor. No. 4, Mountain Placer, M.S. No. 704.
	N. 67°05' W., on line 2-3, Washington Association Placer, M.S. No. 1110.
	Across open, rolling tundra, with areas of swampy, boggy tundra.
20.99	Cor. No. 3, Washington Association Placer, M.S. No. 1110, identical with cor. No. 4, Boston Association Claim No. 2 Placer, M.S. No. 1857, monumented with a wood post, 4 ins. sq., loosely set, projecting 24 ins. above the ground, mkd. 4-1857, and 3-1110-W on side opposite.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with alum. cap mkd.



1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAINS

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist.


Cor. is located on open, swampy, boggy tundra.

Dependent Resurvey of A Portion of Mineral Survey No. 704

(Restoring the 1905 survey by Edw. Franklin Lewis)

From the point for cor. No. 1, Mountain Placer, identical with cor. No. 4, Fraction Placer, M.S. No. 704, at record rotated, bearing and dist. from cor. No. 1, Washington Association Placer, M.S. No. 1110, falls on open, rolling tundra; there is no remaining evidence of the original cor.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with alum. cap mkd.



1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 25 ins. in the ground, N, 1 lk. dist.

From this point, cor. No. 1, Washington Association Placer, M.S. No. 1110, bears N. 21°10′ E., 29.905 chs. dist., hereinbefore described.

N. 15°19' E., on line 4-1, Fraction Placer, M.S. No. 704.


Across open, rolling tundra.

29.527 Intersect line 5-1, Washington Association Placer, M.S. No. 1110, hereinbefore described.

40.000 Point for cor. No. 1, Fraction Placer, identical with the point for cor. No. 4, Glacier Placer, M.S. No. 704, at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, with alum. cap mkd.



1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 24 ins. in the ground, N, 1 lk. dist.

Cor. is located on open, rolling tundra.

N. 15°19' E., on line 4-1, Glacier Placer, M.S. No. 704.

Across rolling tundra, among dense willow brush.

40.000

Cor. No. 1, Glacier Placer, M.S. No. 704, monumented with a wood post, 4 ins. square, firmly set, projecting 29 ins. above the ground, mkd. COR NO 1 704.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.

From this point, a creek, 6 lks. wide, 2 ft. deep, bears N. 45° E., 31 lks. dist., course N. 33° W.

	· · · · · · · · · · · · · · · · · · ·
CHAINS	From the same point, BLM electronic control station "EC 8 G226 1975", bears N. 87°51' E., 35.99 chs. dist., hereinbefore described.
	Cor. is located on open, rolling tundra, among thickets of willow brush.
	N. 74°43' W., on line 1-2, Glacier Placer, M.S. No. 704.
	Across nearly level tundra, among thickets of willow brush.
15.55	Rock Creek, 30 lks. wide, 1 ft. deep, course S. 15° W.
25.546	Ancient cut willow stump on old cut line, 5 ins. diam., 10 ins. high, with cut marks on old branches extending from base of stump. Living willow brush growing around and alongside same.
39.00	Left bank Snake River, sand and gravel, 1 ft. high, bears S. 22° E. and N. 22° W., course SE.
40.171	Point for cor. No. 2, Glacier Placer, M.S. No.704, at the intersection of a line projected from cor. No. 1, Glacier Placer, M.S. No. 704 through ancient willow stump on cutline, hereinbefore described, and the projection of line 3-2, Mountain Placer and line 3-2, Fraction Placer, M.S. No. 704, hereinafter described. This point falls in the present Snake River, there is no remaining evidence of the original cor.; not remonumented.
	S. 15°14' W., on line 2-3, Glacier Placer, M.S. No. 704. Over Snake River.
0.30	Right bank Snake River, cut bank, 4 ft. high, covered with willow brush, bears S. 20° E. and N. 20° W., course E; across nearly level ground, covered with dense willow brush.
2.170	Point selected for the witness cor. to cor. No. 2, Glacier Placer, M.S. No. 704.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.
	WC T 10 S R 34 W C2
	/ G MS 704
	1986

CH_{L}		

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 34 ins. in the ground, N, 1 lk. dist.

Witness cor. is located on nearly level bottom land of Snake River, among dense willow brush.

Continue across nearly level ground, among dense willow brush and ascend gently across open, rolling tundra.

39.811

Cor. No. 3, Glacier Placer, identical with cor. No. 2, Fraction Placer, M.S. No. 704, monumented by persons unknown with the remains of a wood post, 2 ins. sq., 6 ins. long, sharpened to a point, firmly set, rotted off 3 ins. below the ground surface, at the locus of disturbed soil and rocks within undisturbed soil. There is no remaining evidence of the original wood post monument. This position is harmoniously related with identified existing original cors. in the area, and accepted as the best available evidence of the original cor. position.

A wood lath, $3/8 \times 2$ ins., 36 ins. long, was found lying alongside, buried beneath the tundra.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

1986

Deposit the remains of the 2 \times 2 in. wood post inverted and alongside the alum. post and a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 28 ins. in the ground, SW, 1 lk. dist.

Cor. is located in open, rolling tundra.

S. 15°14' W., on line 2-3, Fraction Placer, M.S. No. 704.

Across open, rolling tundra.

2.60 Monument Creek, 5 lks. wide, 2 ft. deep, course S. 80° E.

CHAINS	_
40.084	Point for cor. No. 3, Fraction Placer, identical with cor. No. 2, Mountain Placer, M.S. No.704, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.
	T 10 S C3 R 34 W C2 MS 704
	1986
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 32 ins. in the ground, N, 1 lk. dist.
	Cor. is located on bottomland of Snake River, among hummocky tundra and willow brush.
	S. 15°14' W., on line 2-3, Mountain Placer, M.S. No. 704.
	Across open, rolling tundra, among scattered thickets of willow brush.
24.772	Intersect line 2-3, Boston Association Claim No. 2 Placer, M.S. No. 1857.
	From this point, cor. No. 2, Boston Association Claim No. 2 Placer, M.S. No. 1857, bears N. 79°25' W., 0.083 ch. dist., hereinafter described.
33.462	Point selected for the witness cor. to cor. No. 3, Mountain Placer, M.S. No. 704.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.
	WC
	MS 704 BAC2 C3 MS 1857
	1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist.
Cor. is located on open, rolling tundra.
Right bank Snake River, 2 ft. high, bears N. 45° E. and S. 45° W., course SW.
True point for cor. No. 3, Mountain Placer, M.S. No. 704, at record bearing and dist. from cor. No. 2, Boston Association Claim No. 2 Placer, M.S. No. 1857, falls on sand and gravel bar of Snake River; there is no remaining evidence of the original cor.; not monumented due to liability of destruction by ice and water action.
There is no remaining evidence of the original witness cor. to cor. No. 3, Mountain Placer, M.S. No. 704.
From this point, cor. No. 2, Boston Association Claim No. 2 Placer, M.S. No. 1857, bears N. 14°55' E., 15.306 chs. dist., monumented with a wood post, 4 ins. sq., firmly set, projecting 18 ins. above the ground; all markings weathered beyond recognition.
At the corner point
Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with alum. cap mkd.
T 10 S R 34 W
C2 BAC2 MS 1857
1986
Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
Drive a steel fence post, 72 ins. long, 36 ins. in the ground, S, 1 1/2 lks. dist.
Cor. is located in open, rolling tundra.

CHAINS Dependent Resurvey of A Portion of Mineral Survey No. 427 (Restoring the 1909 survey by Arthur G. Blake) From cor. No. 1, Oakdale Association Placer, M.S. No. 427, monumented in the 1985-86 survey of T. 11 S., R. 34 W., with an alum. post 2 1/2 ins. diam., firmly set, flush to the ground, with alum. cap mkd. T10S R34W C1 OAPC MS 427 1985. The original steel fence post, projecting 36 ins. above the ground, bears N, 1 lk. dist. From this point, the closing cor. of secs. 6 and 31, Tps. 10 and 11 S., R. 34 W., bears S. 22°07' W., 22.870 chs. dist., monumented with an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. T10S S31 T11S S6 R34W CC MS 427 OAPC 1985. The original steel fence post, projecting 36 ins. above the ground bears N, 1 lk. dist. N. 62°51' W., on line 1-5, Oakdale Association Placer, M.S. No. 427. Descend open, rolling tundra, to Evening Gulch and ascend open, rolling tundra. 38.487 Cor. No. 5, Oakdale Association Placer, M.S. No. 427, identical to cor. No. 2, Memory Association Placer, M.S. No. 1883, hereinbefore described. GENERAL DESCRIPTION The land encompassed in this survey is located approximately 5 miles northwesterly from the City of Nome. Access is by way of Snake River Road. The township is drained by the Snake River flowing southerly through the entire township. Elevations range from approximately 50 feet to 1,800 feet above mean sea level.

There are numerous abandoned placer mining works along Anvil Creek, Glacier Creek, Boulder Creek and numerous other creeks.

The township is included within U.S. Geological Survey quadrangle maps "NOME (C-1) and (C-2)", Alaska, edited in 1950, with minor revisions in 1970 and 1973, respectively.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Charles A. Higby Surveying Technician

Kent W. Harder Surveying Technician

Paul J. Price Surveying Aid

U.S. DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ALASKA STATE OFFICE - ANCHORAGE, ALASKA

CERTIFICATE OF SURVEY

I, Michael T. Birtles, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of supplemental special instructions No. 1, dated May 14, 1984, and supplemental special instructions No. 2, dated April 1, 1985, I have dependently resurveyed portions of the north and west boundaries and a portion of the subdivisional lines, correctively dependently resurveyed a portion of the subdivisional lines, surveyed portions of the north and west boundaries, and dependently resurveyed certain boundaries of certain Mineral Surveys within Township 10 South, Range 34 West, of the Kateel River Meridian, in the State of Alaska, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 11, 1996 117, Las To

CERTIFICATE OF APPROVAL

Bureau of Land Management Anchorage, Alaska

The foregoing field notes of the survey described in the Certificate of Survey above executed by Michael T. Birtles, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

9 APRIL 1996

(Deputy State Director for Cadastral Survey, Alaska)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

THE WEST BOUNDARY

AND

A PORTION OF THE NORTH BOUNDARY

AND

THE SURVEY OF

A PORTION OF THE NORTH BOUNDARY

AND

THE DEPENDENT RESURVEY OF

CERTAIN BOUNDARIES OF CERTAIN MINERAL SURVEYS

WITHIN

TOWNSHIP 10 SOUTH, RANGE 35 WEST

OF THE KATEEL RIVER MERIDIAN IN THE STATE OF ALASKA

EXECUTED BY

Michael T. Birtles, Cadastral Surveyor

Under supplemental special instructions No. 2, dated April 1, 1985, approved May 10, 1985, which provided for the surveys included under Group Number 226, and assignment instructions dated May 16, 1985.

Survey commenced: May 27, 1986

Survey completed: October 2, 1986

INDEX

	Township 10 South , Range 35 West	
	Kateel River Meridian, Alaska	
	B 1.15	PAGES
	Dependent Resurvey of the West Boundary	2-7
	Dependent Resurvey and Survey of the North Boundary	7-10
<u> </u>	DEPENDENT RESURVEY OF MINERAL SURVEYS	
M.S. No.	CLAIM NAME	PAGES
482	Discovery and Cold Air Bench Group Placer	10, 12-13
1188	No. 1 Below Discovery on Sunset Creek Placer	12-13
1291	No. 1 Above Discovery Placer on Sunset Creek	10-12
1308	Wayno Association Placer	16-17
1332	C Association Placer	4 -6, 17-19,
	E Association Placer G Association Placer	21-23, 25 5, 6, 17, 19-21 5, 23-25
1381	Canby Association Claim Placer	13-17
1883	Memory Association Placer	12-13

TOWNSHIP 10 SOUTH, RANGE 35 WEST KATEEL RIVER MERIDIAN, ALASKA

CHAIN

The following field notes describe the dependent resurvey of the west boundary and a portion of the north boundary, the survey of a portion of the north boundary, and the dependent resurvey of certain boundaries of certain mineral surveys within Township 10 South, Range 35 West, Kateel River Meridian, Alaska.

The following Mineral Surveys were surveyed by the following U.S. Deputy Mineral Surveyors, U.S. Mineral Surveyors or Mineral Surveyors on the respective dates:

Mineral Survey No. 427, Arthur G. Blake, 1909
Mineral Survey No. 482, Daniel A. Jones, 1911
Mineral Survey No. 1188, Irving McK. Reed, 1915
Mineral Survey No. 1291, Irving McK. Reed, 1920
Mineral Survey No. 1292, Irving McK. Reed, 1920
Mineral Survey No. 1308, Arthur G. Blake, 1921
Mineral Survey No. 1313, Arthur G. Blake, 1921
Mineral Survey No. 1320, Arthur G. Blake, 1921
Mineral Survey No. 1332, Arthur G. Blake, 1922
Mineral Survey No. 1381, Daniel A. Jones, 1923
Mineral Survey No. 1832, Arthur G. Blake, 1925
Mineral Survey No. 1866, Arthur G. Blake, 1928
Mineral Survey No. 1883, Arthur G. Blake, 1935

A portion of the subdivisional lines were surveyed by Maurice P. Oswald and Richard K. DeCamp for the firm Dickinson, Oswald, Walch, and Lee Engineers, in 1975.

A plat of Township 10 South, Range 35 West, Kateel River Meridian, Alaska, as prepared under Special Instructions dated December 31, 1974, for Group No. 226, Alaska, was approved February 18, 1981, and suspended on March 11, 1982. The suspension will be revoked upon approval of this survey.

A portion of the east boundary of Township 10 South, Range 35 West, Kateel River Meridian, Alaska, was surveyed by Michael T. Birtles, Cadastral Surveyor, in 1986.

A portion of the east boundary of Township 10 South, Range 35 West, Kateel River Meridian, Alaska, was dependently resurveyed by Michael T. Birtles, Cadastral Surveyor, in 1986.

A portion of Mineral Survey No. 1883, was dependently resurveyed in the survey of Township 10 South, Range 34 West, by Michael T. Birtles, Cadastral Surveyor, in 1986.

The south boundary of Township 10 South, Range 35 West, Kateel River Meridian, Alaska, was dependently resurveyed by Michael D. Wilson, Cadastral Surveyor, in 1986.

Mineral Survey No. 482 and portions of Mineral Survey Nos. 1188, 1291, 1292, 1320, 1832 and 1883 were dependently resurveyed in the survey of Townships 11 South, Ranges 34 and 35 West, by Michael D. Wilson, Cadastral Surveyor in 1986.

TOWNSHIP 10 SOUTH, RANGE 35 WEST KATEEL RIVER MERIDIAN, ALASKA

CHAINS

This survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions</u>, <u>1973</u>, and supplemental special instructions No. 2 dated April 1, 1985, for Group No. 226, Alaska.

Preliminary to the resurvey, the lines of the original survey were retraced and a search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of lines refer to the true meridian as determined by direct observations of the sun, projected by fore and backsights.

The geographic position of the corner of Townships 10 and 11 South, Ranges 34 and 35 West, as determined by a tie to U.S. Coast and Geodetic Survey triangulation station "ANVIL USE", is:

Latitude 64°34'18.57" N., Longitude 165°33'53.94" W.
NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map, "NOME (C-2)", Alaska, 1950 edition, with minor revisions in 1973, and indicates a mean value of $16\ 1/2^\circ$ East.

The term COPPERWELD as used in these field notes is a brand-name for a copper coated steel rod with a brass cap which may be authorized for use in monumentation of corners in certain areas where the use of a regulation iron post is not practical.

Dependent Resurvey of the W. Bdy. of T. 10 S., R. 35 W., Kateel River Meridian, Alaska

Beginning at the cor. of Tps. 10 and 11 S., Rs. 35 and 36 W., monumented with an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. T10S T11S R35W R36W S1 S6 S31 S36 1986.

The original steel fence post, firmly set, projecting 36 ins. above the ground, bears N, 1 lk. dist.

North, bet. secs. 31 and 36.

Ascend moderately steep, open, rolling tundra slope.

48.75

End ascent; continue across open, rolling tundra, among scattered rock outcrops.

CHAINS	
80.00	Point for the cor. of secs. 25, 30, 31 and 36; not monumented.
	Land, open, rolling tundra.
	Soil, decomposed schist rock.
	Vegetation, tundra vegetation and scattered grasses.
	North bot some 25 and 20
	North, bet. secs. 25 and 30.
	Across open, rolling tundra, among scattered rock outcrops.
80.00	Point for the cor. of secs. 19, 24, 25 and 30.
	Set an alum post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, encircled by a mound of stone, 4 ft. base, to the top of the alum. cap mkd.
	T 10 S
	R 36 W R 35 W
	<u>S 24 S 19</u> S 25 S 30
	1006
	1986
	from which
	A schist stone, 28 x 60 ins., projecting 3 ins. above the ground, bears N. 41° E., 9 lks. dist., mkd. B X O.
	A schist stone, 30 x 48 ins., projecting 8 ins.
	above the ground, bears S. 15° W., 35 lks. dist., mkd. B X O.
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 29 ins. in the ground, S, 1 lk. dist.
	Land, open, rolling tundra.
	Soil, decomposed schist rock.
	Vegetation, tundra vegetation with scattered grasses.
	North, bet. secs. 19 and 24.
	Across open, rolling tundra.
80.00	Point for the cor. of secs. 13, 18, 19 and 24; not monumented.

CHAINS Land, open, rolling tundra. Soil, decomposed schist rock. Vegetation, tundra vegetation with scattered grasses. North, bet. secs. 13 and 18. Descend open, rolling tundra, through scattered willow thickets. 64.35 Intersect line 8-1, C Association Placer, M.S. No. 1332; point for the closing cor. of secs. 13 and 18. Set an alum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd. MS 1332 CA S 13 S 18 R 36 W R 35 W T 10 S 1986 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 38 ins. in the ground, S, 1 lk. dist. From this point, cor. No. 8, C Association Placer, M.S. No. 1332, bears S. 68°55' E., 9.826 chs. dist., hereinafter described. From this same point, cor. No. 1, C Association Placer, M.S. No. 1332, bears N. 68°55' W., 13.769 chs. dist., hereinafter described. Thence across the mineral survey. 71.03 Intersect line 5-6, C Association Placer, M.S. No. 1332; point for the closing cor. of secs. 13 and 18.

Set an alum post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of

the alum. cap mkd.

CHAINS	
Опапо	T 10 S
	R 36 W R 35 W
	S 13 S 18
	CA
	MS 1332
	1986
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 34 ins. in the ground, N, 1 lk. dist.
:	From this point, cor. No. 5, C Association Placer, M.S. No. 1332, bears N. 61°19' W., 2.489 chs. dist., hereinafter described.
	From this same point, cor. No. 6, C Association Placer, identical with cor. No. 1, G Association Placer, M.S. No. 1332, bears S. 61°19' E., 38.678 chs. dist., hereinafter described.
73.14	Intersect line 4-5, C Association Placer, M.S. No. 1332; point for the closing cor. of secs. 13 and 18.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.
	MS 1332
	CA
	S 13 S 18
	R 36 W R 35 W
	CC T 10 S
	1986
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, S, 1 lk. dist.
:	From this point, cor. No. 4, C Association Placer, on line 1-2, E Association Placer, M.S. No. 1332, bears N. 67°07' E., 4.300 chs. dist., hereinafter described.
	From the same point, cor. No. 5, C Association Placer, M.S. No. 1332, bears S. 67°07' W., 2.370 chs. dist., hereinafter described.

CHAINS Thence across the mineral survey. 79.05 Intersect line 2-3, C Association Placer, M.S. No. 1332; point for the closing cor. of secs. 13 and 18. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd. T 10 S CC R 36 W | R 35 W S 13 | S 18 MS 1332 1986 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 42 ins. in the ground, N, 3 lks. dist. From this point, cor. No. 2, C Association Placer, M.S. No. 1332, bears S. 77°11' W., 13.600 chs. dist., hereinafter described. From the same point, cor. No. 3, C Association Placer, identical with cor. No. 2, E Association Placer, M.S. No. 1332, bears N. 77°11' E., 2.468 chs. dist., hereinafter described. 80.00 Point for the cor. of secs. 7, 12, 13 and 18. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd. T 10 S R 36 W, R 35 W S 12 S 7 S 13 | S 18 1986 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 25 ins. in the ground, E, 1 lk. dist.

CHAINS	Land, open, rolling tundra.
	Soil, decomposed tundra vegetation and alluvial gravels.
	Vegetation, tundra vegetation and scattered grasses.
<u> </u>	
	North, bet. secs. 7 and 12.
	Ascend moderate, open, rolling tundra.
ĺ	
62.40	End ascent, continue across open, rolling tundra.
80.00	Point for the cor. of secs. 1, 6, 7 and 12; not monumented.
	Land, open, rolling tundra.
	Soil, decomposed schist rock.
	Vegetation, tundra vegetation with scattered willow brush.
	North, bet. secs. 1 and 6.
	Across open, rolling tundra.
80.00	Point for the cor. of Tps. 9 and 10 S., Rs. 35 and 36 W.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in
	the ground, encircled by a mound of stone, 2 ft. base, to the
	top of the alum. cap mkd.
	m o a
	T 9 S
	R 36 W R 35 W
	<u>S 36 S 31</u>
	SIIS6
	T 10 S
	1006
	1986
	Donogit a gloom DEED 1 moment of the bare of the all was
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a
	memorial.
	Drive a steel fence post, 72 ins. long, 30 ins. in the ground,
	N, 1 lk. dist.
	N, I IX. GISC.
	A Portion of the N. Bdy. of T. 10 S., R. 35 W.
	Kateel River Meridian, Alaska
	From the cor of The Q and 10 0 Da 34 3 25 77 3 7
	From the cor. of Tps. 9 and 10 S., Rs. 34 and 35 W., monumented
	with an alum. post, 2 1/2 ins. diam., firmly set, projecting 3
	ins. above the ground, encircled by a mound of stone, 3 ft.
	base, 12 ins. high, with alum. cap mkd. T9S T10S R34W R35W S1 S6
	S31 S36 1986.

A Portion of the N. Bdy. of T. 10 S., R. 35 W. Kateel River Meridian, Alaska

	kateel River Meridian, Alaska
CHAINS	from which the original bearing objects
	A schist stone, 30 x 36 ins., projecting 4 ins. above the ground, bears North, 26 lks. dist., mkd. B X O.
	A schist stone, 26 x 31 ins., projecting 4 ins. above the ground, bears S. 11° E., 8 lks. dist., mkd. B X O.
	The original steel fence post bears N, 1 lk. dist., projecting 35 ins. above the ground.
	West, bet. secs. 1 and 36.
	Across rolling, mountainous tundra.
80.00	Point for the cor. of secs. 1, 2, 35 and 36.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, encircled by a mound of stone, 4 ft. base, to the top of the alum. cap mkd.
	T 9 S R 35 W S 35 S 36 S 2 S 1 T 10 S
	1986
	from which
:	A schist stone, 6 x 24 ins., firmly set, projecting 12 ins., bears N. 77° E., 58 lks. dist., mkd. B X O.
	A schist stone, 18 x 30 ins., firmly set, projecting 4 ins., bears N. 53° W., 46 lks. dist., mkd. B X O.
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 33 ins. in the ground, S, 1 lk. dist.
	Land, rolling, mountainous tundra. Soil, decomposed schist rock. Vegetation, tundra vegetation.
	West, bet. secs. 2 and 35.

Descend steep, mountainous tundra slope.

A Portion of the N. Bdy. of T. 10 S., R. 35 W. Kateel River Meridian, Alaska

COLLA DAG	
CHAINS 48.95	Penny River, 30 lks. wide, course SW; ascend steep, mountainous tundra slope.
80.00	Point for the cor. of secs. 2, 3, 34 and 35; not monumented.
	Land, rolling mountainous tundra. Soil, decomposed schist rock. Vegetation, tundra vegetation.
	West, bet. secs. 3 and 34.
	Ascend steep, mountainous tundra slope.
05.45	
26.45	Top of ridge bears NE and SW; descend moderate, open, rolling tundra, among scattered willow brush.
80.00	Point for the cor. of secs. 3, 4, 33 and 34.
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.
	T 9 S R 35 W S 33 S 34 S 4 S 3 T 10 S
	1986
	Raise a mound of earth and sod, 4 ft. base, 2 ft. high, N of cor.
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 26 ins. in the ground, S, 1 lk. dist.
	S, 1 lk. dist.
	S, 1 lk. dist. Dig pits, 12 x 18 x 12 ins., E and W of alum. post, 3 ft. dist. Land, open, rolling tundra. Soil, decomposed tundra and loam. Vegetation, tundra vegetation and thick willow brush.
	S, 1 lk. dist. Dig pits, 12 x 18 x 12 ins., E and W of alum. post, 3 ft. dist. Land, open, rolling tundra. Soil, decomposed tundra and loam. Vegetation, tundra vegetation and thick willow brush. West, bet. secs. 4 and 33.
	S, 1 lk. dist. Dig pits, 12 x 18 x 12 ins., E and W of alum. post, 3 ft. dist. Land, open, rolling tundra. Soil, decomposed tundra and loam. Vegetation, tundra vegetation and thick willow brush. West, bet. secs. 4 and 33. Across open, rolling tundra.
80.00	S, 1 lk. dist. Dig pits, 12 x 18 x 12 ins., E and W of alum. post, 3 ft. dist. Land, open, rolling tundra. Soil, decomposed tundra and loam. Vegetation, tundra vegetation and thick willow brush. West, bet. secs. 4 and 33.

A Portion of the N. Bdy. of T. 10 S., R. 35 W. Kateel River Meridian, Alaska

CHAINS	The original mound of stone, 3 ft. base, 2 ft. high, bears W, 4 lks. dist.
	Dependent Resurvey of A Portion of the N. Bdy. of T. 10 S., R. 35 W., Kateel River Meridian, Alaska
	From the point for the cor. of secs. 4, 5 32 and 33; hereinbefore described.
	West, bet. secs. 5 and 32.
	Across open, rolling tundra.
70.20	Nome-Teller Road, gravel, 45 lks. wide, bears S. 12° E. and N. 12° W.
80.00	Point for the cor. of secs. 5, 6, 31 and 32; not monumented.
	Land, open, rolling tundra.
	Soil, decomposed schist rock. Vegetation, tundra vegetation and scattered grasses.
	West, bet. secs. 6 and 31.
	Across open, rolling tundra.
75.46	The cor. of Tps. 9 and 10 S., Rs. 35 and 36 W., hereinbefore described.
	Dependent Resurvey of Certain Bdys. of Certain Mineral Surveys Within T. 10 S., R. 35 W., Kateel River Meridian, Alaska
	Dependent Resurvey of A Portion of Mineral Survey No. 1291
	(Restoring the 1920 survey by Irving McK. Reed)
	From cor. No. 2, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291, identical with cor. No. 5, Discovery and Cold Air Bench Group Placer, M.S. No. 482, monumented in the 1986 survey of T. 11 S., R. 35 W., with an alum. post, 2 1/2 ins. diam., firmly set, flush to the ground, with alum. cap mkd. T10S R35W MS 1291 N1ADPOSC C2 MS 482 DACABG C5 1986.
	The original steel fence post, firmly set, projecting 36 ins. above the ground, bears N, 1 lk. dist.

N. 31°24' W., on line 2-3, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291.

Across open, rolling tundra.

18.462 Cor. No. 3, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291, monumented with a wood post, 4 ins. sq., firmly set in the center of a mound of stone, 2 ft. base, 1 ft. high,

projecting 42 ins., mkd. 3-1291-1Ab.

At the corner point

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd.

T 10 S N1ADPOSC R 35 W C3 MS 1291

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 30 ins. in the ground, NE, 1 1/2 lks. dist.

N. 57°28' E., on line 3-4, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291.

Across open, rolling tundra.

10.770

Cor. No. 4, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291, monumented with a limestone, 6 x 12 ins., firmly set, projecting 9 ins. above the ground, mkd. 4-1291-1 Ab, with X on top.

An iron rebar, 1/2 in. diam., firmly set, in the center of and projecting 3 ins. above a mound of earth, 3 ft. base, 2 ft. high, bears N. 60° E., 4 lks. dist.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 1/2 ft. base, to the top of the alum. cap mkd.

CHAINS T 10 S R 35 W N1ADPOSC MS 1291 1986 Reset the original stone monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 33 ins. in the ground, SW, 1 lk. dist. S. 25°48' E., on line 4-1, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291. Across open, rolling tundra. 18.185 Cor. No. 1, No. 1 Above Discovery Placer on Sunset Creek, M.S. No. 1291, identical with cor. No. 6, Discovery and Cold Air Bench Group Placer, M.S. No. 482, monumented in the 1986 survey of T. 11 S., R. 35 W., with an alum. post, 2 1/2 ins. diam., firmly set, flush to the top of a mound of earth, 3 ft. base, 1 ft. high, with alum. cap mkd. T10S R35W MS1291 N1ADPOSC C1 MS482 DACABG C6 1986. The original wood post, 4 ins. sq., is firmly set alongside the alum. post, projecting 20 ins., mkd. 6 482 DCA and 1 1291 1Ab. Dependent Resurvey of A Portion of Mineral Survey No. 1883 (Restoring the 1935 survey by Arthur G. Blake) From cor. No. 5, Memory Association Placer, M.S. No. 1883, identical with cor. No. 3, No. One Below on Sunset Creek Placer, M.S. No. 1832, cor. No. 1, Discovery and Cold Air Bench Group Placer, M.S. No. 482, with cor. No. 5, No. 1 Below Discovery on Sunset Creek Placer, M.S. No. 1188, monumented in the 1986 survey of T. 11 S., R. 35 W., with a steel spike, 3/8 in. diam., firmly set 4 ins. below the gravel surface of the Nome Teller Road, from which the original 1986 reference monuments

CHAINS

An alum. post, 2 1/2 ins. diam., firmly set, flush to the ground, with alum. cap mkd. RM 139 LKS T10S R35W C1 DACABG MS 482 C5 MAPMC MS 1883 C3 NOBOSCP MS 1832 C5 N1BDOSC MS1188 1986, and arrow pointing to the cor.; the original steel fence post, firmly set, projecting 36 ins. above the ground, bears N, 1 lk. dist. from the reference monument; a 6 x 6 in. concrete post, firmly set, projecting 16 ins. above the ground, firmly set along E side of alum. post.

An alum. post, 2 1/2 ins. diam., firmly set, flush to the ground, with alum. cap mkd. RM 189 LKS T10S R35W C1 DACABG MS482 C5 MAPMC MS 1883 C3 NOBOSCP MS1832 C5 N1BDOSC MS1188 1986, and arrow pointing to the cor.; the original steel fence post, firmly set, projecting 36 ins. above the ground, bears N, 1 lk. dist.

N. $32^{\circ}20'$ E., on line 5-6, Memory Association Placer, M.S. No. 1883.

Across open, rolling tundra.

29.156

Cor. No. 6, Memory Association Placer, M.S. No. 1883, monumented in the 1986 survey of T. 10 S., R. 34 W., with an alum. post, 2 1/2 ins. diam., firmly set, encircled with a collar of stone, 2 ft. diam., to the top of the alum. cap mkd. T10S R35W C6 MAPMC MS 1883 1986.

The original wood post monument is inverted and firmly set alongside the alum. post.

The original steel fence post, firmly set, projecting 40 ins. above the ground, bears NE, 1 $lk.\ dist.$

Dependent Resurvey of A Portion of Mineral Survey No. 1381

(Restoring the 1923 survey by Daniel A. Jones)

From cor. No. 2, Canby Association Claim Placer, M.S. No. 1381, monumented with a wood post, 4 ins. sq., firmly set, rotted off flush to the ground, with the remains of the wood post, 33 ins. long, mkd. 2/1381 C, lying alongside; there is no remaining evidence of the original earth mound.

At the corner point

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.

CHAINS	T 10 S
	R 35 W C 2
	MS 1381
	1986
	Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	N. 2°24' E., on line 2-3, Canby Association Claim Placer, M.S. No. 1381.
	Across open, rolling tundra.
24.636	The closing cor. of secs. 22 and 27, on line 2-3, Canby Association Claim Placer, M.S. No. 1381, monumented with a copper-coated steel rod (Copperweld), 9/16 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap, 1 1/2 ins. diam., mkd. CC T10S R35W S22 S27 MS1381 1975.
45.616	Cor. No. 3, Canby Association Claim Placer, M.S. No. 1381, monumented with a wood post, 4 ins. sq., firmly set and rotted off in the remains of the original earth mound, with the remains of the original wood post, 40 ins. long, mkd. 3/1381/C, lying alongside.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, encircled by a mound of stone, 2 ft. base, 1/2 ft. high, with alum. cap mkd.
	T 10 S R 35 W
	CAC
	MS 1381
	1986
	Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

_	
CHAINS	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	S. 73°44' E., on line 3-4, Canby Association Claim Placer, M.S. No. 1381.
	Descend slope to bottomland of Penny River.
2.05	Penny River, 68 lks. wide, 2 ft. deep, course S. 20° W.; across braided bottomland of Penny River, through willow brush.
4.10	Penny River, 53 lks. wide, 1 ft. deep, course S. 14° W.
9.70	Honey Creek, 45 lks. wide, 2 ft. deep, course S. 24° W.
17.429	Cor. No. 4, Canby Association Claim Placer, M.S. No. 1381, monumented with a wood post, 4 ins. sq., firmly set and rotted off in the center of the original earth mound, 3 ft. base, 1 ft. high, with the remains of the original wood post, 28 ins. long, mkd. 4/1381/C, lying alongside.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, encircled by a mound of stone, 4 1/2 ft. base, 1 ft. high, with alum. cap mkd.
	T 10 S R 35 W CA CAC MS 1381
	1986
	Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.
	Drive a steel fence post, 72 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	S. 4°07' W., on line 4-5 of Canby Association Claim Placer, M.S. No. 1381.
	Across open, rolling tundra, through thick willow brush.
16.120	The closing cor. of secs. 22 and 27, on line 4-5, Canby Association Claim Placer, M.S. No. 1381, monumented with a copper-coated steel rod (Copperweld), 9/16 in. diam., firmly set, projecting 11 ins. above the ground, with brass cap, 1 1/2
	ins. diam., mkd. T10S R35W S22 S27 CC MS1381 1975.

CHAINS	
41.092	Cor. No. 5, Canby Association Claim Placer, M.S. No. 1381, monumented with a wood post, 4 ins. sq., firmly set, rotted off flush to the ground, on the south side of the original mound of earth, 3 ft. base, 1 1/2 ft. high, with the remains of the original wood post, 38 ins. long, mkd. 5/1381 CANBY, lying alongside.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.
	CAC C5 T 10 S MS 1381 R 35 W
	Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a rusted shovel head and a clear DEEP-1 magnet at the base of the alum. post as memorials.
	Raise a mound of stone, 3 ft. base, 1 ft. high, NE of cor.
	Drive a steel fence post, 70 ins. long, 36 ins. in the ground, N, 1 lk. dist.
	S. 26°56' W., on line 5-6, Canby Association Claim Placer, M.S. No. 1381.
	Across open, rolling tundra, through thick willow brush.
5.40	Abandoned ditch, 20 lks. wide, 2 ft. deep, bears S. 22° E. and N. 22° W.
32.521	Cor. No. 6, Canby Association Claim Placer, M.S. No. 1381, identical with cor. No. 7, Wayno Association Placer, M.S. No. 1308, monumented with a wood post, 4 x 6 ins., firmly set, rotted off flush with the ground, with the remains of the wood post, 18 ins. long, mkd. CANBY 6/1381, 7W on side opposite, 1308 on side adjacent.
	At the corner point
	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.

CHAINS

MS 1381

CAC

C 6

T 10 S

C 7

R 35 W

MA

MS 1308

1986

Reset the remains of the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 39 ins. in the ground, N, 1 lk. dist.

Dependent Resurvey of A Portion of Mineral Survey No. 1332

(Restoring the 1922 survey by Arthur G. Blake)

From cor. No. 8, C Association Placer, M.S. No. 1332, monumented with a schist stone, firmly set, 20×26 ins., projecting 10 ins. above ground, mkd. 8C with X on top, no other markings legible.

At the corner point

Cement a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in a drill hole, 3/4 in. diam., 3 1/2 ins. deep, mkd.

MS 1332 CA C8 T 10 S R 35 W

1986

Drive a steel fence post, 72 ins. long, 12 ins. in the ground to bedrock, NW, 2 lks. dist.

Cor. is located on a prominent schist rock outcrop ridge, 30 ft. high, bearing N. 26° E. and S. 26° W.

From this point, cor. No. 1, E Association Placer, M.S. No. 1332, bears N. 20°59' W., 12.26 chs. dist., hereinafter described.

N. 68°55′ W., on line 8-1, C Association Placer, M.S. No. 1332.

Across open, rolling tundra. 9.826 The closing cor. of secs. 13 and 18, hereinbefore described. 23.595 Point for cor. No. 1, C Association Placer, M.S. No. 1332 at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd. MS 1332 T 10 S \ CA R 36 W C1 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 30 ins. in the ground, N, 1 lk. dist. From this point, there is no remaining evidence of U.S.L.M. No. 1332, removed by persons unknown. N. 3°31' W., on line 1-2, C Association Placer, M.S. No. 1332. Across open, rolling tundra. 2.40 Arctic Creek, 48 lks. wide, 1 ft. deep, course S. 75° W. 6.732 Point for cor. No. 2, C Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, encircled by a mound of stone, 3 ft. base, to the top of the alum. cap mkd. T 10 S R 36 W \C2 1986 Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

CHAIN

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, S, 1 lk. dist.

From this point, two location wood posts, 2 x 2 ins., with rusted tin cans attached, loosely set, projecting 21 ins. above the ground, not mkd., bear S. $6^{\circ}23'$ E., 36 lks. dist., on the E side of an earth mound, 3 ft. base, 1 ft. high.

N. 77°11' E., on line 2-3, C Association Placer, M.S. No. 1332.

Across open, rolling tundra.

13.600 The closing cor. of secs. 13 and 18, hereinbefore described.

Point for cor. No. 3, C Association Placer, identical with cor. No. 2, E Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, encircled by a mound of stone, 2 ft. base, 1/2 ft. high, with alum. cap mkd.

T 10 S R 35 W C2 C3 EA MS 1332

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post 72 ins. long, 36 ins. in the ground, SW, 1 lk. dist.

N. 57°37' E., on line 2-3, E Association Placer, M.S. No. 1332.

Across open, rolling tundra.

65.485

Point for cor. No. 3, E Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, encircled by a mound of stone, 2 ft. base, 1/2 ft. high with alum. cap mkd.

CHAINS	T 10 S R 35 W			
	C3			
1	EA MS 1332			
	1986			
	Deposit a 5/8 in. alum. rod point, a 5/8 in. bolt, and a steel			
	spike beneath the alum. post as a memorial.			
	Drive a steel fence post, 72 ins. long, 35 ins. in the ground, SE, 1 1/2 lks. dist.			
;	S. 31°05' E., on line 3-4, E Association Placer, M.S. No. 1332.			
	Across open, rolling tundra, through scattered willow brush.			
2.00	Arctic Creek, 30 lks. wide, 1 ft. deep, course S. 25° W.			
9.000	Point for cor. No. 4, E Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.			
:	Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 1 1/2 ft. base, to the top of the alum. cap mkd.			
	MS 1332 T 10 S EA C4 R 35 W			
	1986			
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.			
	Drive a steel fence post. 72 ins. long, 36 ins. in the ground, NW, 1 lk. dist.			
	from this point, the original improvements			
	The S end of the remains of a cut, 3 x 50 x 3 ft. deep, bears S. 57° E., 260 ft. dist., long side extends N. 18° W. (Record S. 56°38' W., 257 ft.)			
	The S end of the remains of a cut, 2 x 40 x 2 ft. deep, bears S. 57 3/4° W., 300 ft. dist., long side extends N. 34° W. (Record S. 57°21' W., 296 ft.)			
	i			

CHAINS The S end of the remains of a cut, $3 \times 50 \times 3$ ft. deep, bears N. 84 3/4° W., 406 ft. dist., long side extends West. (Record N. 84°30' W., 405 ft.) S. 58°55' W., on line 4-1, E Association Placer, M.S. No. 1332. Across open, rolling tundra, through scattered willow brush. 67.220 Cor. No. 1, E Association Placer, M.S. No. 1332, monumented with a hole, 3 x 5 x 6 ins. deep, in the center of a mound of earth, 4 ft. base, 2 ft. high, with a wood post, $3 \times 5 \times 20$ ins. long, square on one end and sharp on opposite end, lying alongside, no markings legible. At the corner point Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the earth mound, with alum. cap mkd. MS 1332 EΑ T 10 S R 35 W 1986 Reset the wood post inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 44 ins. in the ground, NE, 1 lk. dist. N. 17°50' W., on a portion of line 1-2, E Association Placer, M.S. No. 1332. Across open, rolling tundra, through scattered willow brush. 2.694 Point for cor. No. 4, C Association Placer, M.S. No. 1332, at rotated record bearing and record dist., there is no remaining evidence of the original cor. monument. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.

CHAINS			
Спицю	CA EA MS 1332		
	C4 MS 1332		
	T 10 S		
	1986		
	Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 29 ins. in the ground, SE, 1 lk. dist.		
	from this point, the original improvements The N end of the remains of a cut, 3 x 40 x 3 ft. deep, bears N. 71 3/4° E., 180 ft. dist., long side extends S. 20° E. (Record N. 71° E., 181 ft.)		
	The N end of the remains of a cut, 2 x 65 x 1 ft. deep, bears N. 72 1/2° E., 168 ft. dist., long side extends S. 13° E. (Record N. 71° E., 169 ft.)		
	The N end of the remains of a cut, 3 x 44 x 2 ft. deep, bears N. 73° E., 157 ft. dist., long side extends S. 20° E. (Record N. 72° E., 156 ft.)		
	The N end of the remains of a cut, 2 x 36 x 3 ft. deep, bears S. 89 3/4° E., 106 ft. dist., long side extends S. 10° W. (Record N. 78° E., 104 ft.)		
	The W end of the remains of a cut, 3 x 50 x 1 ft. deep, bears N 30 1/2° W., 240 ft. dist., long side extends N. 10° E. (Record N. 30°30′ W., 244 ft.)		
	The W end of the remains of a cut, 3 x 35 x 1/2 ft. deep, bears N. 24 3/4° W., 198 ft. dist., long side extends N. 22° E. (Record N. 27°30′ W., 200 ft.).		
	S. 67°07' W., on line 4-5, C Association Placer, M.S. No. 1332.		
	Across open, rolling tundra.		
4.300	The closing cor. of secs. 13 and 18, hereinbefore described.		
6.670	Point for cor. No. 5, C Association Placer, M.S. No. 1332, at rotated record bearing and record dist., there is no remaining evidence of the original cor. monument.		
	•		

CHAINS Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in

the ground, with alum. cap mkd.

MS 1332 C5 T 10 S CA R 36 W

1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, SE, 1 lk. dist.

from this point, an original improvement


The S end of the remains of a cut, 3 x 60 x 2 ft. deep, bears S. 89° W., 93 ft. dist., long side extends N. 51° W. (Record S. 86° W., 95 ft.)

S. 61°19′ E., on line 5-6, C Association Placer, M.S. No. 1332.

Across open, rolling tundra.

- 0.35 Old wagon trail, 13 lks. wide, bears E and W.
- 2.489 The closing cor. of secs. 13 and 18, hereinbefore described.
- Point for cor. No. 6, C Association Placer, identical with cor. No. 1, G Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.

Set an alum. post, 30 ins. long, $2\ 1/2$ ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



1986

from which

The remains of a ruined cast iron stove, bears W, 1.30 chs. dist.

Dependent Resurvey of Certain Bdys. of Certain Mineral Surveys Within T. 10 S., R. 35 W., Kateel River Meridian, Alaska CHAINS Deposit pieces of broken cast iron around the alum. post and a clear DEEP-1 magnet at the base of the alum. post as a memorial. Drive a steel fence post, 72 ins. long, 46 ins. in the ground, S, 1 lk. dist. from this point, an original improvement The northerly end of an abandoned water ditch, 3 ft. wide, 2 ft. deep, 211 ft. long, to the confluence with Mammoth Creek, bears S. 23° E., 203 ft. dist. N. 69°52' E., on line 1-2, G Association Placer, M.S. No. 1332. Across open, rolling tundra, through scattered willow brush. 55.629 Point for cor. No. 2, G Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. position. The original wood post, 4 ins. sq., 40 ins. long, mkd. 2-G-1332 was found nearby lying on top of the ground, in a disturbed condition. Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd. T 10 S

R 35 W

C2

GA

MS 1332

1986

Reset the original wood post monument inverted and alongside the alum. post and deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 37 ins. in the ground, N, 1 lk. dist.

S. 2°17' E., on line 2-3, G Association Placer, M.S. No. 1332.

Across open, rolling tundra, through scattered willow brush.

10.80 Mammoth Creek, 8 lks. wide, 2 ft. deep, course N. 30° W.

17.689

Point for cor. No. 3, G Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.

CHAINS

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, encircled by a mound of stone, 1 ft. base, to the top of the alum. cap mkd.

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.


Drive a steel fence post, 72 ins. long, 37 ins. in the ground, N, 1 lk. dist.

S. 79°41' W., on line 3-4, G Association Placer, M.S. No. 1332.

Across open, rolling tundra, through scattered willow brush.

- 51.05 Bluff Creek, 15 lks. wide, 2 ft. deep, course N. 70° W.
- Point for cor. No. 4, G Association Placer, identical with cor. No. 7, C Association Placer, M.S. No. 1332, at rotated record bearing and record dist.; there is no remaining evidence of the original cor. monument.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a mound of stone, 2 ft. base, to the top of the alum. cap mkd.



1986

Deposit a clear DEEP-1 magnet at the base of the alum. post as a memorial.

Drive a steel fence post, 72 ins. long, 36 ins. in the ground, NE, 1 lk. dist.

N. 56°45' W., on line 7-8, C Association Placer, M.S. No. 1332.

Across open, rolling tundra, through scattered willow brush.

30.030

Cor. No. 8, C Association Placer, M.S. No. 1332, hereinbefore described.

TOWNSHIP 10 SOUTH, RANGE 35 WEST KATEEL RIVER MERIDIAN, ALASKA

CHAINS	
CHAINS	GENERAL DESCRIPTION
	The land encompassed within this township is located approximately 12 miles northwesterly from the City of Nome. Access is by way of Nome-Teller Road.
	The township is drained by Penny River and Cripple River flowing southerly through the township.
	Elevations range from approximately 50 to 1,800 feet above mean sea level.
	There are abandoned placer mining works along Arctic Creek, Bluff Creek, Sunset Creek and Penny River.
i 	The township is included within U.S. Geological Survey quadrangle maps "NOME (C-2)", Alaska, 1950 edition, with minor revisions in 1973.
ļ:	

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Charles A. Higby Surveying Technician

Paul J. Price Surveying Aid

U.S. DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT ALASKA STATE OFFICE - ANCHORAGE, ALASKA

CERTIFICATE OF SURVEY

I, Michael T. Birtles, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of supplemental special instructions No. 2 bearing date of 1 April 1985, I have dependently resurveyed the west boundary and a portion of the north boundary, surveyed a portion of the north boundary and dependently resurveyed certain boundaries of certain mineral surveys within Township 10 South, Range 35 West, of the Kateel River Meridian, in the State of Alaska, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

17 April, 1996

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

Bureau of Land Management Anchorage, Alaska

The foregoing field notes of the survey described in the Certificate of Survey above executed by Michael T. Birtles, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

(Date)

(Deputy State Director for Cadastral Survey, Alaska)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SECOND STANDARD PARALLEL SOUTH, ALONG THE SOUTH BOUNDARY
OF TOWNSHIP 8 SOUTH, RANGE 35 WEST, A PORTION OF THE SOUTH BOUNDARY, AND A
PORTION OF THE SUBDIVISIONAL LINES OF TOWNSHIP 9 SOUTH, RANGE 35 WEST,
AND THE SURVEY OF A PORTION OF THE SECOND STANDARD PARALLEL SOUTH, ALONG
THE SOUTH BOUNDARY OF TOWNSHIP 8 SOUTH, RANGE 34 WEST,

AND THE EAST BOUNDARY OF

TOWNSHIP 9 SOUTH, RANGE 35 WEST

KATEEL RIVER MERIDIAN

IN THE STATE OF ALASKA

EXECUTED BY


Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856 for Sitnasuak Native Corporation

Under Special Instructions dated May 25, 2004, approved June 3, 2004, which provided for the survey included under Group No. 919, Alaska, Contract No. NAC040256, awarded August 17, 2004, and Notice to Proceed, dated August 20, 2004.

Survey Commenced: August 23, 2004

Survey Completed: August 28, 2004

INDEX DIAGRAM TOWNSHIP 9 SOUTH, RANGE 35 WEST OF THE KATEEL RIVER MERIDIAN, ALASKA

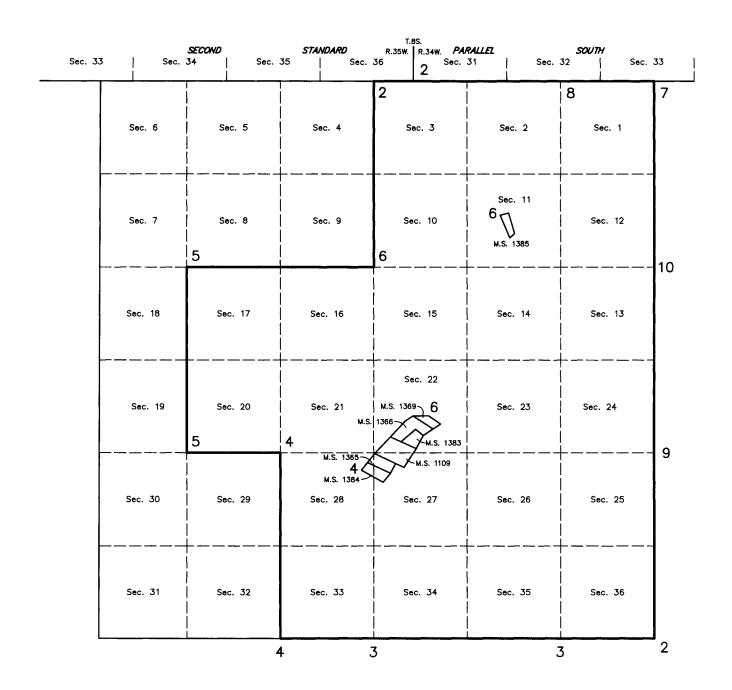

Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS

The following field notes are those of the dependent resurvey of a portion of the Second Standard Parallel South, along the south boundary of Township 8 South, Range 35 West, a portion of the south boundary, and a portion of the subdivisional lines of Township 9 South, Range 35 West; and the survey of a portion of the Second Standard Parallel South, along the south boundary of Township 8 South, Range 34 West, and the east boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska.

Mineral Survey No. 1109 was surveyed by Irving Mc.K.Reed, U.S. Mineral Surveyor, in 1913.

Mineral Surveys Nos. 1365, 1366, 1369, 1383, 1384 and 1385 were surveyed by Irving McK. Reed, U.S. Deputy Mineral Surveyor, in 1923.

A portion of Township 9 South, Range 35 West was surveyed by Maurice P. Oswald and Richard K. DeCamp for Dickinson-Oswald-Walch-Lee, Engineers, in 1975.

The Second Standard Parallel South, along a portion of the south boundary of Township 8 South, Range 35 West, was surveyed by Maurice P. Oswald and Richard K. DeCamp for Dickinson-Oswald-Walch-Lee, Engineers, in 1975.

The south boundary of Township 9 South, Range 35 West was dependently resurveyed and surveyed by Michael T. Birtles, Cadastral Surveyor, in 1984-1986.

This survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions</u>, 1973, Special Instructions for Group No. 919, Alaska, dated May 25, 2004, approved June 3, 2004, Contract No. NACO40256, awarded August 17, 2004, and Notice to Proceed, dated August 20, 2004.

The azimuth was obtained from Global Positioning System (GPS) observations and refers to the true meridian. The direction of all lines in these notes are reported as mean bearings unless otherwise indicated.

Corner positions for this survey were determined using GPS Real-Time Kinematic techniques (RTK) and were verified using GPS Rapid Static methodology.

Preliminary to the resurvey, the lines of the original surveys were retraced and a search was made for all corners and other calls of the record. Found corners were rehabilitated or remonumented based upon the found condition. No lost corners were encountered in this survey.

In accordance with the contract, lines of this survey were not brushed or blazed.

The geographic position of the corner of Townships 9 and 10 South, Ranges 34 and 35 West, Kateel River Meridian, Alaska, based upon a tie to N.G.S. Triangulation Station "BANNER", is:

Latitude 64°39'30.40" N., Longitude 165°33'53.92" W. (NAD 27)

The Dependent Resurvey of a Portion of the Second Standard Parallel South, Along the South Boundary of Township 8 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS

The magnetic declination was computed from U.S. Geological Survey Geomagix software program and database file AK-2000.COF and indicates a mean value of 14° East.

The Dependent Resurvey of a Portion of the Second Standard Parallel South, Along the South Boundary of Township 8 South, Range 35 West, Kateel River Meridian, Alaska

(Restoring the 1975 survey by Maurice P. Oswald and Richard K. DeCamp)

Beginning at the standard cor. of Tps. 8 S., Rs. 34 and 35 W., on the Second Standard Parallel South, monumented with an iron post, 2 1/2 ins. diam., firmly set, flush with a mound of stones, 3 ft. base, 18 ins. high, with brass cap mkd. SC T8S R35W R34W S36 S31 1975.

No accessories of record.

The monument is located on the crest of a rocky mountain.

West, on the S. bdy. of Sec. 36.

33.85

The closing cor. of secs. 3 and 4, on the Second Standard Parallel South, on the N. bdy. of T. 9 S., R. 35 W., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T8S R35W S36 S4 S3 T9S R35W CC 1975.

The monument is located in a low, marshy creek bottom, approximately 3 1/2 chs. east of a small creek, 10 lks. wide.

The Dependent Resurvey of a Portion of the South Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

(Restoring the 1986 survey by Michael T. Birtles)

From the cor. of Tps. 9 and 10 S., Rs. 34 and 35 W., monumented with an alum. post, 2 1/2 ins. diam., firmly set, flush with a mound of stone, 3 ft. base, 8 ins. high, with alum. cap mkd. T9S R35W R34W S36 S31 S1 S6 T10S 1986

from which the original accessories

- A schist stone, 30 x 36 ins., projecting 4 ins. above the ground, bears North, 26 lks. dist., mkd. B X O.
- A schist stone, 26 x 31 ins., projecting 4 ins. above the ground, bears S. 11° E., 8 lks. dist., mkd. B X O.

A steel fence post, projecting 42 ins. above the ground, bears North, 1 lk. dist.

The Dependent Resurvey of a Portion of the South Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS	
	The monument is located on moderately sloping, rocky tundra.
	From this point, National Geodetic Survey geodetic control station "BANNER", bears S. 85°56'06" E. (forward bearing), 610.67 chs. dist., monumented with a standard bronze disk, welded to the top of an iron pipe, 2 ins. diam., projecting 10 ins. above the ground, mkd. BANNER 1944.
	The monument is located on a low, flat ridge in dense alders mixed with willows.
	N. 89°59' W., between secs. 1 and 36.
80.03	The cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above a mound of stone, 3 ft. base, 10 ins. high, with alum. cap mkd. T9S R35W S35 S36 S2 S1 T10S 1986
	from which the original accessories
	A schist stone, 6 x 24 ins., projecting 12 ins. above the ground, bears N. 77° E., 58 lks. dist., mkd. B X O.
	A schist stone, 18 x 30 ins., projecting 4 ins. above the ground, bears N. 53° W., 46 lks. dist., mkd. B X O.
	A steel fence post, projecting 42 ins. above the ground, bears South, 1 lk. dist.
	The monument is located on moderately sloping, rocky tundra.
	N. 89°59' W., between secs. 2 and 35.
79.99	Point for the cor. of secs. 2, 3, 34 and 35, at proportionate dist., on the S. bdy. of the Tp., not monumented.
	N. 89°59' W., between secs. 3 and 34.
79.99	The cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., monumented with an alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with alum. cap mkd. T9S R35W S33 S34 S4 S3 T10S 1986.
	A nearly indistinct mound of earth lies north of the cor.
	Shallow, nearly indistinct, pits are located East and West of the monument, 3 ft. dist.
	A steel fence post, projecting 48 ins. above the ground, bears South, 1 lk. dist.
,	The monument is located on gently sloping ground in dense, low willow brush.
÷ 1	S. 89°59' W., between secs. 4 and 33.

The Dependent Resurvey of a Portion of the South Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS

80.00

The cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., leaning slightly to the west, projecting 10 ins. above the ground, with brass cap incorrectly mkd. T9S R35W S32 S3 S5 S4 T10S 1975. Straightened and firmed to now project 8 ins. above the ground and add mks. to complete S33.

A mound of stone, 2 ft. base, 2 ft. high, bears West, 1 lk. dist.

The monument is located on open, moderately sloping tundra.

The Dependent Resurvey of a Portion of the Subdivisional Lines of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

(Restoring the 1975 survey by Maurice P. Oswald and Richard K. DeCamp)

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., hereinbefore described.

N. 0°07' W., between secs. 32 and 33.

80.00

Point for the cor. of secs. 28, 29, 32 and 33, at proportionate dist., not monumented.

N. 0°07' W., between secs. 28 and 29.

80.00

The cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T9S R35W S20 S21 S29 S28 1975.

No accessories of record.

The monument is located on open, gently sloping tundra.

From this point, cor. No. 4, Mineral Survey No. 1384, bears S. 77°53' E., 71.21 chs. dist., monumented with a fir post, 36 ins. long, 4 ins. square, projecting 30 ins. above the ground, with unreadable scribe marks barely discernable.

No accessories of record.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.



2004

The Dependent Resurvey of a Portion of the Subdivisional Lines of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS	
	from which the new accessories
	A magnet in a metallic silver plastic case, bears N. 83° E., 15 lks. dist., buried 18 ins. below the ground.
	A magnet in a fluorescent orange plastic case, bears N. 17° W., 15 lks. dist., buried 18 ins. below the ground.
	Deposit a magnet in a clear plastic case at the base of the stainless steel post and lay the original wood post alongside.
	Drive an alum. rod, 3 ft. long, 3/4 in. diam., 2.5 ft. in the ground, N. 17° W., 10 lks. dist., with an orange triangular marker on the top.
	The monument is located in a small grassy clearing on a west facing slope with patches of dense willow brush.
	N. 89°58' W., between secs. 20 and 29.
79.99	The cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T9S R35W S19 S20 S30 S29 1975.
ļ	A mound of stone, 3 ft. base, 2 ft. high, bears West, 1 lk. dist.
	The monument is located on gently sloping ground in dense willow brush, approximately 2 chs. east of the main branch of Cripple River.
	N. 0°09' W., between secs. 19 and 20.
79.99	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate dist., not monumented.
	N. 0°09' W., between secs. 17 and 18.
79.99	The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 1/2 ins. diam., leaning to the southwest, projecting 10 ins. above the ground, with brass cap mkd. T9S R35W S7 S8 S18 S17 1975. Straightened and firmed to now project 6 ins. above the ground.
	A mound of stones, 2 ft. base, 2 ft. high, bears West, 1 lk. dist.
	The monument is located on level, rocky tundra with scattered patches of low willow brush.
	S. 89°59' E., between secs. 8 and 17.
80.07	Point for the cor. of secs. 8, 9, 16 and 17, at proportionate dist., not monumented.

The Dependent Resurvey of a Portion of the Subdivisional Lines of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS

S. 89°59' E., between secs. 9 and 16.

80.07

The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 1/2 ins. diam., leaning to the east, projecting 18 ins. above the ground, with brass cap mkd. T9S R35W S9 S10 S16 S15 1975. Straightened, firmed, and raised a mound of stone, 3 ft. base, 15 ins. high, around the monument which now projects 3 ins. above the mound of stone.

A mound of stone, 2 ft. base, 1 ft. high, bears West, 1 lk. dist.

The monument is located at the top end of a rocky ravine, 35 ft. deep, approximately 1 1/2 chs. west of a small creek, 5 lks. wide.

From this point, cor. No. 1, Mineral Survey No. 1385, bears N. 67°28'33" E. (forward bearing), 117.04 chs. dist., monumented with a mound of stone, 2 ft. wide, 4 ft. long, 2 ft. high, and a wooden stake, 1 in. X 2 ins., projecting 6 ins. above the mound of stones. Unable to find chisel marks on any of the stones.

No accessories of record.

from which the new accessories

- A magnet in a metallic silver plastic case, bears N. 32° E., 15 lks. dist., buried 12 ins. below the ground.
- A magnet in a fluorescent pink plastic case, bears S. 58° E., 15 lks. dist., buried 8 ins. below the ground, to solid rock, with small rock mound over the top.

Deposit a magnet in a clear plastic case at the base of the mound of stones.

Drive an alum. rod, 3 ft. long, 3/4 in. diam., 2.5 ft. in the ground, East, 10 lks. dist., with an orange triangular marker on the top.

The monument is located on a steep east facing side slope, approximately 55 lks. southwest of an old ditch, 15 lks. wide, 6 lks. deep. and 175 lks. southwest of Aurora Creek.

From this same point, cor. No. 2, Mineral Survey No. 1369, bears S. 20°14'30" E. (forward bearing), 136.20 chs. dist., determined at a hole in the ground, approximately the same size as a schist stone, 26 X 6 X 9 ins. lying alongside, broken in half lengthwise, and with fragmentary chisel mks. 2-1369 barely discernable. Reset the stone in the hole and firm around it.

No accessories of record.

from which the new accessories

A magnet in a fluorescent blue plastic case, bears S. 45° W., 15 lks. dist., buried 18 ins. below the ground.

The Dependent Resurvey of a Portion of the Subdivisional Lines of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS

A magnet in a fluorescent orange plastic case, bears N. 45° W., 15 lks. dist., buried 10 ins. below the ground, to solid rock.

Deposit a magnet in a clear plastic case under the stone monument.

Drive an alum. rod, 3 ft. long, 3/4 in. diam., 1.3 ft. in the ground, West, 10 lks. dist., with an orange triangular marker on the top.

The monument is located on top of a ridge which bears S. 15° E. and N. 15° W.

N. 0°05' W., between secs. 9 and 10.

Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist., not monumented.

N. 0°05' W., between secs. 3 and 4.

80.00 The closing cor. of secs. 3 and 4, on the Second Standard Parallel South, on the N. bdy. of the Tp., hereinbefore described.

The Survey of a Portion of the Second Standard Parallel South, Along the South Boundary of Township 8 South, Range 34 West, Kateel River Meridian, Alaska

From the closing cor. of Tps. 9 S., Rs. 34 and 35 W., on the Second Standard Parallel South, established at protracted postion.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

from which

- A magnet in a fluorescent pink plastic case, bears S. 45° E., 15 lks. dist., buried 18 ins. below the ground.
- A magnet in a fluorescent blue plastic case, bears S. 45° W., 15 lks. dist., buried 18 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

The Survey of a Portion of the Second Standard Parallel South, Along the South Boundary of Township 8 South, Range 34 West, Kateel River Meridian, Alaska

CHAINS		
CHAINS	Drive an alum. rod, 3 ft. long, 3/4 in. diam., 2.5 ft. in the ground, S. 45° E., 10 lks. dist., with an orange triangular marker on the top.	
	The monument is located on a north facing slope in dense willows, approximately 4 chs. south of a small creek, 15 lks. wide.	
	West, on the S. bdy. of sec. 33.	
45.99	Point for the standard cor. of secs. 32 and 33, on the Second Standard Parallel South, not monumented.	
	West, on the S. bdy. of sec. 32.	
34.01	Point for the closing cor. of secs. 1 and 2, T. 9 S., R. 35 W., on the Second Standard Parallel South.	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.	
	T8S R34W S32	
	S2 S1 T9S R35W CC	
	from which	
	A magnet in a fluorescent pink plastic case, bears S. 45° E., 15 lks. dist., buried 18 ins. below the ground.	
	A magnet in a fluorescent blue plastic case, bears S. 45° W., 15 lks. dist., buried 18 ins. below the ground.	
	Deposit a magnet in a clear plastic case at the base of the stainless steel post.	
	Drive an alum. rod, 3 ft. long, 3/4 in. diam., 2.5 ft. in the ground, S. 45° E., 10 lks. dist., with an orange triangular marker on the top.	
	The monument is located on a north facing slope in scattered, low willows.	
80.00	Point for the standard cor. of secs. 31 and 32, T. 8 S., R. 35 W., on the Second Standard Parallel South.	
	West, on the S. bdy. of sec. 31.	
34.01	Point for the closing cor. of secs. 2 and 3, on the Second Standard Parallel South, on the N. bdy. of the Tp., not monumented.	
80.00	The standard cor. of Tps. 8 S., Rs. 34 and 35 W., on the Second Standard Parallel South, hereinbefore described.	

The Survey of the East Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS		
	The Survey of the East Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska	
	From the cor. of Tps. 9 and 10 S., Rs. 34 and 35 W., hereinbefore described.	
	North, between secs. 31 and 36.	
80.00	Point for the cor. of secs. 25, 30, 31 and 36, on the east boundary of the township, not monumented.	
	North, between secs. 25 and 30.	
80.00	Point for the cor. of secs. 19, 24, 25 and 30, on the east boundary of the township.	
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., ins. in the ground, with brass cap mkd.		
	T9S R35W R34W S24 S19	
	S25 S30	
	2004 from which	
	A magnet in a metallic silver plastic case, bears N. 45° E., 15 lks. dist., buried 16 ins. below the ground.	
	A magnet in a fluorescent pink plastic case, bears S. 45° E., 15 lks. dist., buried 16 ins. below the ground.	
	A magnet in a fluorescent blue plastic case, bears S. 45° W., 15 lks. dist., buried 16 ins. below the ground.	
	A magnet in a fluorescent orange plastic case, bears N. 45° W., 15 lks. dist., buried 16 ins. below the ground.	
	Deposit a magnet in a clear plastic case at the base of the stainless steel post.	
	Drive an alum. rod, 3 ft. long, 3/4 in. diam., 2.5 ft. in the ground, S. 45° E., 10 lks. dist., with an orange triangular marker on the top.	
	The monument is located in open, rocky tundra on a west facing slope.	
	North, between secs. 19 and 24.	

The Survey of the East Boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS 80.00	Point for the cor. of secs. 13, 18, 19 and 24, on the east boundary of the township, not monumented.		
	North, between secs. 13 and 18.		
80.00	Point for the cor. of secs. 7, 12, 13 and 18, on the east boundary of the township.		
;	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.		
	T9S R35W R34W S12 S7 S13 S18		
	from which		
	A magnet in a metallic silver plastic case, bears N. 45° E., 15 lks. dist., buried 12 ins. below the ground.		
	A magnet in a fluorescent pink plastic case, bears S. 45° E., 15 lks. dist., buried 12 ins. below the ground. A magnet in a fluorescent blue plastic case, bears S. 45° W., 15 lks. dist., buried 18 ins. below the ground. A magnet in a fluorescent orange plastic case, bears N. 45° W., 15 lks. dist., buried 18 ins. below the ground.		
	Deposit a magnet in a clear plastic case at the base of the stainless steel post. Drive an alum. rod, 6 ft. long, 3/4 in. diam., 4.8 ft. in the ground, with a rock collar, S. 45° E., 10 lks. dist., with an orange triangular marker on the top.		
	The monument is located on a rocky northeast facing slope with scattered low willow brush, approximately 30 lks. south of a small creek, 6 lks. wide.		
	North, between secs. 7 and 12.		
80.00	Point for the cor. of secs. 1, 6, 7 and 12, on the east boundary of the township, not monumented.		
	North, between secs. 1 and 6.		
79.98	The closing cor. of Tps. 9 S., Rs. 34 and 35 W., on the Second Standard Parallel South, hereinbefore described.		

Township 9 South, Range 35 West, Kateel River Meridian, Alaska

CHAINS				
	GENERAL DESCRIPTION			
	Township 9 South, Range 35 West is located approximately 12 miles northwest of Nome, Alaska.			
	The land is primarily steep rocky tundra slopes with numerous small creeks and widely scattered patches of low willow brush.			
	Frost was encountered at a depth of 22 ins. in the soils which consist of sand and peat.			
	Access to the survey was by helicopter.			

U.S. Department of the Interior Bureau of Land Management Alaska State Office-Anchorage, Alaska

FIELD ASSISTANTS

NAME	CAPACITY
Charles W. Lamb	Party Chief
Jason A. Madsen	Party Chief
Daryl K. Moistner	Party Chief
Rafal Lizak	Survey Technician

CERTIFICATE OF SURVEY

I, Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, for Sitnasuak Native Corporation, HEREBY CERTIFY upon honor that, in pursuance of the Special Instructions bearing the date of the 25th day of May, 2004, and Contract No. NAC040256 bearing the award date of the 17th day of August, 2004, I have dependently resurveyed a portion of the Second Standard Parallel South, along the south boundary of Township 8 South, Range 35 West, a portion of the south boundary, and a portion of the subdivisional lines of Township 9 South, Range 35 West; and surveyed a portion of the Second Standard Parallel South, along the south boundary of Township 8 South, Range 34 West, and the east boundary of Township 9 South, Range 35 West, Kateel River Meridian, Alaska, which are represented in the foregoing field notes as having been executed by me and under my direction, and that said survey has been made in strict conformity with said Special Instructions, The Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described in the foregoing field notes.

6-14-2005 (Date)



CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT Anchorage, Alaska

The foregoing field notes of the survey described in the Certificate of Survey above executed by Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, for Sitnasuak Native Corporation, having been critically examined and found correct, are hereby approved.

(Date) (Deputy State Director for Cadastral Survey, Alaska)

CERTIFICATE OF TRANSCRIPT

BUREAU OF LAND MANAGEMENT Anchorage, Alaska

I CERTIFY that the foregoing transcript of the field notes of the above described survey is a true copy of the original field notes.

(Date) (Deputy State Director for Cadastral Survey, Alaska)